






### Specifications

|                           |                                      |  |
|---------------------------|--------------------------------------|--|
| Operating voltage         | 30 Vp-p max.                         |  |
| Current consumption       | 7 mA max.                            | at 10 Vp-p, square wave, 2.5 KHz         |
| Sound pressure level      | 80 db min.                           | at 10 cm / 10 Vp-p, square wave, 2.5 KHz |
| Electrostatic capacitance | 18,000 pF $\pm$ 30%                  | at 120 Hz / 1 V                          |
| Operating temperature     | -30 ~ +85° C                         |  |
| Storage temperature       | -40 ~ +95° C                         |  |
| Dimensions                | $\phi$ 22.0 x H5.5 mm                |  |
| Weight                    | 1.5 g max.                           |  |
| Material                  | ABS UL-94 1/16" HB High Heat (Black) |  |
| Terminal                  | Pin type (Au Plating)                |  |
| RoHS                      | yes                                  |  |

### Appearance Drawing

Tolerance:  $\pm$ 0.5

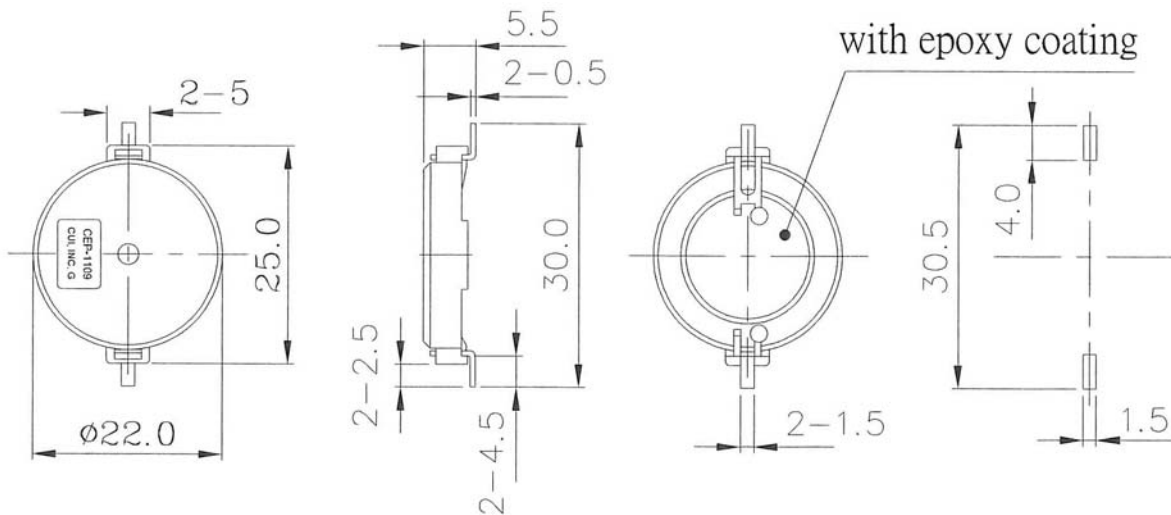

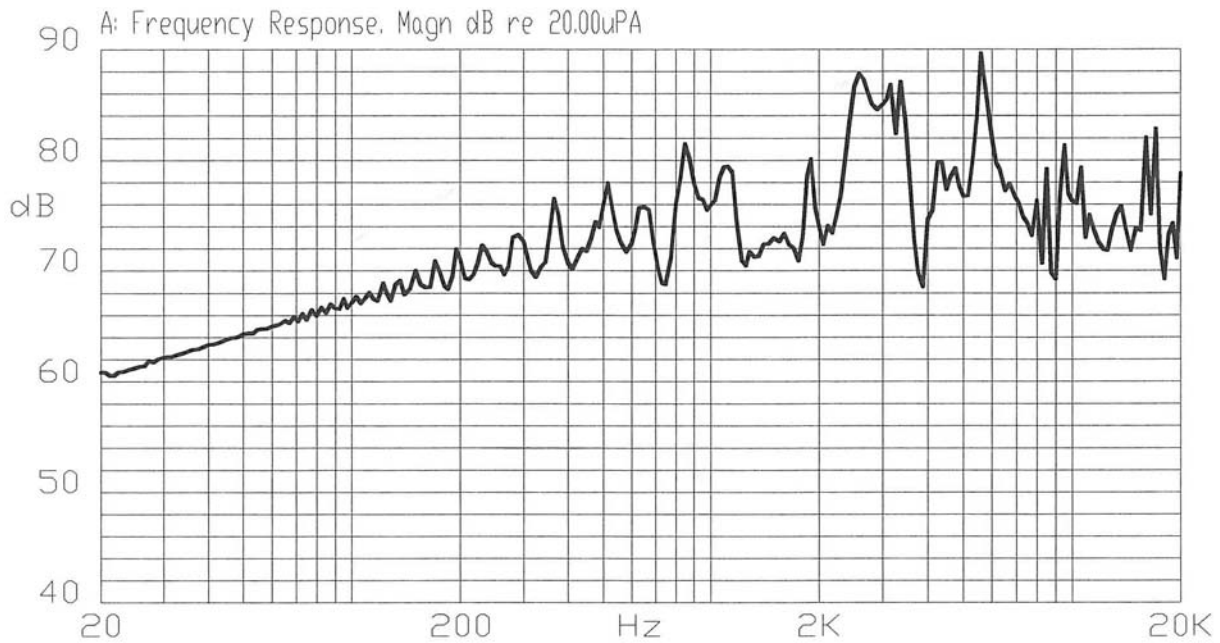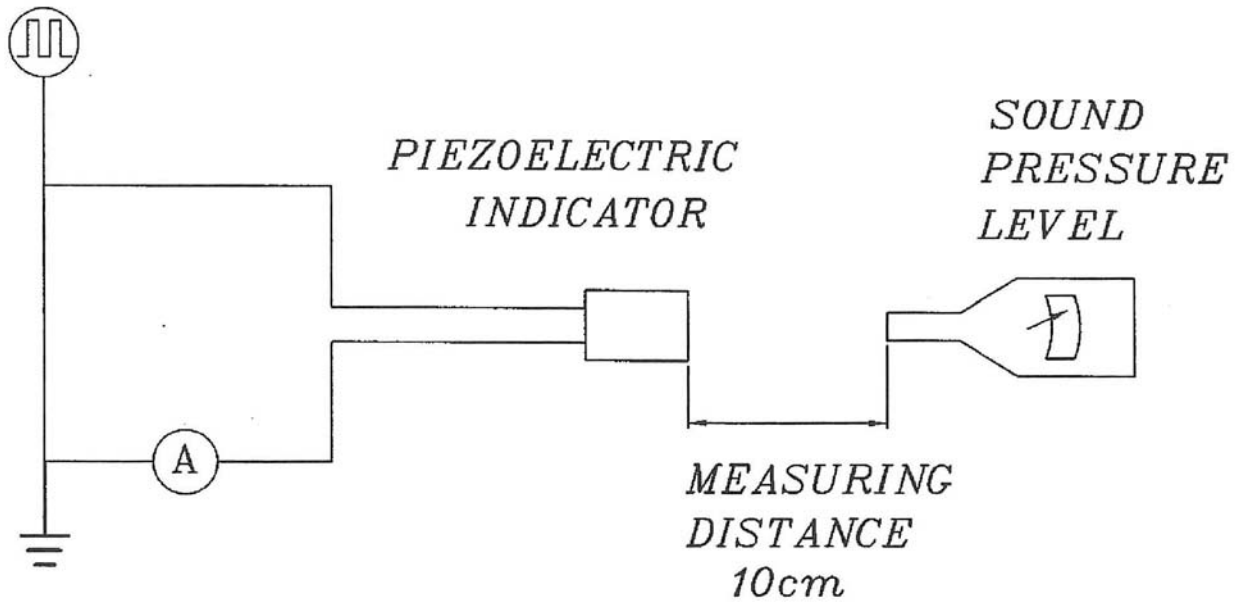**Typical Frequency Response Curve**

**Measurement Method**


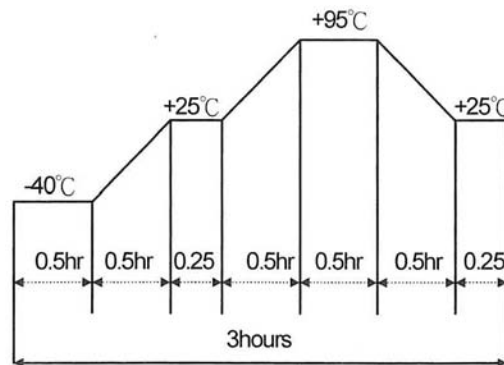
S.P.L. Measuring Circuit  
 Input Signal: 10 V p-p, 2.5 KHz, Square Wave  
 Mic: RION UC 30 or equivalent  
 S.G.: Hewlett Packard 33120A Function Generator or equivalent

### Mechanical Characteristics

| Item                         | Test Condition   | Evaluation Standard  |
|------------------------------|--|--|
| Solderability                | Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of $270 \pm 5^{\circ}\text{C}$ for $3 \pm 1$ seconds.  | 90% min. of the lead terminals will be wet with solder.<br>(Except the edge of the terminal)   |
| Soldering Heat Resistance    | Lead terminals are immersed up to 1.5mm from buzzer's body in solder bath of $300 \pm 5^{\circ}\text{C}$ for $3 \pm 0.5$ or $260 \pm 5^{\circ}\text{C}$ for $10 \pm 1$ seconds.  | No interference in operation.  |
| Terminal Mechanical Strength | For 10 seconds, the force of 9.8N (1.0kg) is applied to each terminal in axial direction.  | No damage or cutting off.  |
| Vibration                    | The buzzer should be measured after applying a vibration amplitude of 1.5 mm with 10 to 55 Hz band of vibration frequency to each of the 3 perpendicular directions for 2 hours. | The value of oscillation frequency/current consumption should be $\pm 10\%$ of the initial measurements. The SPL should be within $\pm 10\text{dB}$ compared with the initial measurement. |
| Drop Test                    | The part will be dropped from a height of 75 cm onto a 40 mm thick wooden board 3 times in 3 axes (X, Y, Z) for a total of 9 drops.  |  |

### Environment Test

| Item             | Test Condition   | Evaluation Standard   |
|------------------|--|---|
| High temp. test  | After being placed in a chamber at $+95^{\circ}\text{C}$ for 240 hours.                                    | The buzzer will be measured after being placed at $+25^{\circ}\text{C}$ for 4 hours. The value of the oscillation frequency/current consumption should be $\pm 10\%$ compared to the initial measurements. The SPL should be within $\pm 10\text{dB}$ compared to the initial measurements. |
| Low temp. test   | After being placed in a chamber at $-40^{\circ}\text{C}$ for 240 hours.                                    |   |
| Humidity test    | After being placed in a chamber at $+40^{\circ}\text{C}$ and $90 \pm 5\%$ relative humidity for 240 hours. |   |
| Temp. cycle test | The part shall be subjected to 5 cycles. One cycle will consist of:  |   |





**Reliability Test**



| <b>Item</b>           | <b>Test Condition</b>   | <b>Evaluation Standard</b>  |
|-----------------------|---|---|
| Operating (Life Test) | <p>1. Continuous life test:<br/>The part will be subjected to 48 hours of continuous operation at +70°C with rated voltage applied.</p> <p>2. Intermittent life test:<br/>A duty cycle of 1 minute on, 1 minute off, a minimum of 5,000 times at room temp (+25 ±2°C) with rated voltage applied.</p> | The buzzer will be measured after being placed at +25°C for 4 hours. The value of the oscillation frequency/current consumption should be ±10% compared to the initial measurements. The SPL should be within ±10dB compared to the initial measurements. |

**Test Conditions**

|                          |                            |                       |                            |
|--------------------------|----------------------------|-----------------------|----------------------------|
| Standard Test Condition  | a) Temperature: +5 ~ +35°C | b) Humidity: 45 - 85% | c) Pressure: 860-1060 mbar |
| Judgement Test Condition | a) Temperature: +25 ±2°C   | b) Humidity: 60 - 70% | c) Pressure: 860-1060 mbar |



**Packaging**

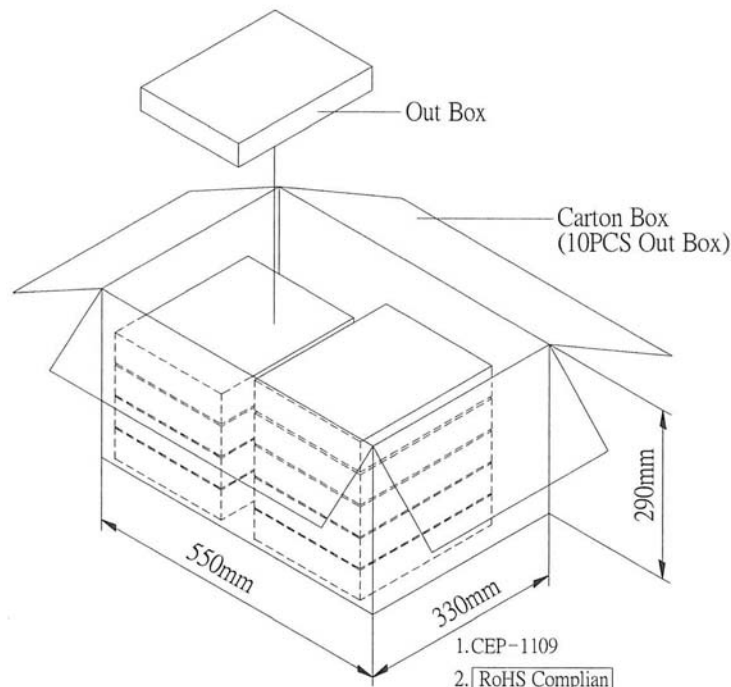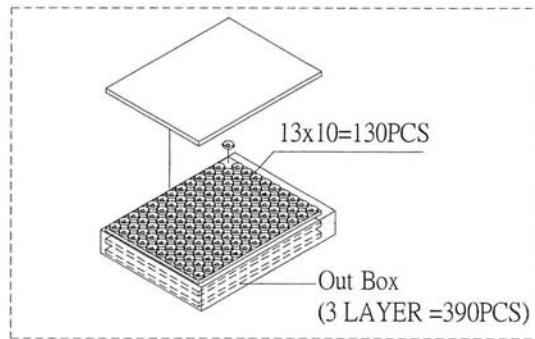

|            |                   |                    |
|------------|-------------------|--------------------|
| Out Box    | 310mmx248mmx49mm  | 3x130PCS=390PCS    |
| Carton Box | 550mmx330mmx290mm | 390PCSx10=3,900PCS |