


# Digital Panel Meter K3TG

## Subminiature Digital Panel Meter that Accepts DC Input

- Ultra-compact DIN-size (48 x 24 (W x H)) body.
- Mounting thickness of only 2 mm required.
- Highly visible display with 10.2-mm-high LEDs.
- 5-VDC power supply for control.

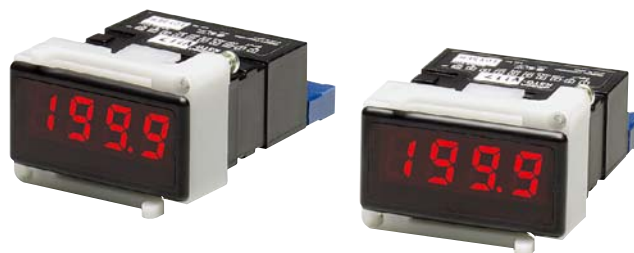

## Model Number Structure

### Model Number Legend

K3TG -      
           1    2    3    4

#### 1, 2. Input Code

- V1:  $\pm 199.9$  mV
- V2:  $\pm 1.999$  V
- V3:  $\pm 19.99$  V
- V4:  $\pm 199.9$  V

#### 3. Series No.

- 1: Current series

#### 4. Supply Voltage


- 7: 5 VDC (not internally insulated)

## Ordering Information

### List of Models

Range	Measuring ranges	Supply voltage
		5 VDC (not internally insulated)
DC voltage	$\pm 199.9$ mV	K3TG-V117
	$\pm 1.999$ V	K3TG-V217
	$\pm 19.99$ V	K3TG-V317
	$\pm 199.9$ V	K3TG-V417

### Accessories (Order Separately)

Name	Appearance	Model
Water-resistive Soft Front Cover		K32-L24SC

# Specifications

## ■ Ratings

Supply voltage	5 VDC (not internally insulated)		
Operating voltage range	-5% to +5% of supply voltage		
Power consumption	0.3 W (at max. DC load)		
Insulation resistance	10 MΩ min. (at 500 VDC) between external terminal and case		
Dielectric strength	2,000 VAC min. for 1 min between external terminal and case		
Noise immunity	±200 V on power supply terminals in normal mode ±500 V on power supply terminals in common mode		
Vibration resistance	Malfunction: 10 to 55 Hz, 0.5-mm single amplitude for 10 min each in X, Y, and Z directions Destruction: 10 to 55 Hz, 0.75-mm single amplitude for 2 hrs each in X, Y, and Z directions		
Shock resistance	Malfunction: 98 m/s <sup>2</sup> for 3 times each in 6 directions Destruction: 294 m/s <sup>2</sup> for 3 times each in 6 directions		
Ambient temperature	Operating: -10° to 55°C (with no icing) Storage: -20° to 65°C (with no icing)		
Ambient humidity	Operating: 35% to 85% (with no condensation)		
Ambient operating atmosphere	No corrosive gas		
EMC	(EMI)	EN61326+A1	Industry
	Emission Enclosure:	CISPR 11 Group 1 class A: CISRP16-1/-2	
	Emission AC Mains:	CISPR 11 Group 1 class A: CISRP16-1/-2	
	(EMS)	EN61326+A1	Industry
	Immunity ESD:	EN61000-4-2:	4 kV contact discharge (level 2) 8 kV air discharge (level 3)
	Immunity RF-interference:	EN61000-4-3:	10 V/m (amplitude-modulated, 80 MHz to 1 GHz) (level 3)
	Immunity Fast Transient Noise:	EN61000-4-4:	2 kV (power line) (level 3)
	Immunity Burst Noise:		1 kV line to line (I/O signal line)
	Immunity Surge:	EN61000-4-5:	1 kV line to line 2 kV line to ground (power line)
	Immunity Conducted Disturbance	EN61000-4-6:	3 V (0.15 to 80 MHz) (level 2)
	Immunity Voltage Dip/Interrupting	EN61000-4-11:	0.5 cycles, 0, 180°, 100% (rated voltage)

## ■ Characteristics

Input signal	DC voltage
A/D conversion method	Double integral method
Sampling period	2.5 times/s
Display refresh period	2.5 times/s
Max. displayed digits	3 1/2 digits (+1999)
Display	7-segment red LED
Decimal point display position	By short-circuiting terminals
Sign display	"-" is displayed automatically with a negative input signal.
Overflow/underflow display	Overflow: #□□□ Underflow: - #□□□
Zero suppression	Not supported.
External control	Process value hold (terminals on rear panel short-circuited)
Degree of protection	Front panel: IEC IP51 (see note) Case: IEC IP20 Terminals: IEC IP00

**Note:** IP51 is maintained when the water-resistant soft cover and bracket are used. IP50 will be, however, maintained without these water-resistant accessories.

## ■ Measuring Ranges


Input range	Measuring range	Max. resolution	Input impedance	Accuracy	Max. permissible load
DC voltage	±199.9 mV	100 μV	100 MΩ	±0.1%rdg ±1 digit	±250 V
	±1.999 V	1 mV	100 MΩ	±0.1%rdg ±1 digit	±250 V
	±19.99 V	10 mV	10 MΩ	±0.1%rdg ±1 digit	±250 V
	±199.9 V	100 mV	10 MΩ	±0.1%rdg ±1 digit	±350 V

**Note:** The above accuracy is at an ambient temperature of 23±5°C.

# Connections

## External Connections

External Connection (Connector and connector screws are provided with the model.)

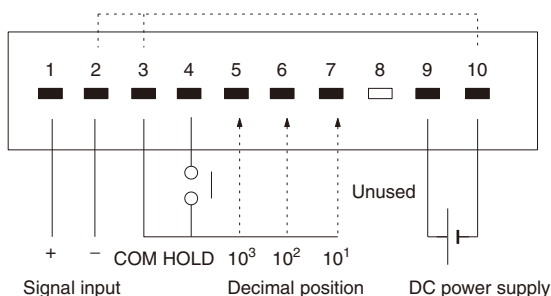

### Conformance to EN/IEC Standards

To ensure conformance to EN/IEC standards in machinery that incorporates the K3TG, ensure that input signal lines are less than 30 m.

- Note:** 1. Terminals 2 and 3 and 10 are not internally insulated. Connect a relay with high contact reliability and insulation (with a minimum load current of 0.3 mA) or a photocoupler with high insulation (with a residual voltage of 1 V max. and a current leakage of 0.1 mA max.) to these terminals for external control. The use of an independent power supply is recommended for the Digital Panel Meter.
- 2. Terminal 8 is not used. Do not use this terminal for transmission of signals.

## Nomenclature




Select the decimal position with terminal 5, 6, or 7 on the rear panel.




## Dimensions


**Note:** All units are in millimeters unless otherwise indicated.

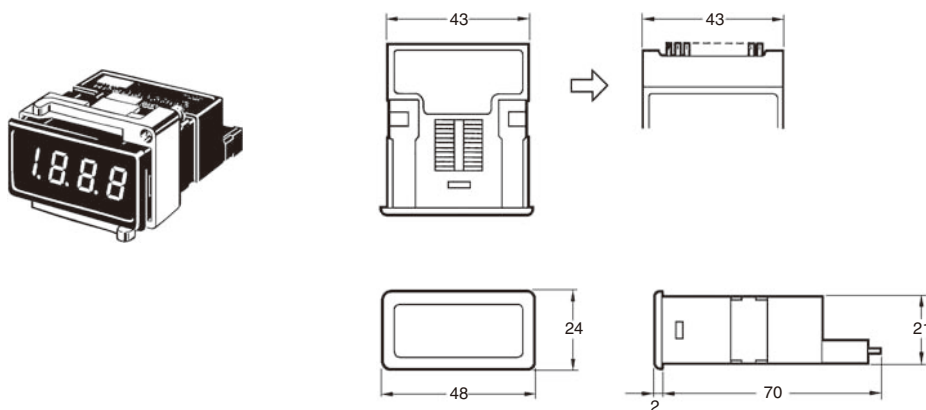

### Panel Cutouts

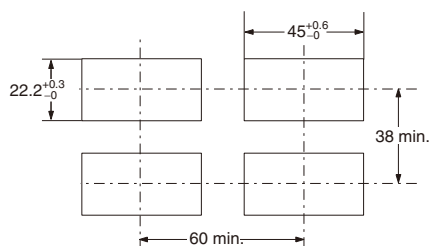

### LED Indicator Size




**Note:** The values above are recommended values. Do not group-mount the meters at intervals less than the recommended ones.

# Application Examples

## High DC Voltage Measurement

When voltage exceeding the maximum voltage in the standard range is measured (for example: more than 200 V), a divider is connected externally.

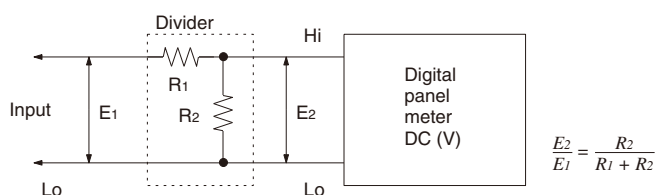

## Safety Precautions

### ■ Precautions for Correct Use

Refer to *Safety Precautions for All Digital Panel Meters*.

#### Mounting

Recommended panel thickness is 1 to 3.2 mm.

Mount the Digital Panel Meter by attaching the mounting bracket supplied as an accessory from the rear of the Digital Panel Meter and hooking the mounting bracket to the Digital Panel Meter securely.

Tighten the mounting screws by turning them clockwise with a tightening torque of 4 kgf·cm (0.39 N·m).

To dismount the Digital Panel Meter, loosen the screws and widen the hooks.

Mount the Digital Panel Meter as horizontally as possible.

#### Calibration

Calibrate the Digital Panel Meter regularly so that the Digital Panel Meter can maintain processing accuracy.

Use a standard signal generator with an accuracy of 99.99% min. for calibration.

For the precise calibration methods, refer to the Instruction Sheet for the Digital Panel Meter.


#### Control Power Supply

Use a control power supply with a ripple rate of 10% max.

### Accessories (Order Separately)

#### Water-resistant Soft Front Cover

Before mounting the Digital Panel Meter to a panel, attach the water-resistant soft front cover and mounting bracket to the Digital Panel Meter properly so that the Digital Panel Meter will maintain IP51 water-resistant standards.

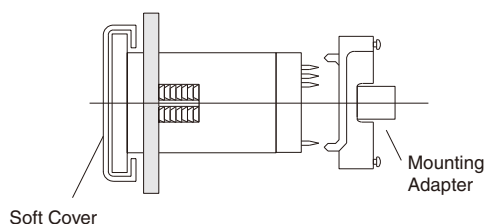

**Note:** Be sure to use the Water-resistant Soft Front Cover and mounting bracket together.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

# Safety Precautions for All Digital Panel Meters

Refer to the *Precautions* section for each Digital Panel Meter for specific precautions applicable to each Digital Panel Meter.

## ⚠ WARNING

Electrocution may possibly occur. Never touch terminals when the power is ON. During operation, be sure that all terminal covers are attached to models for which terminal covers are included.



Serious injury, significant property damage, or a serious accident resulting from abnormal operation may possibly occur. Never use the product on a network without a protective circuit. Provide double or triple safety measures, including emergency stop circuits, interlock circuits, and limit circuits, in external control circuits to ensure safety in the entire system if an abnormality occurs due to malfunction of the product or another external factor affecting the product's operation.



## ⚠ CAUTION

Minor electric shock, fire, or malfunction may occasionally occur. Do not allow pieces of metal, wire, or fine metal shavings or filings from installation work to enter the product.



Moderate or minor injury or property damage resulting from explosion may occasionally occur. Do not use the product in locations where flammable or explosive gases are present.



Do not use the K3HB-X for measurements within Measurement Categories III, or IV (according to IEC 61010-1), and do not use the K3HB-S, K3HB-V, K3HB-H, K3HB-R, K3HB-P, K3HB-C, K3MA-J, K3MA-L, K3MA-F, or K3GN for measurements within Measurement Categories II, III, or IV (according to IEC 61010-1). Otherwise, unexpected operation, resulting in minor or moderate injury, or damage to the equipment may occasionally occur. Use the equipment for measurements only within the Measurement Category for which the product is designed.



Minor or moderate injury, or damage to equipment resulting from unexpected operation may occasionally occur. Do not operate the product if the settings of the product do not match the application. Be sure to make the correct the settings according to the application.



Property damage to equipment or facilities connected to the product may occasionally occur if the comparative outputs cease to operate resulting from product failure. Do not operate the product unless measures, such as installing a separate monitoring system, have been taken to ensure safety.



Minor or moderate injury, or damage to equipment resulting from fire may occasionally occur if screws become loose. Do not operate the product unless the screws on the terminal block and the connector locking screws have been tightened securely using a tightening torque within the following ranges.



Terminal block screws: 0.74 to 0.90 N·m for M3.5 screws,  
0.43 to 0.58 N·m for M3 screws

Confirm the designated torque for connector locking screws for each specific model.

Minor or moderate injury, or damage to equipment resulting from unexpected operation following changes to online edit programs may occasionally occur. Do not operate the product unless it has been confirmed that no adverse effects will result even if the DeviceNet cycle time is extended.



Minor or moderate injury, or damage to equipment resulting from unexpected operation may occasionally occur when transferring a program to another node or changing the contents of the I/O memory. Do not perform either of these operations without confirming safety at the destination node.



Minor or moderate injury resulting from electric shock may occasionally occur. Do not attempt to disassemble, repair, or modify the product.



## ■ Precautions for Safe Use

- Do not use the product in the following locations:
  - Locations subject to direct radiant heat from heating equipment
  - Locations where the product may come into contact with water or oil
  - Outdoor locations or locations subject to direct sunlight
  - Locations where dust or corrosive gases (in particular, sulfuric or ammonia gas) are present
  - Locations subject to extreme temperature changes
  - Locations where icing or condensation may occur
  - Locations subject to excessive shocks or vibration
- Do not use the product in locations subject to temperatures or humidity levels outside the specified ranges or in locations prone to condensation. If the product is installed in a panel, ensure that the temperature around the product (not the temperature around the panel) does not go outside the specified range.
- Provide sufficient space around the product for heat dissipation.
- Heat generated by the product itself can raise its interior temperature and shorten its service life. Do not install multiple products side-by-side or stacked one on top of the other. If this kind of installation cannot be avoided, provide the products with forced cooling, such as that using fans.
- The service life of the output relays depends on the switching capacity and switching conditions. Consider the actual application conditions and use the product within the rated load and electrical service life. Using the product beyond its service life may result in contact welding or burning.
- Install the product horizontally.
- Install each product on a designated panel of the recommended thickness.
- When using crimp terminals or bare conductor connections, use the parts and materials that are designated for each model.

Item Model	Crimp terminal	Bare conductor connection		Sheath stripping allowance
		Power supply	Other than power supply	
K3TF	M3.5	AWG22 to AWG14 (cross-sectional area: 0.326 to 2.081 mm <sup>2</sup> )	AWG22 to AWG16 (cross-sectional area: 0.326 to 1.309 mm <sup>2</sup> )	6 to 8 mm
K3HB Series K3MA Series K3GN	M3, width of 5.8 mm max.		AWG28 to AWG16 (cross-sectional area: 0.081 to 1.309 mm <sup>2</sup> )	

- To prevent inductive noise, wire the lines connected to the product separately from power lines carrying high voltages or currents. Do not wire in parallel with or in the same cable as power lines. Other measures for reducing noise include running lines along separate ducts and using shielded wires.
- Make sure that the rated voltage is achieved within 2 s after turning ON the power.
- Allow the product to warm up for at least 15 minutes after the power is turned ON.
- Do not install the product near devices generating strong high-frequency waves or surges. When using a noise filter, check the voltage and current and install it as close to the product as possible.
- Do not use thinner to clean the product. Use commercially available alcohol for cleaning.
- Be sure to confirm the name and polarity for each terminal before wiring the terminal block and connectors.
- Use the product within the specified supply voltage and rated load.
- Do not connect anything to unused terminals.

- Outputs turn OFF when the mode is changed or settings are initialized. Take this into consideration when setting up the control system.
- Install and provide proper indications for a switch or circuit breaker that complies with the requirements of IEC 60947-1 and IEC 60947-3 to enable the operator to quickly turn OFF the power.
- Provide a DeviceNet communications distance that satisfies the range given in the specifications, and use the designated communications cable. For cable details, refer to the *DeviceNet Catalog* (Cat. No. Q102).
- Do not bend or pull the DeviceNet communications cable with excessive force.
- Do not attach or remove connectors with the DeviceNet power turned ON. Doing so may cause product failure or malfunction.
- Use wire that is capable of withstanding heat of 70°C min. to wire the K3HB series.

## ■ Precautions for Correct Use

For detailed information, refer to *Technical Guide for Digital Panel Meters*.

In the interest of product improvement, specifications are subject to change without notice.

## Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Warranty and Limitations of Liability

### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS, OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## Application Considerations

### SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## Disclaimers

### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased product.

### DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

### ERRORS AND OMISSIONS

The information in this catalog has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

### COPYRIGHT AND COPY PERMISSION

This catalog shall not be copied for sales or promotions without permission.

This catalog is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this catalog in any manner, for any other purpose. If copying or transmitting this catalog to another, please copy or transmit it in its entirety.