THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

© 2003, Projects Unlimited Inc.

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.

2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

**SPECIFICATIONS** 

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE RANGE	3 ~ 16	Vdc
RATED CURRENT (MAX)	8	mA
MINIMUM SPL @ 10 cm.	100	dBA
RESONANT FREQUENCY	3,700±500	Hz
TONE OR PULSE RATE	CONTINUOUS	0 PULSE PER SECOND
OPERATING TEMPERATURE	-20 ~ +60	°C
STORAGE TEMPERATURE	-20 ~ +70	°C
HOUSING MATERIAL	ABS777	_
TERMINAL MATERIAL	Sn PLATED COPPER	_
WEIGHT	6	grams

	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
_	RELEASED FROM ENGINEERING	8/19/04	
Α	REMOVED LEAD FREE ADDED RoHS	8/10/05	
В	REVISED TERMINAL MATERIAL	3/21/06	

Dayton , Ohio


SHEET 1 OF

AUDIO INDICATOR

AI-2437-TWT-R

DRAWING NO.

AI-2437-TWT-R

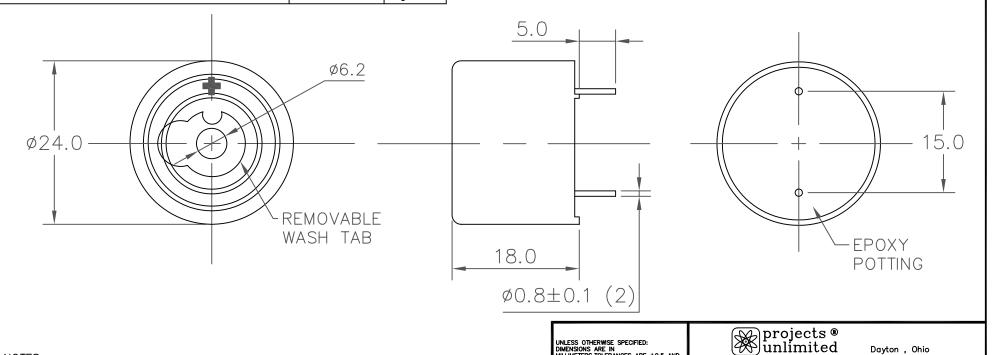

AI-2437-TWT-R.DWG

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3\*.

DO NOT SCALE DRAWING

DATE

8/04

8/04

SIZE

SCALE: N.T.S.

APPROVALS

DRAWN R.A.C

APPROVED R. W.