


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.  
 © 2003, Projects Unlimited Inc.

### SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE (SQUARE WAVE)	3	Vp-p
OPERATING VOLTAGE RANGE	1 ~ 25	Vp-p
RATED CURRENT (MAX)	1	mA
CAPACITANCE	19,000±30%	pF
MINIMUM SPL @ 10 CM	70	dBA
RESONANT FREQUENCY	2,000±500	Hz
OPERATING TEMPERATURE	-40 ~ +125	°C
STORAGE TEMPERATURE	-40 ~ +125	°C
HOUSING MATERIAL	PBT	-
TERMINAL MATERIAL	Sn PLATED PHOSHOR BRONZE	-
WEIGHT	3	grams


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	11/2/04	
A	REMOVED LEAD FREE ADDED RoHS NOTE	8/10/05	

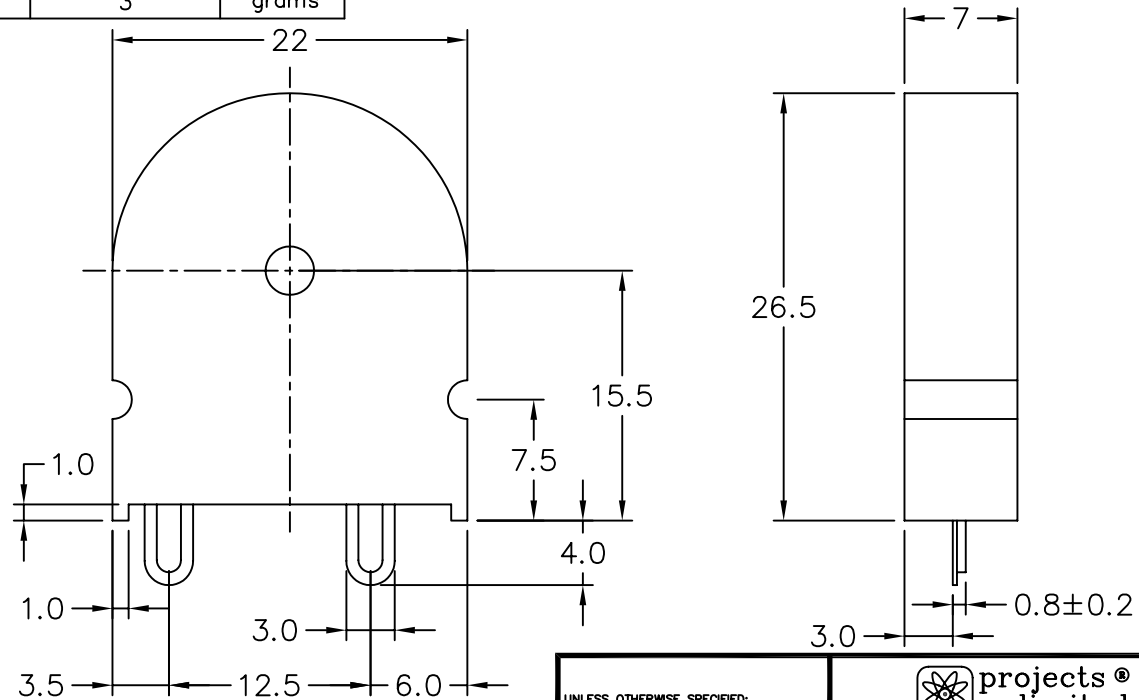

NOTES:

1. THIS PART IS RoHS 2002/95/EC COMPLIANT.
2. ALL DIMENSIONS ARE IN MILLIMETERS.
3. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

FILE NAME  
 AT-2720-ST-R.DWG

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.		 <b>projects® unlimited</b> Dayton, Ohio	
APPROVALS DRAWN <i>R.A.C.</i> 8/04 APPROVED <i>R.W.</i> 11/04		TRANSDUCER(PIEZO) AT-2720-ST-R	
DO NOT SCALE DRAWING		SIZE A	DRAWING NO. AT-2720-ST-R
		SCALE: N.T.S.	SHEET 1 OF 1