


**Specifications:**

|                         |                                    |
|-------------------------|------------------------------------|
| Sound level Category    | Loud Sound Level                   |
| Mode of Operation       | Slow Pulse                         |
| Mounting                | Printed Circuit Board (see note B) |
| Voltage Rating          | 5 to 16 Vdc                        |
| Frequency               | 3900 Hz ±400 Hz                    |
| Loudness (Min. Voltage) | 75 dB(A) min. @ 2 FT and 5 Vdc     |
| Loudness (Max Voltage)  | 86 dB(A) min. @ 2 FT and 16 Vdc    |
| Current Draw            | 3 mA Max @ 5 Vdc                   |
| Current Draw            | 12 mA Max @ 16 Vdc                 |
| Storage Temperature     | -30°C to +80°C                     |
| Operating Temperature   | -20°C to +65°C                     |
| Weight (Typical)        | 3.5 grams                          |
| Housing                 | Valox (UL94V-0), Color Blue        |
| Options                 | For other options contact factory  |

**Dimensions:** Inches (mm)

**RoHS Compliant**

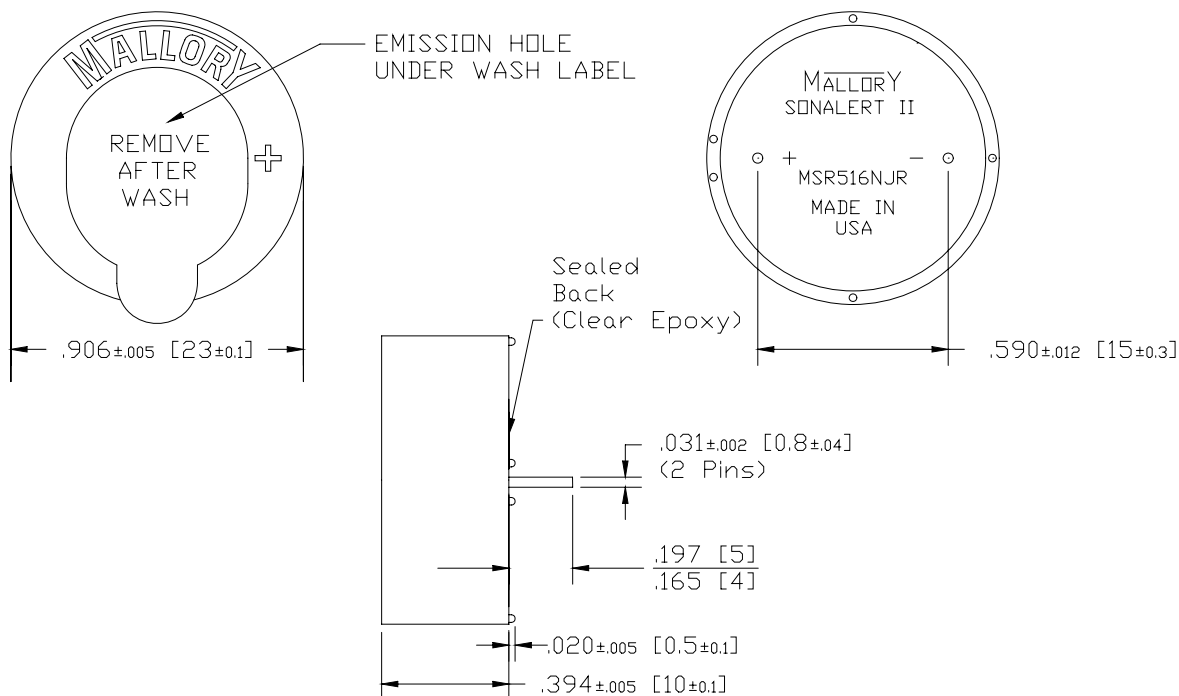

NOTE A:  
TERMINALS - .031" DIA. NICKEL/TIN COATED BRASS.

NOTE B:  
MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER. UNITS ARE SUITABLE FOR WAVE SOLDERING AND AQUEOUS WASH WHEN THE EMISSION HOLE IS COVERED WITH A WASH LABEL. RECOMMENDED MAXIMUM TEMPERATURE AND TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.