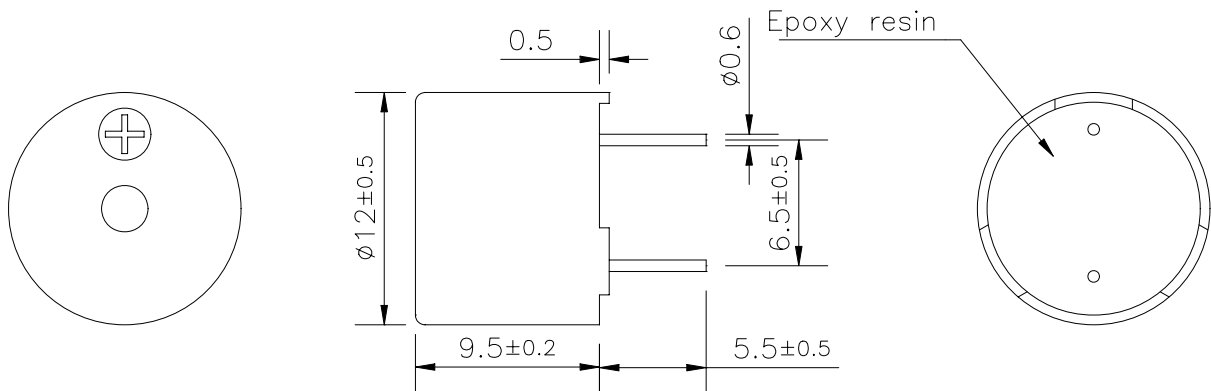
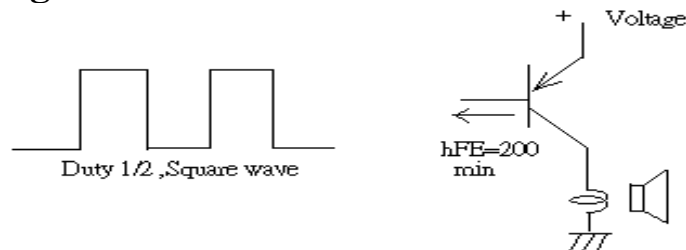


Sales Outline DrawingRevision **A****Specifications:**

Oscillation Frequency (Hz)	2600 ± 200
Operating Voltage (Vp-p)	1.1 ~ 3.0
Rated Voltage (Vp-p)	1.5
Current Consumption Max. (mA)	30 at Rated Voltage
Sound Pressure Level (dB/min)	85 at 10cm at Rated Voltage
Coil Resistance (Ω)	15 ± 3
Operating Temperature (°C)	-30 ~ +70
Storage Temperature (°C)	-40 ~ +80
Lead Pin	Tin Plated Brass
Housing	PPO plastic resin (Color : Black)
Weight (Grams)	1.6
Condition by wave soldering (°C)	245 ± 5 / 3 ± 0.5 sec
Condition by hand soldering (°C)	350 ± 20 / within 5 sec
Options	For other options contact factory

PS: Vp-p = 1/2duty, square wave

RoHS Compliant**Dimensions:** (units: mm)**Recommended Driving Circuit:**

The base current I_b should be high enough so that it saturates the collector current of the transistor with the CB load.