



Electret Condenser Microphone Units

深圳市豪恩电声科技有限公司

Shenzhen Horn Electroacoustic Technology Co., Ltd

SPEC.SHEET NO: W04011404

Address:
Block 9, Shuiwei Ind Zone, Shuiwei New
Village, Dalang, Longhua, Shenzhen,
Guangdong, China 518109

Tel: (86)755-28121370/ 28121371/28109416/28109419
Fax: (86)755-28109417
E-mail: rd@horn.com.cn
Website: www.horn.com.cn

CUSTOMER : Digi-Key Corporation

APPROVAL SHEET

PRODUCT NAME	PART NUMBER	DIMENSION	REMARK
Electret Condenser Microphone	EM6011-46FC10&33	Φ 6.0×1.1(mm)	D.S.PCB

APPROVED BY	CHECKED BY	ISSUED BY

APPROVED BY

DATE:

Address:
Block 9, Shuiwei Ind Zone, Shuiwei New
Village, Dalang, Longhua, Shenzhen,
Guangdong, China 518109


Tel: (86)755-28121370/ 28121371/28109416/28109419
Fax: (86)755-28109417
E-mail: rd@horn.com.cn
Website: www.horn.com.cn

SPECIFICATION

Item	Symbol	Test conditions	Min	Standard	Max	Unit
Sensitivity	S	$f=1\text{KHz}, P_m=1\text{Pa}$	-50	-46	-42	dB <small>(dB=1V/Pa)</small>
Directivity	Omnidirectional					
Impedance	Zout				2.2	K Ω
Input sound Pressure level	S.P.L				100	dB
Operation voltage	Vs	-	1.0	2	10	V
Current consumption	I	$f=1\text{KHz}, P_m=1\text{Pa}$			500	μA
Sensitivity reduction	ΔS	$f=1\text{KHz}, P_m=1\text{Pa}$ $V_s=2 \rightarrow 1.5\text{V}$			-3	dB
S/N ratio	S/N(A)	$f=1\text{KHz}, P_m=1\text{Pa}$ A=curve	58			dB

Measurement Circuit (Test Condition $V_s=2\text{V}$ $R_L=2.2\text{K}\Omega$

$T_a=20^\circ\text{C}$ $R.H=65\%$)

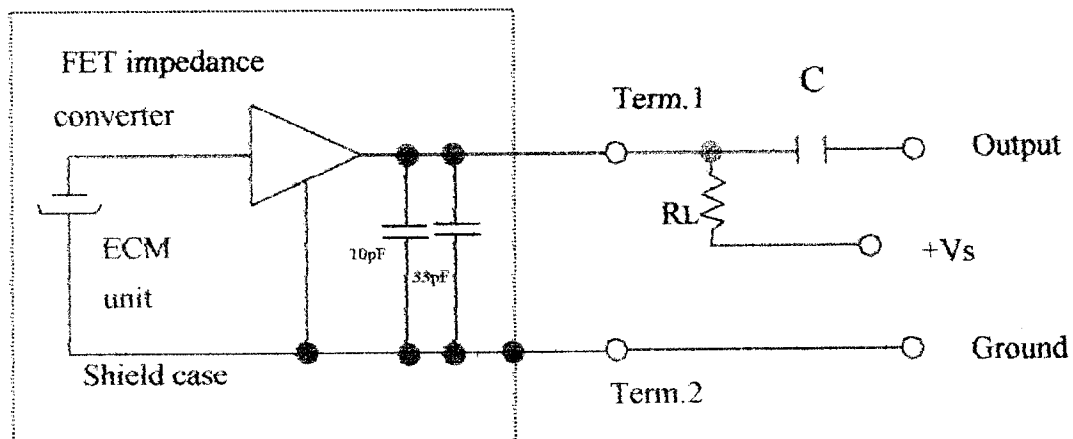


Address:
Block 9, Shuiwei Ind Zone, Shuiwei New
Village, Dalang, Longhua, Shenzhen,
Guangdong, China 518109

Tel: (86)755-28121370/ 28121371/28109416/28109419
Fax: (86)755-28109417
E-mail: rd@horn.com.cn
Website: www.horn.com.cn

Dimensional Drawing


unit: mm

Filter

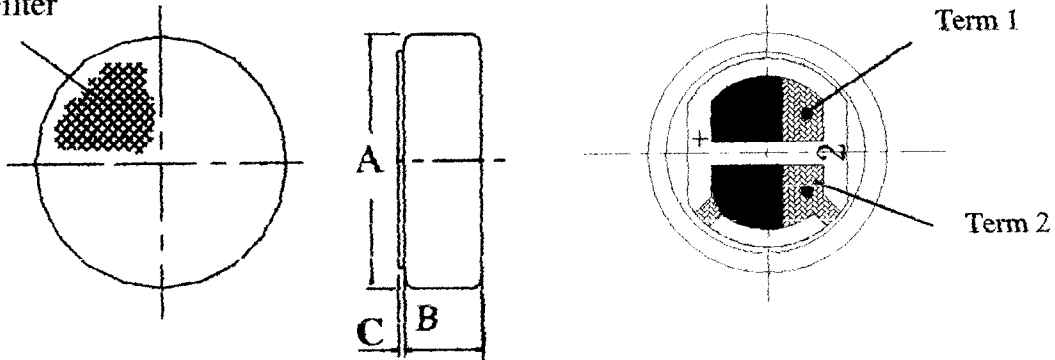

PART	MIN	STANDARD	MAX	REMARK
A	Ø5.8	Ø6.0	Ø6.2	
B	1.0	1.1	1.2	
C	0.1	0.2	0.3	

Typical Frequency Response Curve

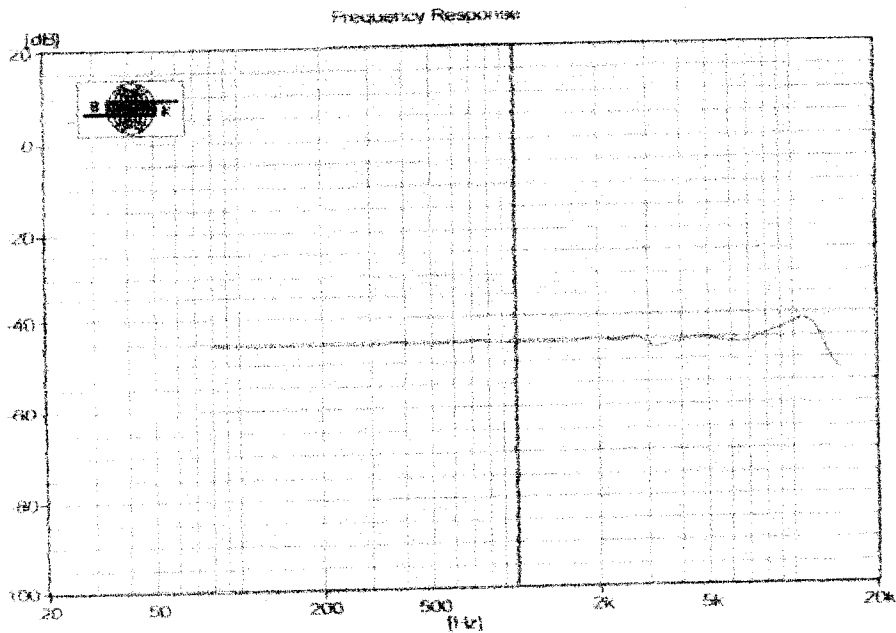



Electret Condenser Microphone Units

深圳市豪恩电声科技有限公司

Shenzhen Horn Electroacoustic Technology Co.,Ltd

SPEC.SHEET NO: W04011404

Address:
Block 9,Shuiwei Ind Zone,Shuiwei New
Village,Dalang,Longhua,Shenzhen,
Guangdong,China 518109

Tel:(86)755-28121370/ 28121371/28109416/28109419
Fax: (86)755-28109417
E-mail: rd@horn.com.cn
Website:www.horn.com.cn

Ambient condition

(1) Operating condition

Ambient temperature: $-10^{\circ}\text{C} \sim +45^{\circ}\text{C}$
Relative humidity: $\leq 85\%$

(2) Storage condition

Ambient temperature: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Relative humidity: $45\% \sim 75\%$

Reliability Test

1) Vibration Test

To be no interference in operation after vibration of full amplitude 2mm for 30 minutes at three axis, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity.

2) Drop Test

To be no interference in operation after dropped to concrete floor each time from 1 meter height of three directions in state of packing, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity.

3)High Temperature Test

To be no interference in operation after high temperature test $70 \pm 3^{\circ}\text{C}$ for 48 hours, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity.

4)Isotherm & Iso-humidity Test

To be no interference in operation after storage test at temperature $60 \pm 2^{\circ}\text{C}$ and relative humidity ($93 \pm 3\%$) for 48 hours, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity. the test is performed at temperature 20°C after operation for 6 hours.

5)Low Temperature Test

To be no interference in operation after high temperature test $-20 \pm 3^{\circ}\text{C}$ for 48 hours, the sensitivity to be within $\pm 3\text{dB}$ from initial sensitivity.


6)Temperature Cycle Test

After exposure at $+55 \pm 2^{\circ}\text{C}$ for 1 hour, at $20 \pm 2^{\circ}\text{C}$ for 1 hour, at $-10 \pm 2^{\circ}\text{C}$ for 1 hour, at $20 \pm 2^{\circ}\text{C}$ for 1 hour, with 5 cycles. Change of sensitivity within $\pm 3\text{dB}$ from initial measuring should be done after 2 hours exposed to $20 \pm 2^{\circ}\text{C}$.

7)Collision Test

After collided with the acceleration $100 \pm 10\text{m/s}$, at the vertical & horizontal directions for 1000 ± 10 times, at the state of packing. Change of sensitivity within $\pm 3\text{dB}$ from initial.

TEST RESULT OF SAMPLES

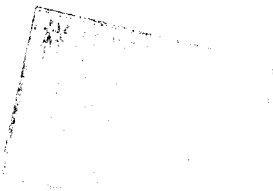NO.	1KHz (dB)	CURRENT (mA)	NOTES
1	-46.4	0.15	(1KHz、0dB=1V/Pa) 
2	-46.5	0.15	
3	-46.5	0.18	
4	-46	0.18	
5	-46	0.2	
6	-46.4	0.2	
7	-46.5	0.2	
8	-46.9	0.18	
9	-47	0.15	
10	-46.3	0.21	
11	-46.9	0.16	
12	-47	0.21	
13	-47	0.2	
14	-47	0.16	
15	-47	0.2	

Customer: **Digi-Key Corporation**

Date: 2004.02.04


Part number: EM6011-46FC10&33

Sensitivity: -46±4dB

Test condition: 2.2K Ω 2V

Tester: G1

SHENZHEN HORN ELECTROACOUSTIC TECHNOLOGY CO., LTD.
X:1.0000kHz *Y:-46.35dB* ZA:Live Curve SSR Fund.

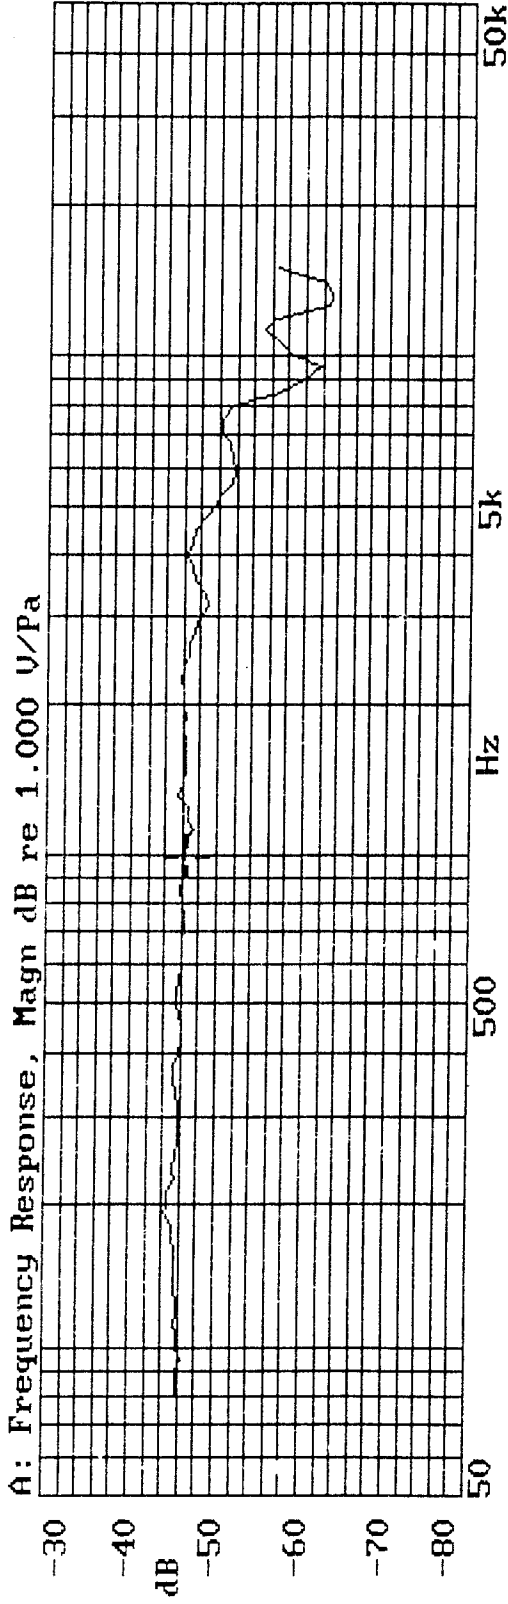

MODEL: EM6011-46FC10&33
CODE: 6#
SENSITIVITY: -46.35dB (1kHz)
TEST CONDITION: 2.2kΩ 2V

03-FEB-2004 16:39:00

Mode: SSR



Certificate of Confirmed Products

Date: Feb. 04. 2004

NO: W040114034

SUPPLIER	HORN	BUYER	Digi-Key Corporation	
TITLE	ECM	MODEL	EM6011-46FC10&33	
SIZE	$\phi 6.0 \times 1.1\text{mm}$	TEST CONDITION	2.2K Ω 2V	
QUANTITY		SAMPLE: 15PCS		
SPECIFICATIONS				
Sensitivity		-46 \pm 4dB (0dB=1V/Pa. 1KHz)		
Directivity		Omnidirectional		
Impedance		Low impedance		
Standard operation voltage		2V		
Operation voltage		1. 0-10V		
Current consumption		Max500uA		
Maximum input S.P.L		100dB		
S/N ratio		More than 58dB		
Sensitive reduction		within-3dB at 1.5V		
The test result from customers		Signature: _____ . 2004		
Final confirmed	Pass	Refuse	Accepted basis on	
Remarks				

***** The form must be confirmed by return fax after your test as your best regards! *****