


# SEM0506AH


## Appearance 外观图

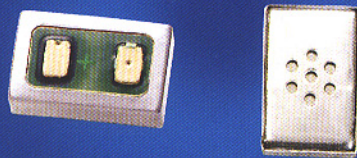

## Dimensional Drawing 轮廓图

Units:mm

### SEM0506AH

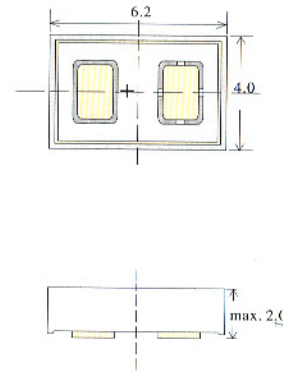


## Sensitivity Range 灵敏度范围

**-32±4dB**

(@1KHz, Vs=2v, Ri=2.2KΩ)


## Typical Frequency Response Curve 频率响应曲线

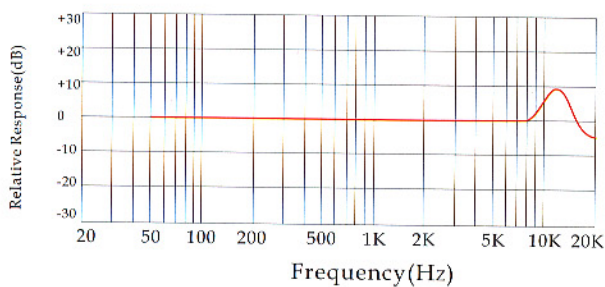

## Specification 规格

<b>Sensitivity:</b>	See above (@1KHz, 0dB=1V/Pa)
<b>Directivity:</b>	Omnidirectional
<b>Impedance:</b>	Low impedance
<b>Current Consumption:</b>	Max. 0.5mA
<b>Standard Operation Voltage:</b>	2.0V(DC)
<b>Sensitivity Reduction:</b>	Within-3dB at 1.5V(DC)
<b>S/N Ratio:</b>	More than 58dB

## Schematic Diagram 测试电路图

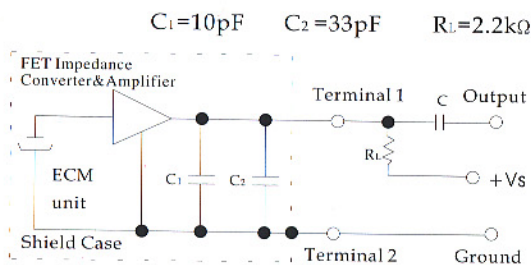

灵敏度:	参照上述: (@1KHz, 0dB=1V/Pa)
方向性:	全向
阻抗:	低阻抗
电流消耗:	最大0.5mA
标准工作电压:	2.0V(DC)
灵敏度减低:	1.5V(DC)时-3dB以内
信噪比:	大于58dB