


2-INPUT 3CHANNEL VIDEO SWITCH


■ GENERAL DESCRIPTION

NJM2284 is a switching IC for switching over from one audio or video input signal to another. Internalizing 2 inputs, 1 output, and then each set of 3 can be operated independently. One of them is a Clamp type" and it can be operated while DC level fixed in position of the video signal. It is a higher efficiency video switch, featuring the operating supply voltage 4.75 to 13.0V, the frequency feature 10MHz, and then the Crosstalk 75dB (at 4.43MHz).


■ PACKAGE OUTLINE



NJM2284D



NJM2284M



NJM2284V

■ FEATURES

- 2 Input-1 Output Internalizing 3 Circuits (one of them is a Clamp type).
- Wide Operating Voltage
- Crosstalk 75dB (at 4.43MHz)
- Wide Bandwidth Frequency Feature 10MHz (2V_{P-P} Input)
- Package Outline DIP-16, DMP-16, SSOP-16


■ RECOMMENDED OPERATING CONDITION

- Supply Voltage V⁺ 4.75 to 13.0V

■ APPLICATIONS

- VCR, Video Camera, AV-TV, Video Disk Player.

■ BLOCK DIAGRAM

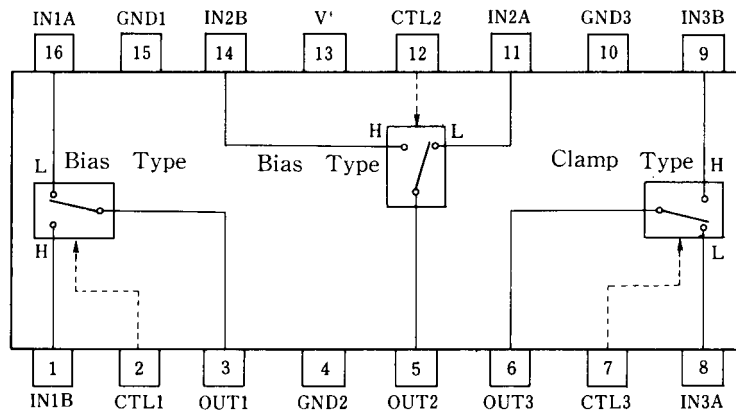

NJM2284D
NJM2284M
NJM2284V

NJM2284

■ MAXIMUM RATINGS

($T_a = 25^\circ\text{C}$)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|-----------|--|------------------|
| Supply Voltage | V^+ | 14 | V |
| Power Dissipation | P_D | (DIP16) 700 (DMP16) 350 (SSOP16) 300 | mW mW mW |
| Operating Temperature Range | T_{opr} | -40 to +85 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -40 to +125 | $^\circ\text{C}$ |

■ ELECTRICAL CHARACTERISTICS

($V^+ = 5\text{V}, T_a = 25^\circ\text{C}$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|----------------------------|-----------|--|------|------|------|------|
| Operating Current (1) | I_{CC1} | $V^+ = 5\text{V}$ (Note1) | 8.1 | 11.6 | 15.1 | mA |
| Operating Current (2) | I_{CC2} | $V^+ = 9\text{V}$ (Note1) | 10.2 | 14.6 | 19.0 | mA |
| Voltage Gain | G_V | $V_I = 100\text{kHz}, 2V_{P,P}, V_O / V_I$ | -0.6 | -0.1 | +0.4 | dB |
| Frequency Gain | G_F | $V_I = 2V_{P,P}, V_O (10\text{MHz}) / V_O (100\text{kHz})$ | -1.0 | 0 | +1.0 | dB |
| Differential Gain | DG | $V_I = 2V_{P,P}$, Standard Staircase Signal | - | 0.3 | - | % |
| Differential Phasa | DP | $V_I = 2V_{P,P}$, Standard Staircase Signal | - | 0.3 | - | deg |
| Output Offset Voltage | V_{OS} | (Note2) | -10 | 0 | +10 | mV |
| Crosstalk | CT | $V_I = 2V_{P,P}, 4.43\text{MHz}, V_O / V_I$ | - | -75 | - | dB |
| Switch Change Over Voltage | V_{CH} | All inside Switch ON | 2.5 | - | - | V |
| Switch Change Over Voltage | V_{CL} | All inside Switch OFF | - | - | 1.0 | V |

(Note1) $S1 = S2 = S3 = S4 = S5 = S6 = S7 = 1$


(Note2) $S1 = S2 = S3 = S4 = S5 = S6 = 1, S7 = 1 \rightarrow 2$ Measure the output DC voltage difference

■ TERMINAL EXPLANATION

| PIN No. | PIN NAME | VOLTAGE | INSIDE EQUIVALENT CIRCUIT |
|---------------------|---|---------|---------------------------|
| 16 1 11 14 | IN 1 A IN 1 B IN 2 A IN 2 B [Input] | 2.5V | |
| 8 9 | IN 3 A IN 3 B [Input] | 1.5V | |
| 2 12 7 | CTL 1 CTL 2 CTL 3 [Switching] | | |
| 3 5 | OUT1 OUT2 | 1.8V | |
| 6 | OUT3 [Output] | 0.8V | |
| 13 | V ⁺ | 5V | |
| 15 4 10 | GND 1 GND 2 GND 3 | | |

NJM2284

TEST CIRCUIT

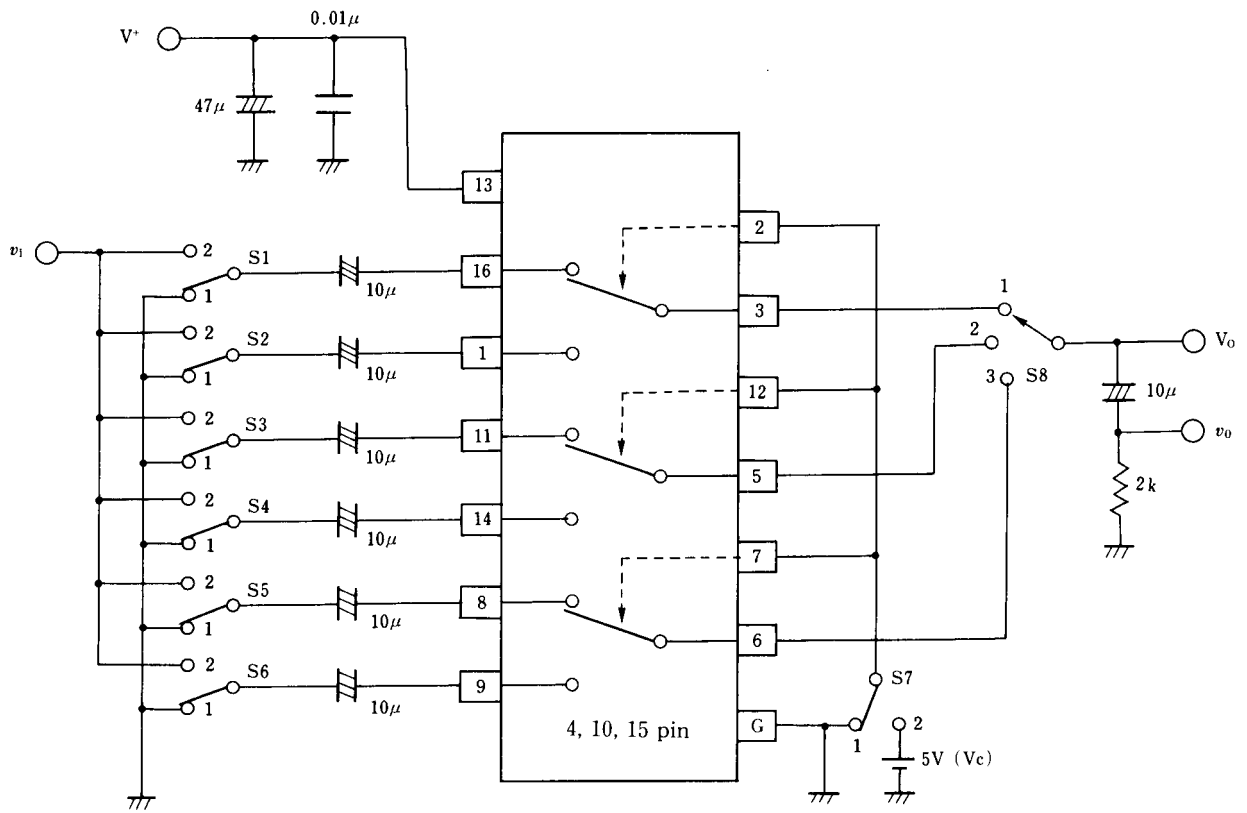


| Parameter | S1 | S2 | S3 | S4 | S5 | S6 | S7 | S8 | Test Part |
|-----------|-----|-----|----|----|----|----|-------|----|-----------|
| I_{CC1} | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | V^+ |
| I_{CC2} | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| G_{v1} | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | v_o |
| G_{F1} | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| DG_1 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| DP_1 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| CT1 | 2 | 1 | 1 | 1 | 1 | 1 | 2 | 1 | v_o |
| CT2 | 1 | 2 | 1 | 1 | 1 | 1 | 1 | 1 | |
| CT3 | 1 | 1 | 2 | 1 | 1 | 1 | 2 | 2 | |
| CT4 | 1 | 1 | 1 | 2 | 1 | 1 | 1 | 2 | |
| CT5 | 1 | 1 | 1 | 1 | 2 | 1 | 2 | 3 | |
| CT6 | 1 | 1 | 1 | 1 | 1 | 2 | 1 | 3 | |
| V_{OS1} | 1 | 1 | 1 | 1 | 1 | 1 | 1/2 | 1 | V_o |
| V_{C1} | 1/2 | 2/1 | 1 | 1 | 1 | 1 | V_c | 1 | V_c |
| THD | 2 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | v_o |

■ TYPICAL CHARACTERISTICS


Operating Current 1 vs. Temperature

($V^+ = 9V$)

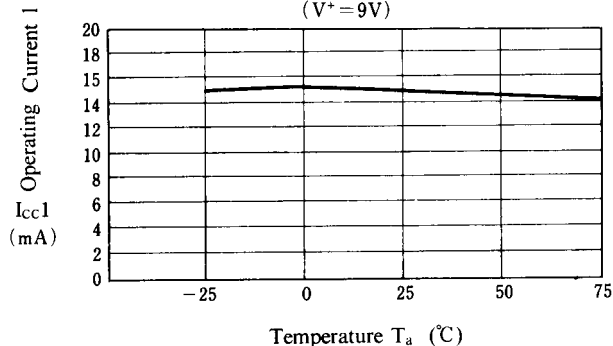


Operating Current 2 vs. Temperature

($V^+ = 5V$)

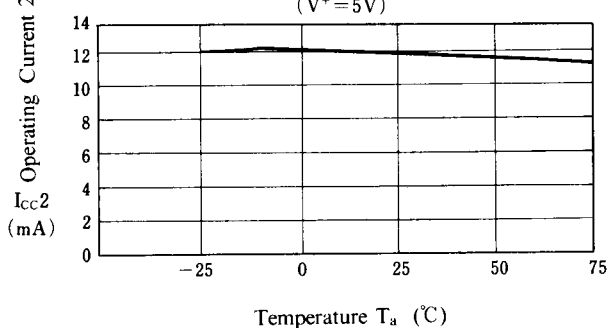


Voltage Gain 1 vs. Temperature

($V^+ = 5V$)

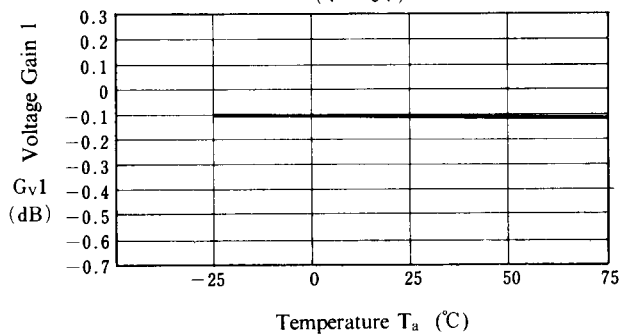


Frequency Gain 1 vs. Temperature

($V^+ = 5V$)

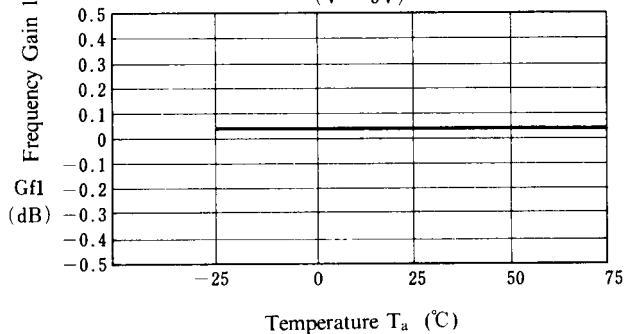


Differential Gain 1 vs. Temperature

($V^+ = 5V$)

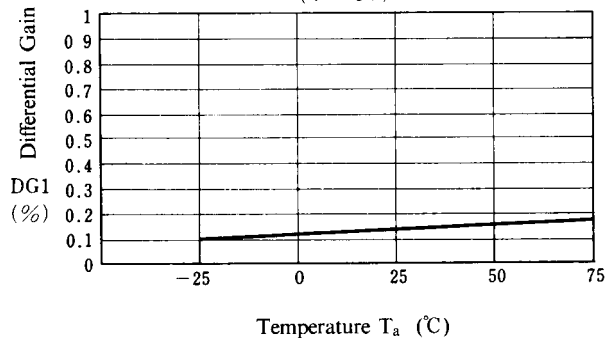

Differential Phase 1 vs. Temperature


($V^+ = 5V$)

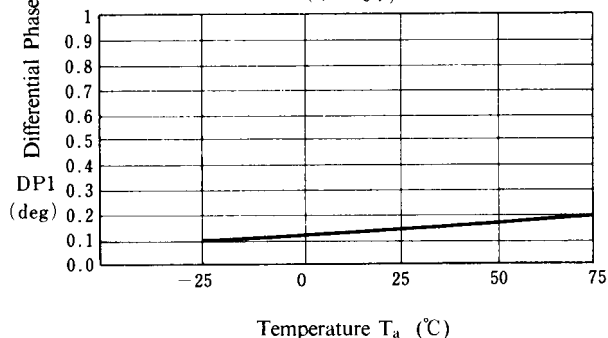

■ TYPICAL CHARACTERISTICS


Offset Voltage 1 vs. Temperature

($V^+ = 5V$)

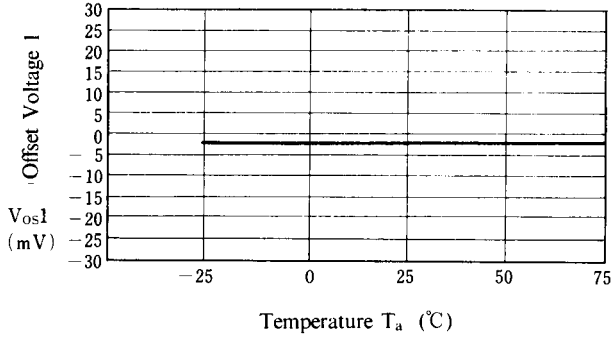


Crosstalk 1 vs. Temperature

($V^+ = 5V$)

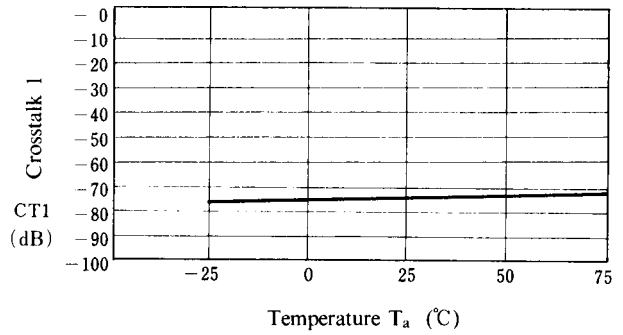


Crosstalk 2 vs. Temperature

($V^+ = 5V$)

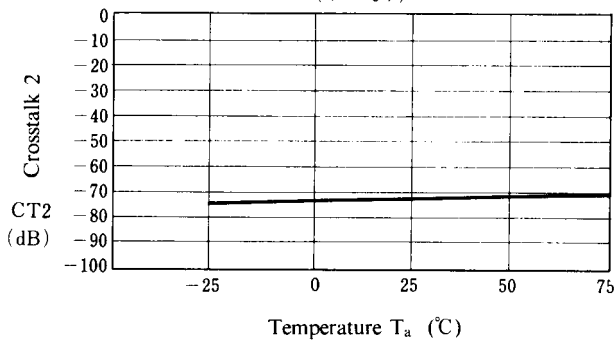


Crosstalk 3 vs. Temperature

($V^+ = 5V$)

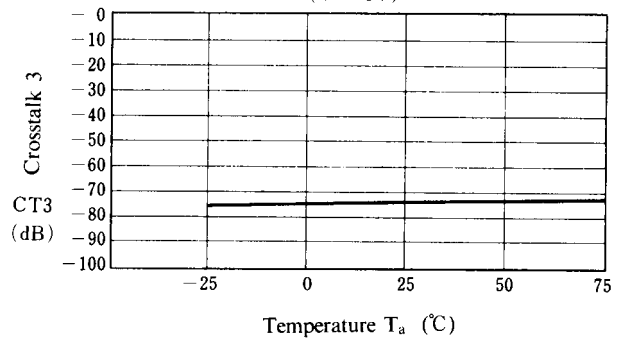


Crosstalk 4 vs. Temperature

($V^+ = 5V$)

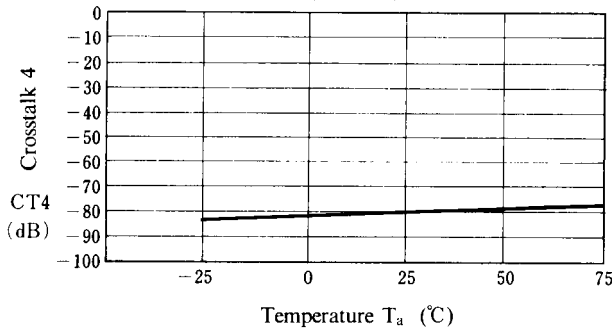


Crosstalk 5 vs. Temperature

($V^+ = 5V$)

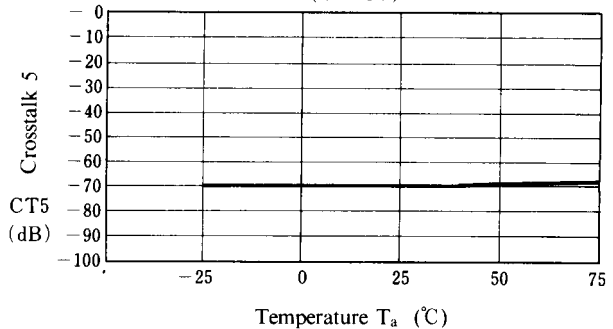


■ TYPICAL CHARACTERISTICS


Crosstalk 6 vs. Temperature

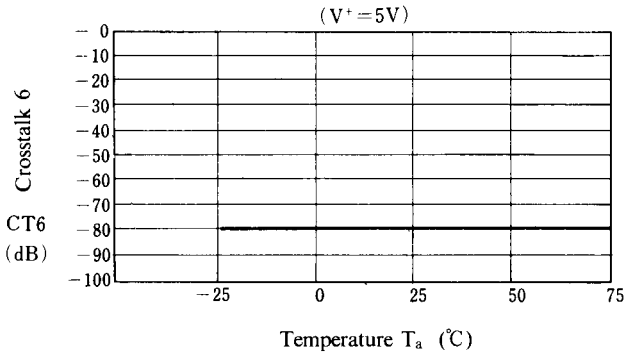


Switch Change Over 1 vs. Temperature

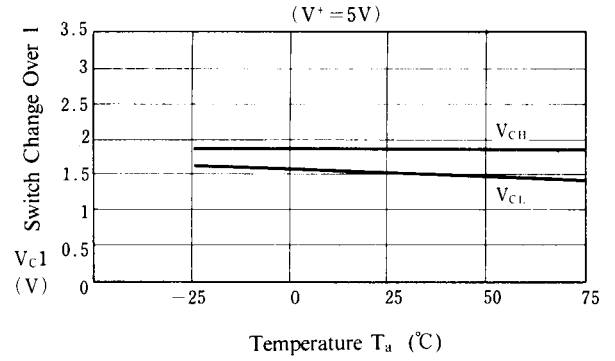


Operating Current vs. Operating Voltage

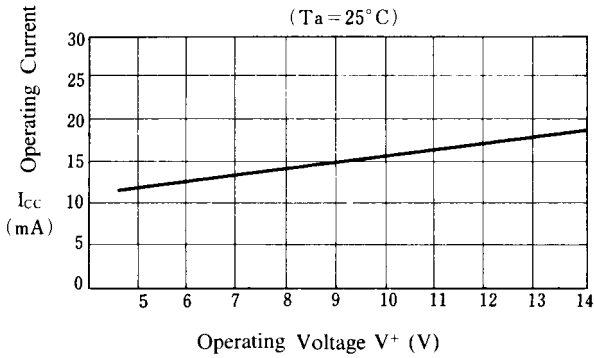


Voltage Gain 1 vs. Operating Voltage

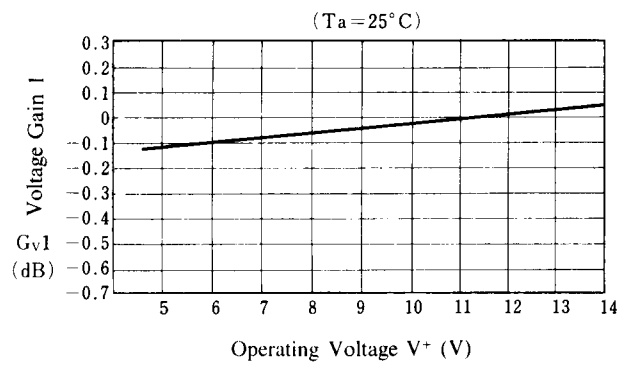

Frequency Gain 1 vs. Operating Voltage

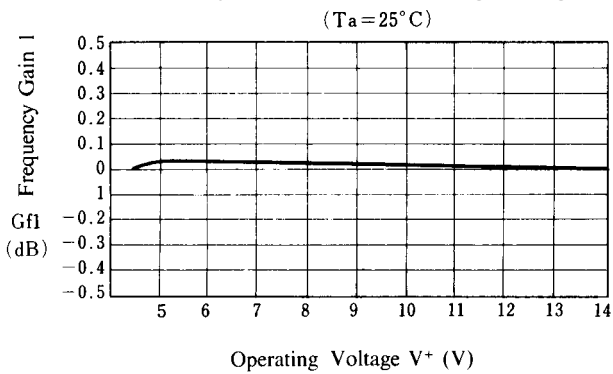


Differential Gain 1 vs. Operating Voltage

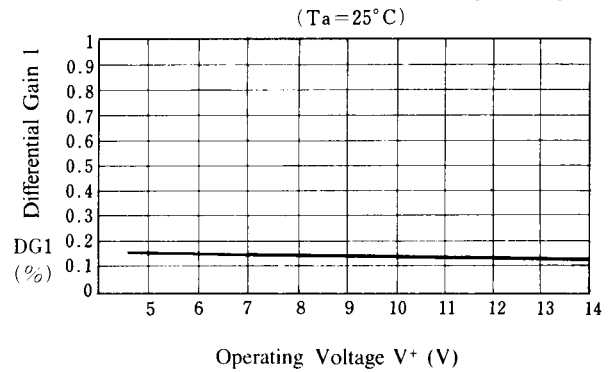


■ TYPICAL CHARACTERISTICS


Differential Phase 1 vs. Operating Voltage
($T_a = 25^\circ\text{C}$)

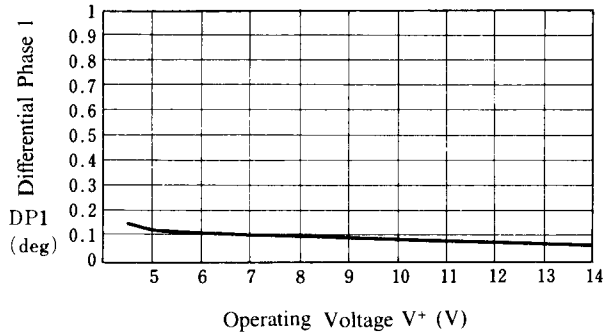


Offset Voltage 1 vs. Operating Voltage
($T_a = 25^\circ\text{C}$)

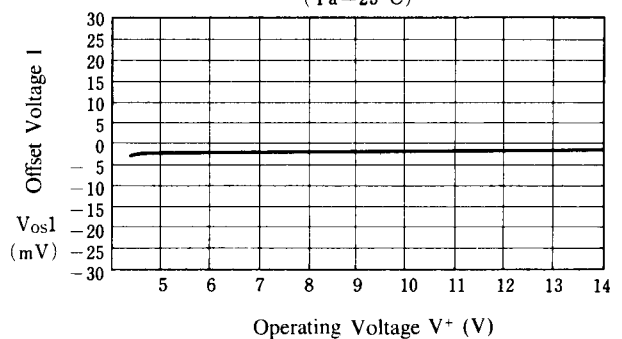


Crosstalk 1 vs. Operating Voltage
($T_a = 25^\circ\text{C}$)

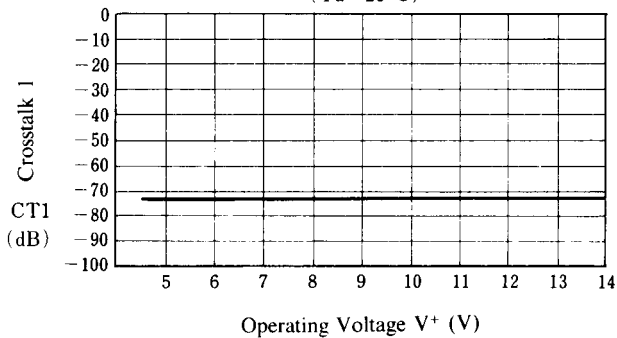


Crosstalk 2 vs. Operating Voltage
($T_a = 25^\circ\text{C}$)

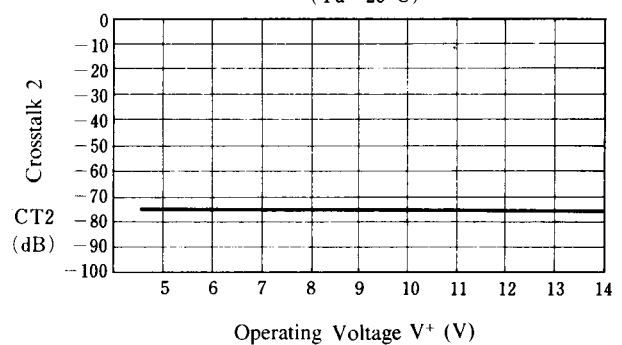

Crosstalk 3 vs. Operating Voltage
($T_a = 25^\circ\text{C}$)

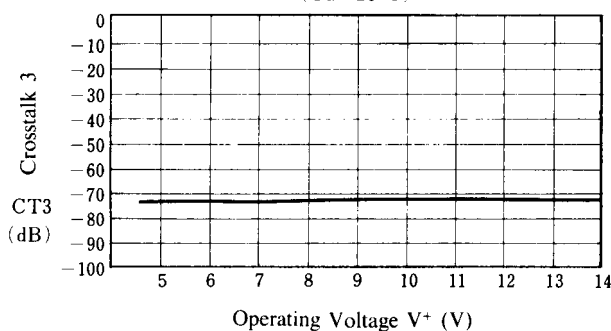


Crosstalk 4 vs. Operating Voltage
($T_a = 25^\circ\text{C}$)

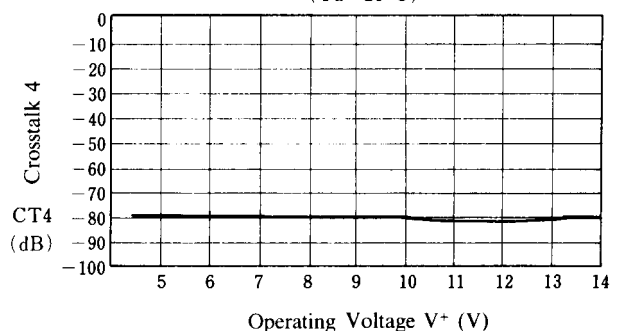

■ TYPICAL CHARACTERISTICS


Crosstalk 5 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

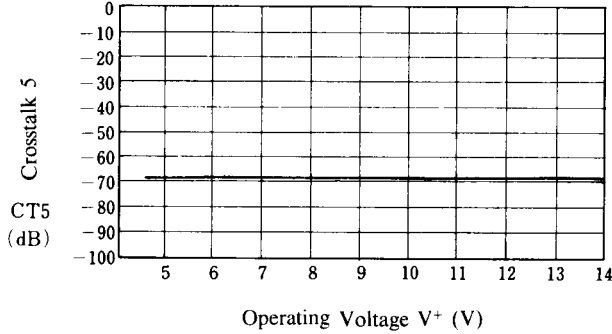


Crosstalk 6 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

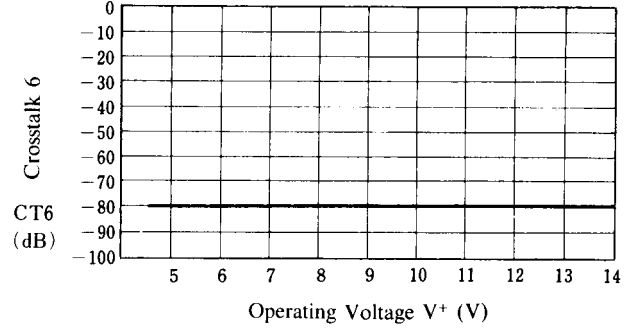


Switch Change Over 1 vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

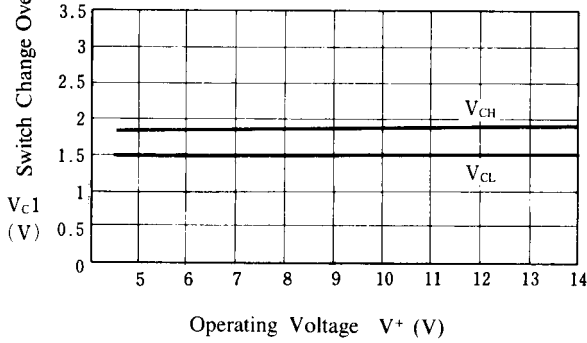


Differential Gain vs. APL

($T_a = 25^\circ\text{C}$)

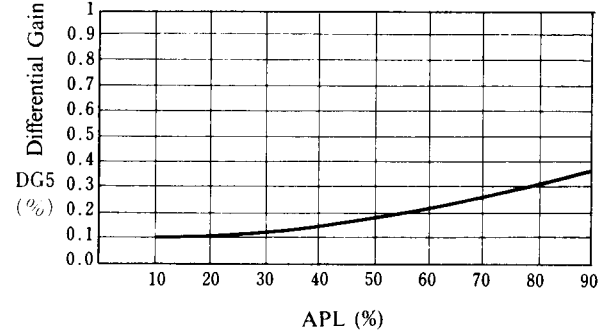


Voltage Gain 1 vs. Frequency Feature

($T_a = 25^\circ\text{C}$)

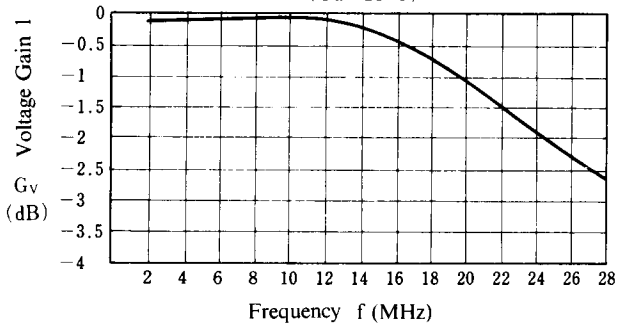


Differential Gain 1 vs. Load Resistor

($T_a = 25^\circ\text{C}$)

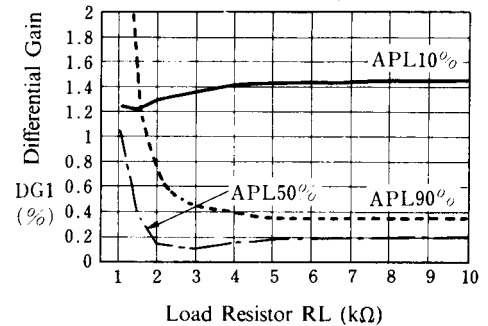


■ TYPICAL CHARACTERISTICS


Differential Gain 5 vs. Load Resistor

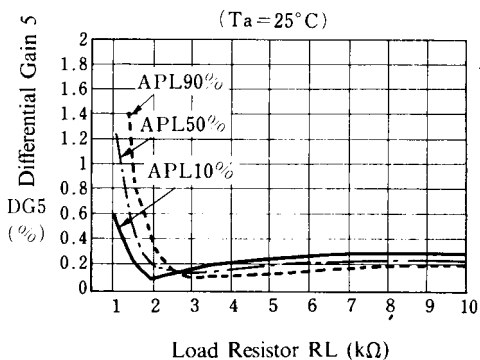


Differential Phase 1 vs. Load Resistor

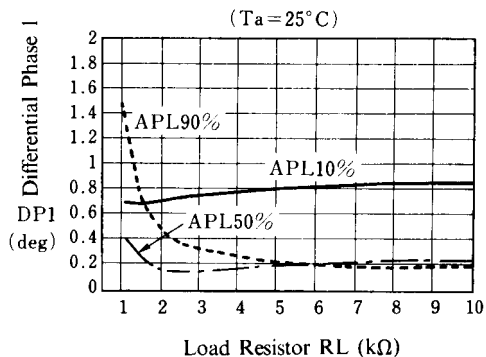


Differential Phase 5 vs. Load Resistor

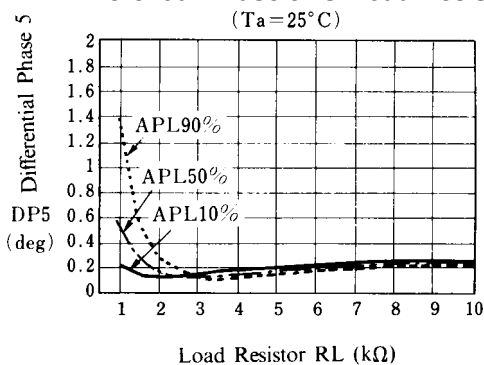


Differential Gain 1 vs. APL

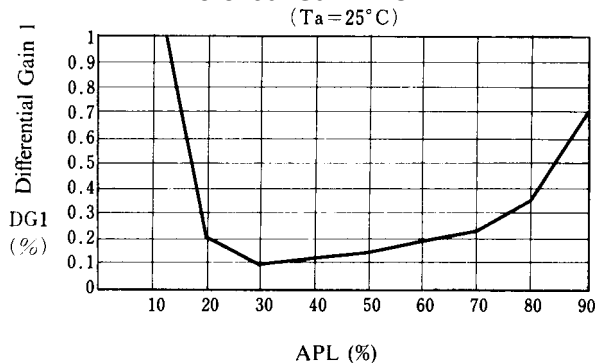

Differential Phase 1 vs. APL

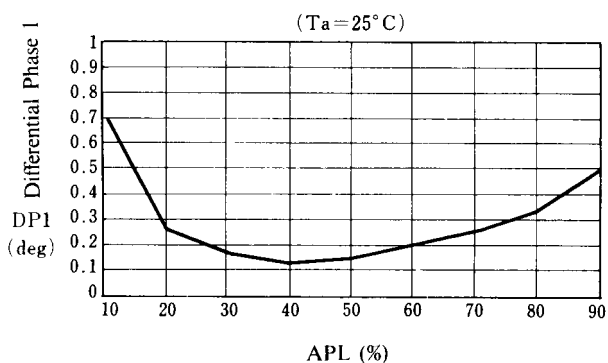


Differential Phase 5 vs. APL

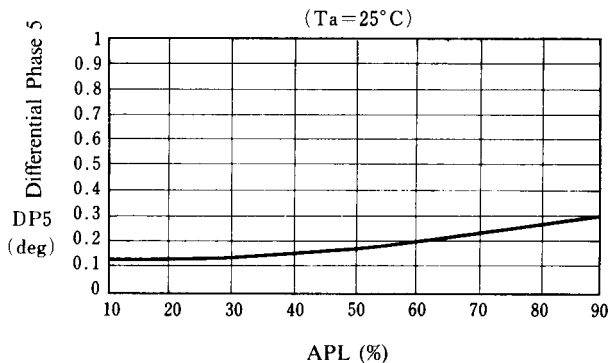

■ TYPICAL CHARACTERISTICS


Total Harmonic Distortion 1 vs. Load Resistor
($T_a = 25^\circ\text{C}$)

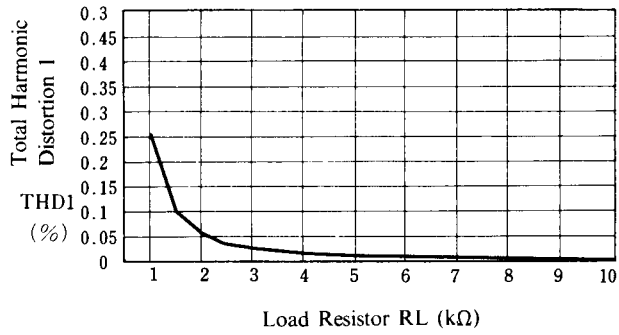


NJM2284

■ APPLICATION


This IC requires $1\text{M}\Omega$ resistance between INPUT and GND pin for clamp type input since the minute current causes an unstable pin voltage.

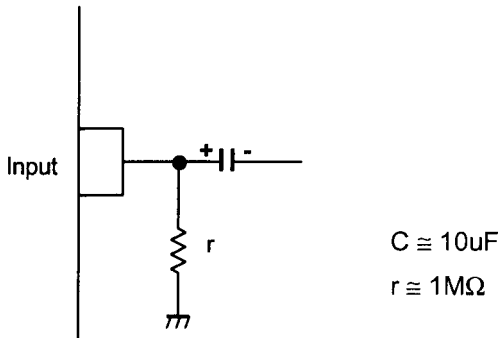

This IC requires $0.1\mu\text{F}$ capacitor between INPUT and GND, $1\text{M}\Omega$ resistance between INPUT and GND for clamp type input at mute mode.

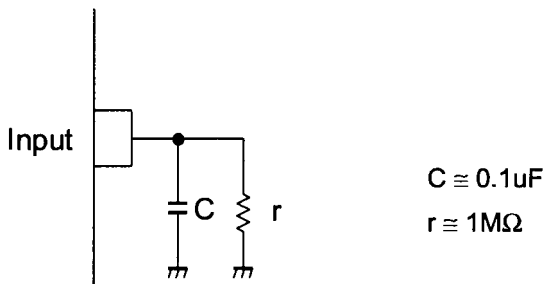

This IC requires $0.1\mu\text{F}$ capacitor between INPUT and GND for bias type input at mute mode.

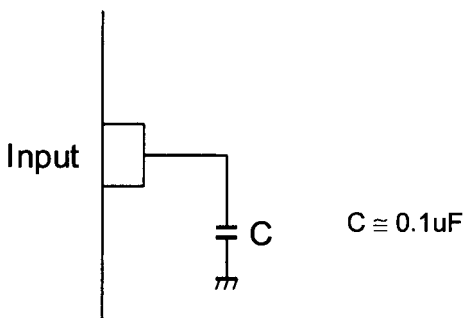

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.