

GP1F565R/GP1F595R

Thin, Low Voltage Operation Type Optical Mini-Jack (Receiver Type)

■ Features

1. Compact
(adoption of small jack for mini plug JIS C6560)
2. Thin type (4.4mm) receiver unit
3. Both optical and electrical signal can be distinguished and received
4. High speed data transmission
Signal transmission speed : MAX. 8Mbps (NRZ signal)
5. Low voltage operation
GP1F565R : 2.7 to 3.6V
GP1F595R : 2.4 to 3.0V
6. Low dissipation current
7. Minimum input optical power level approved by EIAJ standard (CP-1201)

■ Applications

1. MD players
2. Portable CD players

■ Absolute Maximum Ratings (Photoelectric conversion element) (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Supply voltage	V _{CC}	-0.5 to +7.0	V	
Operating temperature	T _{opr}	-20 to +70	°C	
Storage temperature	T _{stg}	-30 to +80	°C	
*1 Soldering temperature	T _{sol}	260	°C	
Output current	I _{OH}	2 (source current)	mA	
		I _{OL}		10 (sink current)
				4 (sink current)

*1 For 5s (2 times or less)

■ Absolute Maximum Ratings(Jack)


Parameter	Symbol	Rating	Unit
Total power dissipation	P _{tot}	D.C. 12V, 1A	-
Operating temperature	T _{opr}	-20 to +70	°C
Storage temperature	T _{stg}	-30 to +80	°C
*1 Soldering temperature	T _{sol}	260	°C
*2 Isolation voltage	Viso	A.C. 500V rms	-

*1 For 5s (2 times or less)

*2 For 1min

■ Outline Dimensions

(Unit : mm)

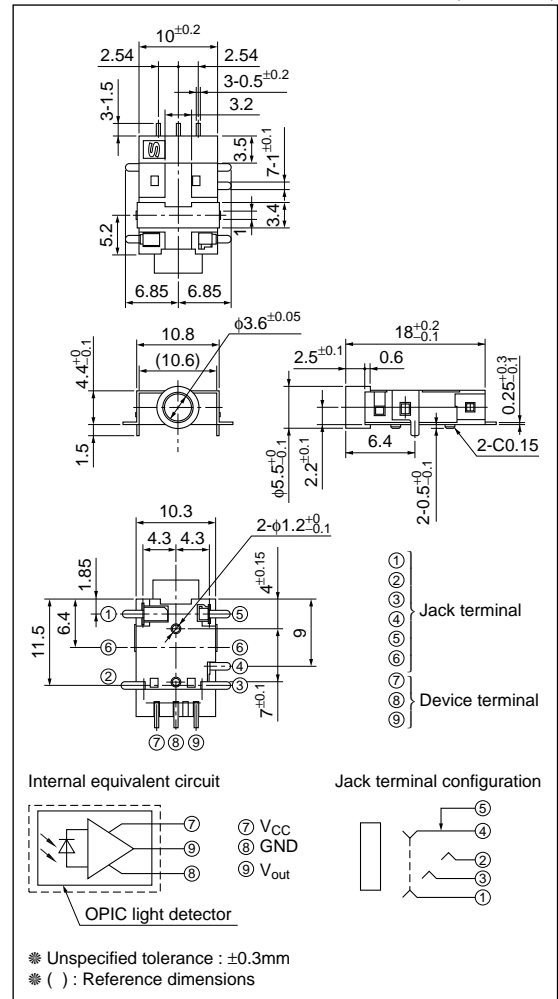

* "OPIC" (Optical IC) is a trademark of the SHARP Corporation.
An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a signal chip.

■ Recommended Operating Conditions

Parameter		Symbol	MIN.	TYP.	MAX.	Unit
Operating supply voltage	GP1F565R	V _{CC}	2.7	3.0	3.6	V
	GP1F595R		2.4	2.5	3.0	
Operating transfer rate		T	0.1	—	8	Mbps
Receiver input optical power level		P _c	-24.0	—	-14.5	dBm

■ Electro-optical Characteristics

(T_a=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Peak sensitivity wavelength		λ _p	—————	—	700	—	nm
Dissipation current	GP1F565R	I _{cc}	Refer to Fig.1	—	12	15	mA
	GP1F595R				5.0	7.5	
High level output voltage	GP1F565R	V _{OH}	Refer to Fig.2	2.1	—	—	V
	GP1F595R			2.0	2.2		
Low level output voltage	GP1F565R	V _{OL}	Refer to Fig.2	—	—	0.4	V
	GP1F595R				0.2	0.5	
Rise time		t _r	Refer to Fig.2	—	17	—	ns
Fall time		t _f	Refer to Fig.2	—	5	—	ns
Low → High delay time		t _{pLH}	Refer to Fig.2	—	—	180	ns
High → Low delay time		t _{pHL}	Refer to Fig.2	—	—	180	ns
Pulse width distortion		Δt _w	Refer to Fig.2	-30	—	+30	ns
Jitter	Δt _j	Refer to Fig.3, P _c = -14.5dBm		—	1	30	ns
		Refer to Fig.3, P _c = -24dBm		—	—	30	ns

■ Mechanical and Electrical Characteristics(Jack)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Insertion force, withdrawal force	F _p	*3	5	—	35	N
Contact resistance	R _{con}	*4	—	—	30	mΩ
Isolation resistance	R _{iso}	D.C. 500V, 1min.	100	—	—	MΩ

Note) This jack is designed for applicable to φ3.5 compact single head plug (JIS C6560).

*3 Measuring method of insertion force and withdrawal force.

Insertion and withdrawal force shall be measured after inserting and withdrawing 3 times by using JIS C6560 standard plug for test.

*4 Measuring method of contact resistance.

It measures at 100mA or less and 1000Hz at the condition of inserting JIS C6560 standard plug for test in which movable contact terminal and make contacts are described.

Fig.1 Dissipation Current

Input conditions		Measuring method
Supply voltage	GP1F565R	$V_{CC}=3.0\pm 0.05V$
	GP1F595R	$V_{CC}=2.5\pm 0.05V$
Optical output coupling with fiber		$P_c=-14.5dBm$
Standard transmitter input signal		6Mbps NRZ, Duty 50% or 3Mbps biphasic mark PRBS signal


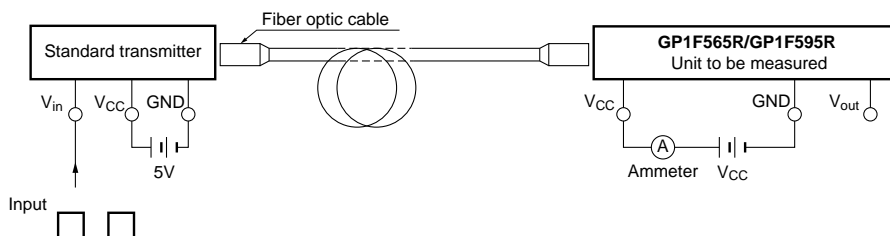


Fig.2 Measuring Method of Output Voltage and Pulse Response

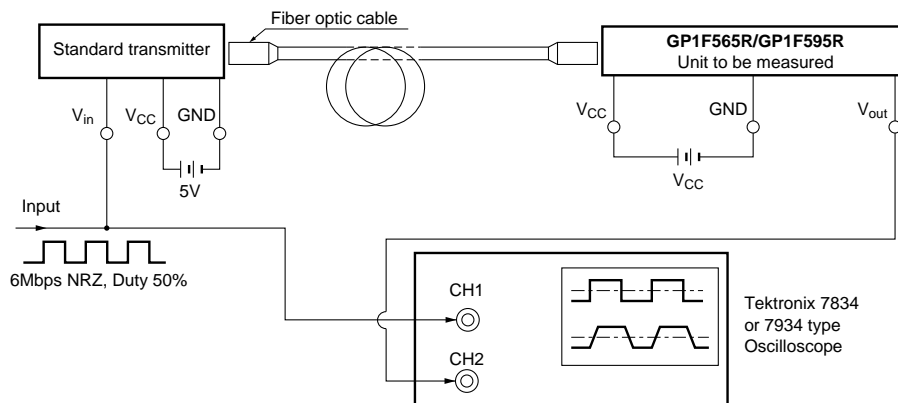

Test item

Test item	Symbol
Low \rightarrow High pulse delay time	t_{PLH}
High \rightarrow Low pulse delay time	t_{PHL}
Rise time	t_r
Fall time	t_f
Pulse width distortion $\Delta t_w = t_{PHL} - t_{PLH}$	Δt_w
High level output voltage	V_{OH}
Low level output voltage	V_{OL}

Notes (1) **GP1F565R** $V_{CC}=3.0\pm 0.05V$ (State of operating)

GP1F595R $V_{CC}=2.5\pm 0.05V$ (State of operating)

(2) The fiber coupling light output set at $-14.5dBm/-24.0dBm$.

(3) The probe for the oscilloscope must be more than $1M\Omega$ and less than $10pF$.

(4) The output (H/L level) of **GP1F565R/GP1F595R** are not fixed constantly when it receives the modulating light (including DC light, no input light) less than $0.1Mbps$.


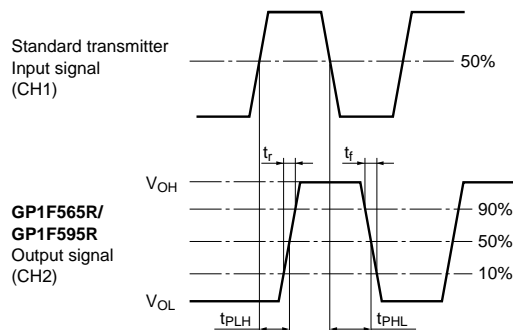



Fig.3 Measuring Method of Jitter

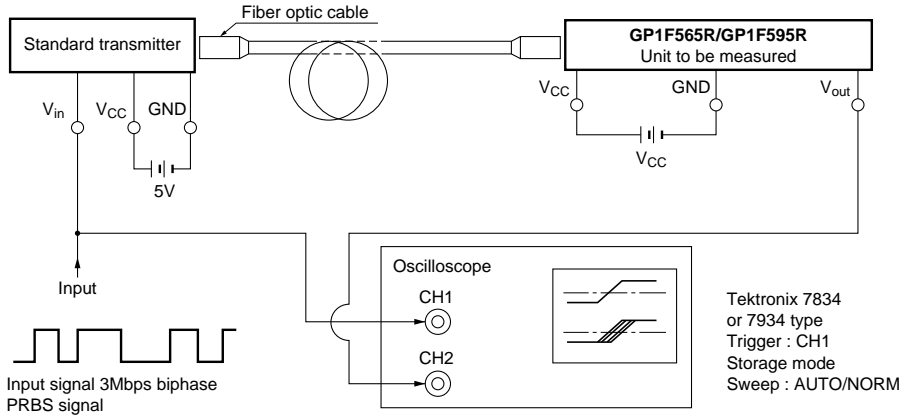

Test item

Test item	Symbol	Test condition
Jitter	Δt_j	Set the trigger on the rise of input signal to measure the jitter of the rise of output
Jitter	Δt_j	Set the trigger on the fall of input signal to measure the jitter of the fall of output

- Notes (1) The fiber coupling light output set at $-14.5\text{dBm}/-24.0\text{dBm}$.
 (2) The waveform write time shall be 3 seconds. But do not allow the waveform to be distorted by increasing the brightness too much.
 (3) **GP1F565R** $V_{CC}=3.0\pm 0.05\text{V}$ (State of operating)
GP1F595R $V_{CC}=2.5\pm 0.05\text{V}$ (State of operating)
 (4) The probe for the oscilloscope must be more than $1\text{M}\Omega$ and less than 10pF .

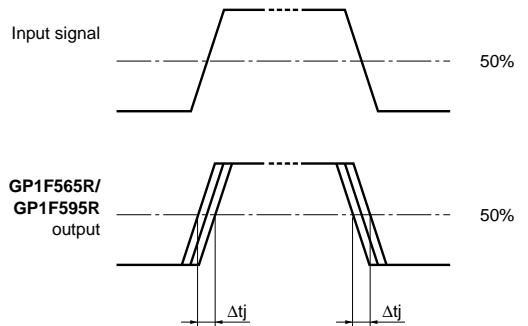

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.