




## Specifications

Dimensions	ø16.0 x 2.55 mm		
Impedance	8 Ohm ± 15%	at	1.0 KHz 1 V
Resonant frequency	600 Hz ± 20%	at	1 V
Sound pressure level	82 dB/w ± 3 dB	0.3 w 10 cm at 1.0K, 1.2K, 1.5K, 2.0K Hz	
	69 dB/w ± 3 dB	1 w 1m at 1.0K, 1.2K, 1.5K, 2.0K Hz	
Response	Fo Hz ~ 20 KHz max.		
Distortion	10% max.	at 1.0 KHz 0.3W	
Input power	Nominal 0.3 W	Handling capacity	0.5 W
Operation	must be normal at program source 0.3 W		
Buzz, rattle, etc.	must be normal at sine wave 1.55 V		
Magnet	Nd-Fe-B		
Operating temp.	-20 ~ +55°C		
Weight	1.5 g		
Material	Metal		
RoHS	yes		

## Mechanical Drawing

Tolerance: ±0.5

□	□	□	□
Week	Year		
01	05---2005		
02	06---2006		
.	.		

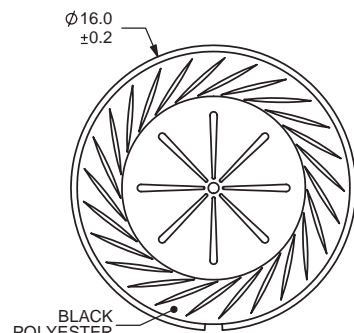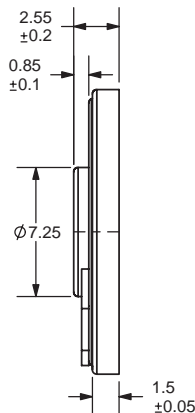
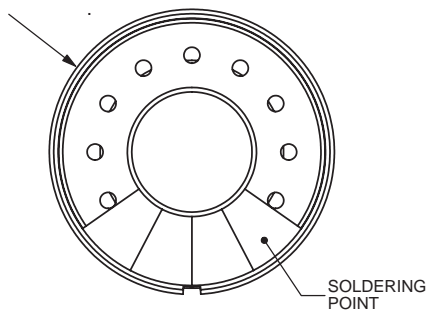



The mylar won't exceed the metal frame when input 0.3W





Frequency Response Curve

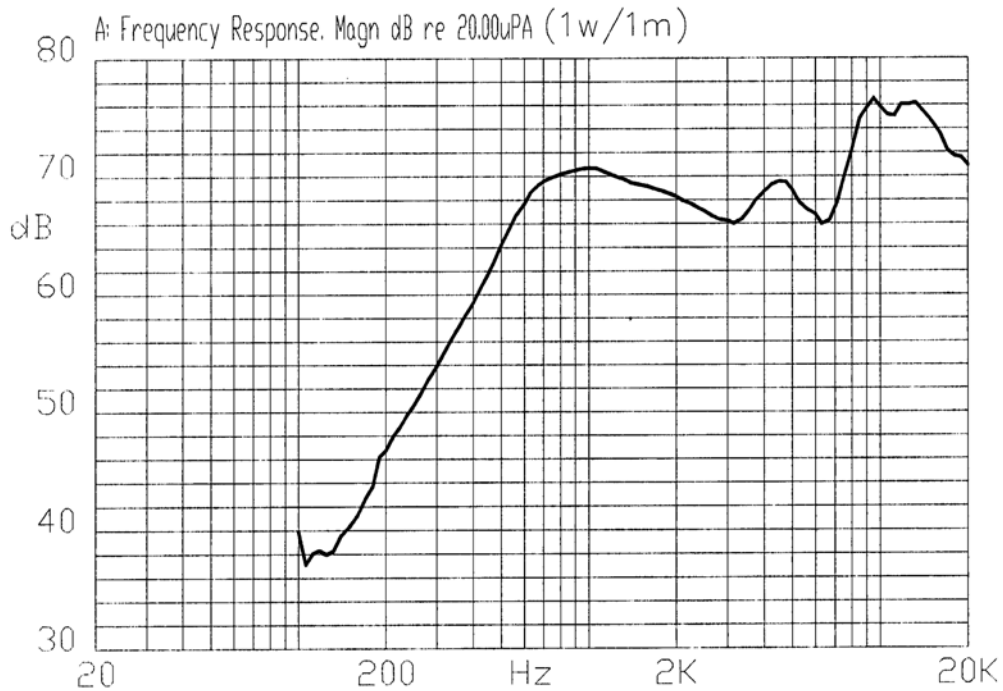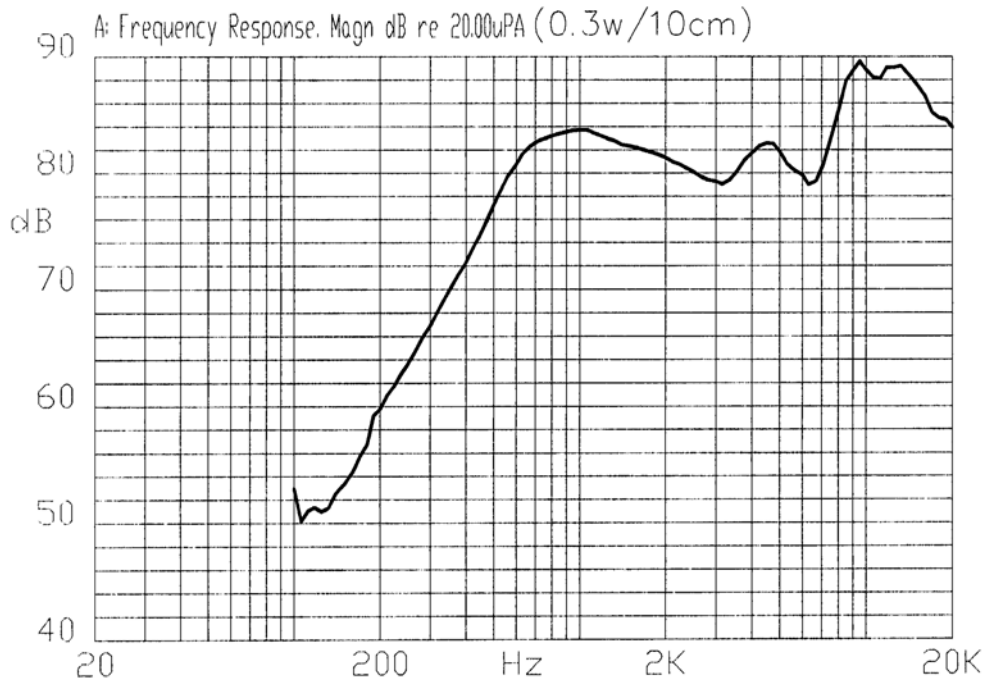


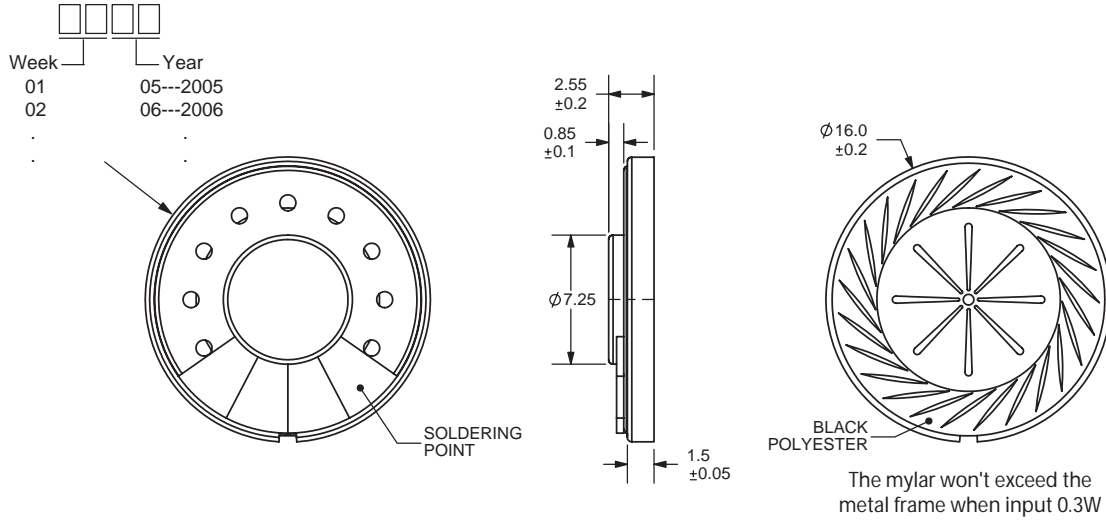**Measurement Circuit**


### Mechanical Characteristics

Item	Test Condition	Evaluation Standard
PCB Wire Pull Strength	The pull force should be applied to double lead wire: Horizontal 3.0N (0.306kg) for 30 seconds	No damage or cutting off.
Vibration	The speaker should be measured after applying a vibration amplitude of 1.5 mm with 10 to 55 Hz band of vibration frequency to each of the 3 perpendicular directions for 2 hours.	No obstacle will be harmful to normal operation; damage, cracks, rust, and distortions.
Drop Test	The part will be dropped, contained inside a normal box, from a height of 75 cm onto a 40 mm thick wooden board 10 times.	Should not be audible at 1.55 V sine wave between Fo ~ 20 KHz.

### Environment Test

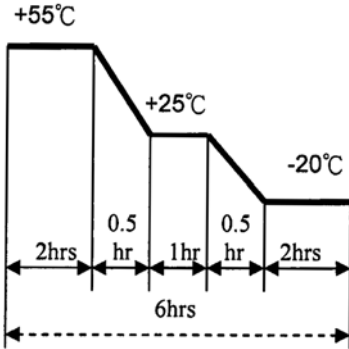Item	Test Condition	Evaluation Standard
High temp. test	After being placed in a chamber at 55°C for 96 hours.	The speaker will be measured after being placed at +25°C for 6 hours. No obstacle will be harmful to normal operation; damage, cracks, rust, and distortions. Should not be audible at 1.55 V sine wave between Fo ~ 20 KHz. The SPL should be within ±3dB compared to the initial measurements.
Low temp. test	After being placed in a chamber at -20°C for 96 hours.	
Humidity test	After being placed in a chamber at +40°C and 90% relative humidity for 96 hours.	
Temp. cycle test	The part shall be subjected to 5 cycles. One cycle will consist of:  	



Part No: CDMG16008-03

Date: 10/18/2006

Unit: mm

Description: micro dynamic speaker

Page No: 5 of 6

## Reliability Test

Item	Test Condition	Evaluation Standard
Load Test	0.3 W white noise, applied for 24 hours, at room temperature.	The speaker will be measured after being placed at +25°C for 6 hours. No obstacle will be harmful to normal operation; damage, cracks, rust, and distortions. Should not be audible at 1.55 V sine wave between Fo ~ 20 KHz. The SPL should be within ±3dB compared to the initial measurements.

## Test Conditions

Standard Test Condition	a) Temperature: +5 ~ +35°C	b) Humidity: 45 - 85%	c) Pressure: 860-1060 mbar
Judgement Test Condition	a) Temperature: +25 ±2°C	b) Humidity: 60 - 70%	c) Pressure: 860-1060 mbar

## Recommended Temperature Profile for Hand Soldering

Hand Soldering
370±10°C / 3±1 Sec



**CUI INC**

Part No: CDMG16008-03


Description: micro dynamic speaker

Date: 10/18/2006

Unit: mm

Page No: 6 of 6

### Packaging

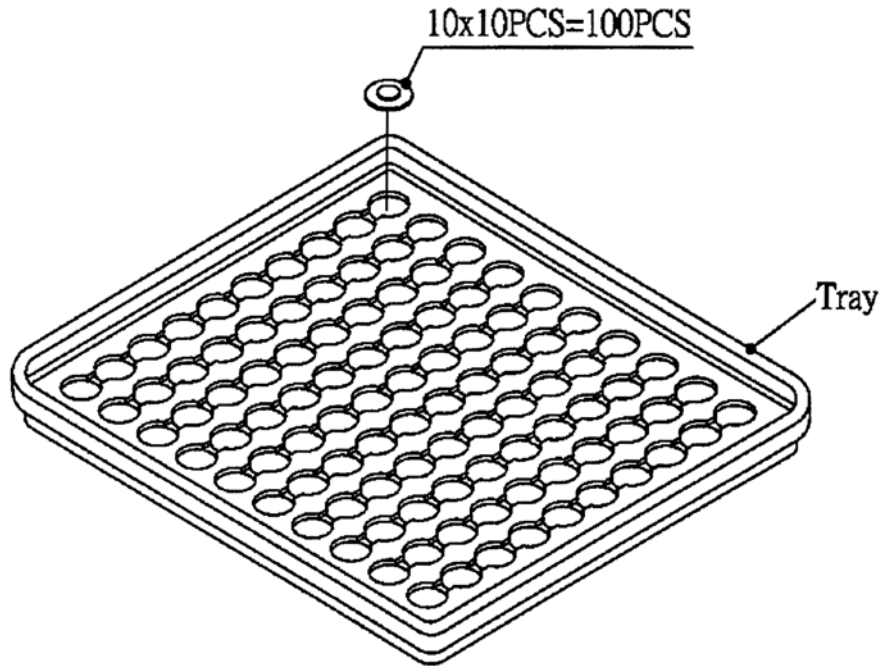

Tray	216mmx196mmx20.4mm	1x100PCS=100PCS
------	--------------------	-----------------