


**ENERGIZER E96**

**AAAA**



**Industry Standard Dimensions**

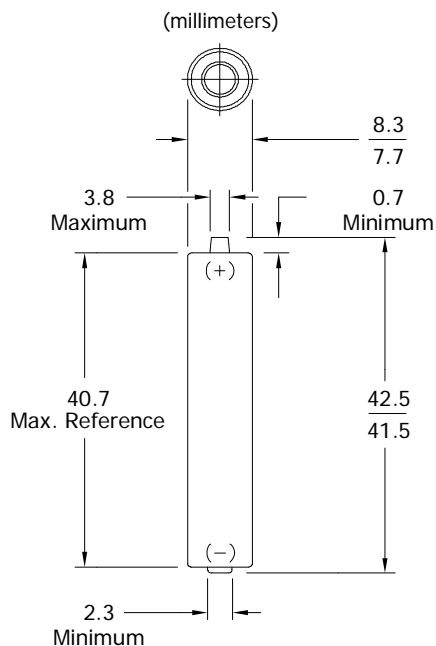


<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	ANSI-25A, IEC-LR8D425
<b>Nominal Voltage:</b>	1.5 volts
<b>Nominal IR:</b>	150 to 300 milliohms (fresh)*
<b>Operating Temp:</b>	-18°C to 55°C
<b>Typical Weight:</b>	6.5 grams
<b>Typical Volume:</b>	2.2 cubic centimeters
<b>Jacket:</b>	Plastic Label
<b>Shelf Life:</b>	5 years at 21°C (80% of initial capacity)
<b>Terminal:</b>	Flat Contact


\* For additional information, please reference the [IR technical white paper](#).

**Milliamp-Hours Capacity**


Continuous discharge to 4.8 volts at 21°C

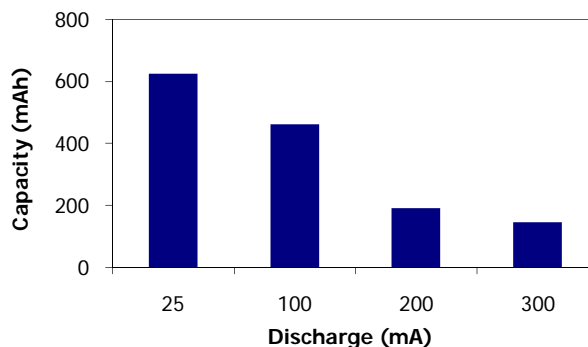

**Industry Standard Testing (21°C):**

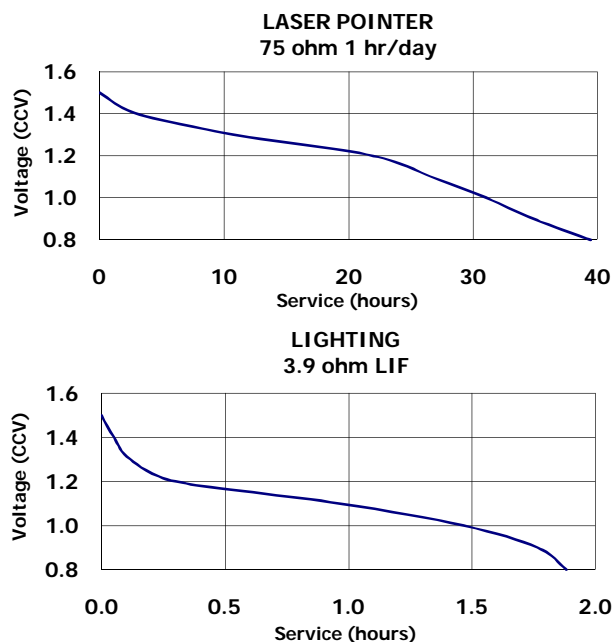

**Battery Selection Indicator**

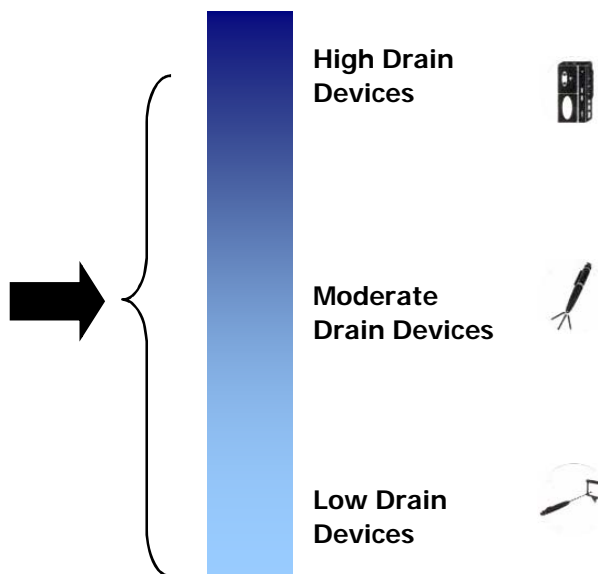

**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.