

# dsPIC30F Speech Recognition Library

## Summary

The dsPIC30F Speech Recognition Library provides voice control of embedded applications that require an alternative user interface. With a vocabulary of up to 100 words, the Speech Recognition Library allows users to control their application vocally. The Speech Recognition Library is an ideal front end for hands-free products such as modern appliances, security panels and cellphones. The Speech Recognition Library has very modest memory and processing requirements and is targeted for the dsPIC30F5011, dsPIC30F5013, dsPIC30F6012 and dsPIC30F6014 processors.


## Description

The Speech Recognition Library provides isolated, speaker-independent word recognition of US English. It allows a user to control an application through a set of fixed, voice commands. The library has already been pre-trained by a demographic cross-section of male and female US English speakers. Conveniently, no training is required for end-users of the product.

The library samples speech data from a voice codec connected to the dsPIC30F's Data Converter Interface. The data is processed a frame at a time, and when a word ending is detected, the received word is identified using Hidden Markov Model processing. After the library identifies the word, your application may then take some pre-defined action.

The Speech Recognition algorithm is written in assembly language to optimize performance and minimize RAM usage. A well defined API makes it easy to integrate the Speech Recognition Library with your application. Library functions let your application easily disable and enable speech recognition. The library lets your other system processing operations take place without disrupting speech recognition.

A PC-based Word Library Builder program allows you to build a custom library from a Master Library of 100 common words. A noise profile is selected that suits your operating environment. The noise profile consists of a noise type and a signal-to-noise ratio (SNR). The noise type can be any combination of 3 different noise sources (automobile, office and white noise), and the SNR may be as low as 15 dB. The Word Library Builder program generates source files that you then use to build your application. These files contain data tables that the library uses to perform speech recognition.

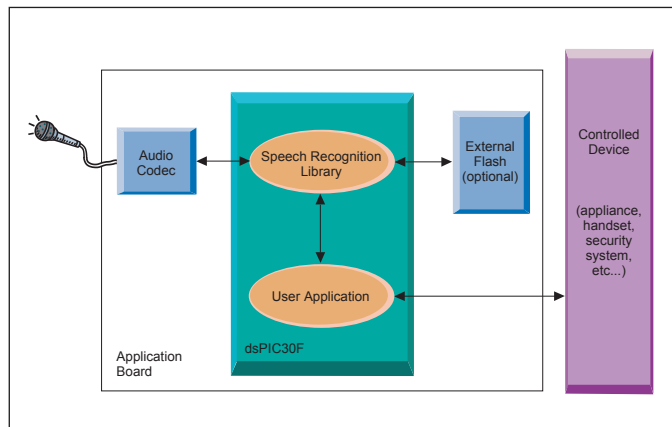

## Features

Key features of the dsPIC Speech Recognition Library include:

- US English language support
- Speaker-independent recognition of isolated words
- No speaker training is required
- Hidden-Markov Model based recognition system
- Recognition time < 500 msec
- Master Library of 100 common words (available in *dsPIC30F Speech Recognition Library User's Guide*)
- Windows® based utility allows you create a custom library from the master library
- Additional words can be added to the master library (fee based)
- Data tables can be stored in external memory
- Optional Keyword Activation and Silence Detection
- Optional system self-test using a predefined keyword
- Flexible API
- Full compliance with Microchip MPLAB® C30 Language Tools
- *dsPIC30F Speech Recognition Library User's Guide*
- Designed to run on dsPICDEM™ 1.1 General Purpose Development Board (DM300014)

## Devices Supported

- dsPIC30F5011
- dsPIC30F5013
- dsPIC30F6012
- dsPIC30F6014

## Resource Requirements

Sampling Interface: Si-3000 Audio Codec operating at 12.0 kHz  
System Operating Frequency: 12.288, 18.432 or 24.576 MHz  
Computational Power: 8 MIPs  
Program Flash Memory: 18 KB + 1.5 KB for each library word  
RAM: <3.0 KB



**MICROCHIP**

Development Systems

Microchip Technology Incorporated

## Host System Requirements

- PC-compatible system with an Intel Pentium® class or higher processor, or equivalent
- A minimum of 16 MB RAM
- A minimum of 16 MB available for hard drive space
- CD-ROM drive
- One available standard serial port with a matching COM port available through the operating system
- Microsoft Windows 98, Windows NT® 4.0, Windows 2000 or Windows XP

## Part Numbers and Ordering Information:

| dsPIC30F Speech Recognition Library |   |              |
|-------------------------------------|---|--------------|
| Part Number                         | Description   | Availability |
| SW300010-EVAL                       | dsPIC30F Speech Recognition Library Software License (Evaluation Only) <sup>(1)</sup>             | Now          |
| SW300010                            | dsPIC30F Speech Recognition Library Software License (Up to 5K units) <sup>(2)</sup>              | Now          |
| SW300011                            | dsPIC30F Speech Recognition Library Software License (5K+ to 25K units) <sup>(2)</sup>            | Now          |
| SW300012                            | dsPIC30F Speech Recognition Library Software License (25K+ to 100K units) <sup>(2)</sup>          | Now          |
| AC300031                            | Accessory Kit – Fixed 10-word Demo (includes: microphone, headset and 6.144 MHz clock oscillator) | Now          |

**Note 1:** The evaluation version offers the same functions and features as the other versions. The evaluation period is one year.  
**Note 2:** Quantities are per project, payable as a one-time license fee based on estimated lifetime volume for products resulting from the project. Please consult the factory for quantities above 100K.

| dsPIC® Development Tools from Microchip                               |                     |
|---|---------------------|
| MPLAB® IDE  | Free                |
| MPLAB® Visual Device Initializer (included in MPLAB® IDE)             |                     |
| MPLAB® C30 C Compiler   | SW006012            |
| MPLAB® ICD 2 In-Circuit Debugger/Programmer                           | DV164005, DV164007  |
| MPLAB® ICE 4000   | ICE4000             |
| MPLAB® PM3 Universal Device Programmer                                | DV007004            |
| dsPIC30F Math Library (included in download of MPLAB® C30 C Compiler) | Free                |
| dsPIC30F DSP Library  | Free                |
| dsPIC30F Peripheral Library   | Free                |
| dsPICworks™ Data Analysis and DSP Software                            | Free                |
| dsPIC® Digital Filter Design  | SW300001            |
| dsPIC30F Soft-Modem Library   | SW300002/3/4/5      |
| dsPIC® Speech Recognition Library                                     | SW300010/11/12      |
| dsPIC® Symmetric Key Embedded Encryption Library                      | SW300050            |
| dsPIC® Asymmetric Key Embedded Encryption Library                     | SW300055            |
| dsPIC30F Acoustic Echo Cancellation Library                           | SW300060            |
| dsPIC30F Noise Suppression Library                                    | SW300040            |
| CMX-RTX™ for dsPIC30F   | SW300031            |
| CMX-Tiny+™ for dsPIC30F   | SW300032            |
| CMX-Scheduler™ for dsPIC® Devices                                     | Free at www.cmx.com |
| dsPICDEM™ Starter Demonstration Board                                 | DM300016            |
| dsPICDEM™ 28-pin Starter Demonstration Board                          | DM300017            |
| dsPICDEM™ 1.1 General Purpose Development Board                       | DM300014            |
| dsPICDEM™ MC1 Motor Control Development System                        | DM300020            |
| dsPICDEM.net™ 1 Connectivity Development Boards                       | DM300004-1          |
| dsPICDEM.net™ 2 Connectivity Development Boards                       | DM300004-2          |

**Americas:** Atlanta (770) 640-0034 • Boston (978) 692-3848 • Chicago (630) 285-0071 • Dallas (972) 818-7423 • Detroit (248) 538-2250 • Kokomo (765) 864-8360 • Los Angeles (949) 462-9523 • Phoenix (480) 792-7200 • San Jose (650) 215-1444 • Toronto (905) 673-0699 • **Asia/Pacific:** Australia-Sydney 61-2-9868-6733 • China-Beijing 86-10-8528-2100 • China-Chengdu 86-28-8676-6200 • China-Fuzhou 86-591-8750-3506 • China-Hong Kong SAR 852-2401-1200 • China-Qingdao 86-532-502-7355 • China-Shanghai 86-21-5407-5533 • China-Shenyang 86-24-2334-2829 • China-Shenzhen 86-755-8203-2660 • China-Shunde 86-757-2839-5507 • India-Bangalore 91-80-2229-0061 • Japan-Kanagawa 81-45-471-6166 • Korea-Seoul 82-2-554-7200 • Singapore 65-6334-8870 • Taiwan-Taipei 886-2-2500-6610 • Taiwan-Kaohsiung 886-7-536-4818 • Taiwan-Hsinchu 886-3-572-9526 • **Europe:** Austria-Weis 43-7242-2244-399 • Denmark-Ballerup 45-4420-9895 • France-Massy 33-1-69-53-63-20 • Germany-Ismaning 49-89-627-144-0 • Italy-Milan 39-0331-742611 • Netherlands-Drunen 31-416-690399 • England-Berkshire 44-118-921-5869 (As of 11/04)

Microchip Technology Inc. • 2355 W. Chandler Blvd. • Chandler, AZ 85224-6199 USA • (480) 792-7200 • FAX (480) 792-7277

The Microchip name and logo, the Microchip logo, Accuron, dsPIC, KEELoq, microID, MPLAB, PIC, PICmicro, PICSTART, PRO MATE, PowerSmart, rPIC, and SmartShunt are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. AmpLab, FilterLab, MXDEV, MXLAB, PICMASTER, SEEVAL, SmartSensor and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A. Analog-for-the-Digital Age, Application Maestro, dsPICDEM, dsPICDEM.net, dsPICworks, ECAN, ECONOMONITOR, FanSense, FlexROM, fuzzyLAB, In-Circuit Serial Programming, ICSP, ICEPIC, Migratable Memory, MPASM, MPLIB, MPLINK, MPSIM, PICKit, PICDEM, PICDEM.net, PICLAB, PICtail, PowerCal, PowerInfo, PowerMate, PowerTool, rLAB, rPICDEM, Select Mode, Smart Serial, SmartTel and Total Endurance are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. SQTP is a service mark of Microchip Technology Incorporated in the U.S.A. All other trademarks mentioned herein are property of their respective companies.

© 2004, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved. 11/04

DS51465B

