




# STPAC02F2

## IPAD™

RF Detector for power amplifier control with internal temperature compensation

### Main product characteristics

- 0.8 to 2.5 GHz frequency range
- Detection diode voltage drop compensation
- Temperature compensation
- Fast response time
- Low Power consumption
- Chip Scale device
- Low parasitic impedance
- Lead free package

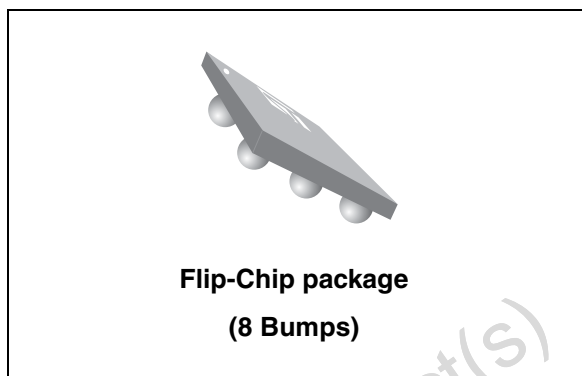


### Description

The STPAC02F2 is an integrated RF detector for power control chain. It has been developed to convert the RF signal coming from the external coupler into a DC signal usable by the mobile digital stage. It is based on the use of two similar diodes, one assuming the signal detection while the second one is used to compensate the ambient temperature effect. A biasing stage suppresses the detection diode drop voltage effect. The use of the IPAD technology allows the RF front-end designer to save PCB area and to drastically suppress the parasitic inductances of the package.

Target applications are cellular phones and PDA using GSM, DCS, PCS, AMPS, TDMA, CDMA and 800 MHz to 2100 MHz frequency ranges.

### Pin configuration

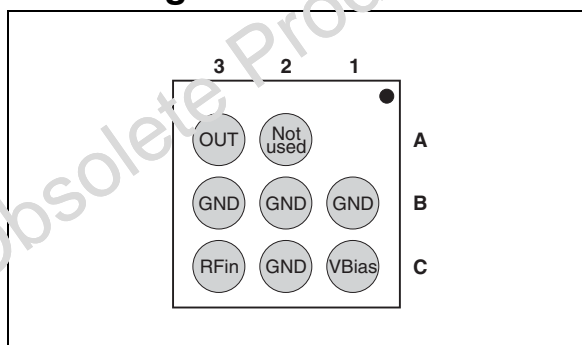

### Order code

Part number	Marking
STPAC02F2	RB

### Benefits

- The use of IPAD technology allows the RF front-end designer to save PCB area and to drastically suppress the parasitic inductances.

# 1 Characteristics

Figure 1. Functional diagram

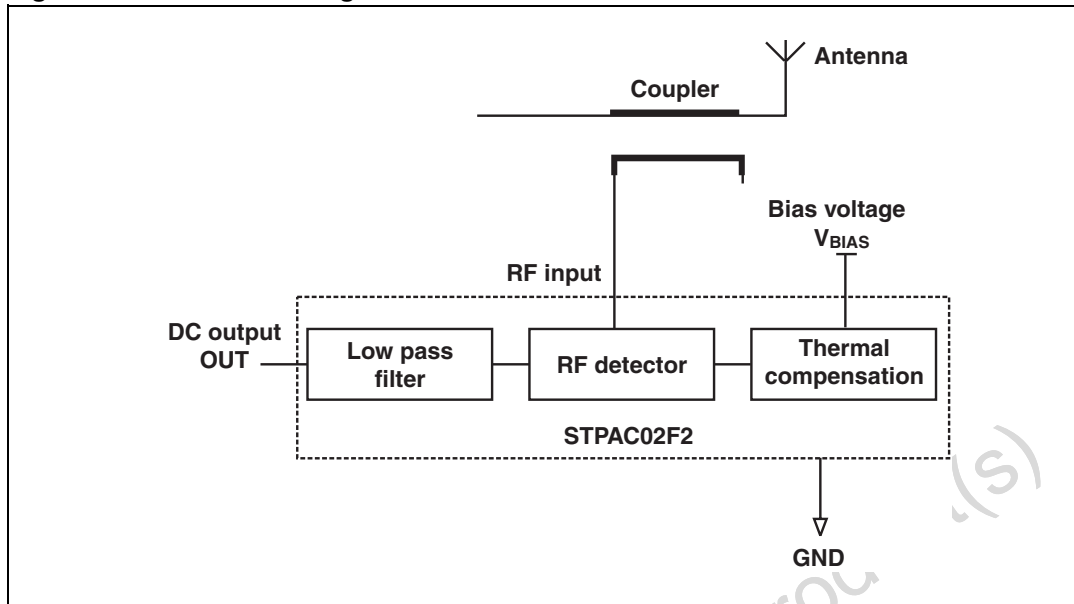


Table 1. Absolute ratings ( $T_{amb} = 25^{\circ} C$ )

Symbol	Parameter and test conditions	Value	Unit
$V_{BIAS}$	Bias voltage	5	V
$P_{RF}$	RF power at the RF input	20	dbm
$F_{OP}$	Operating frequency range	0.8 to 2.5	GHz
$V_{PP}$	ESD level as per MIL-STD 883E method 3015.7 notice 8 (HBM)	250	V
$T_{OP}$	Operating temperature range	- 30 to + 85	$^{\circ}C$
$T_{STG}$	Storage temperature range	- 55 to 150	$^{\circ}C$

## 1.1 Electrical characteristics ( $T_{amb} = 25^{\circ} C$ )

Table 2. Parameters related to bias voltage

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{BIAS}$	Operating bias voltage		2.3	2.8	3.3	V
$I_{BIAS}$	Bias current	$V_{BIAS} = 3.3 V$		1.1	1.6	mA


**Table 3. Parameters related to detection function** ( $V_{BIAS} = 2.8\text{ V}$ , DC output load = 200 k $\Omega$ )

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$V_{DCout}$	DC output voltage (see <a href="#">Figure 2.</a> )	F = 1.75 GHz, $P_{RF} = 10\text{ dbm}$	0.63	0.69	0.75	V
		F = 1.75 GHz, $P_{RF} = -20\text{ dbm}$	0.20	0.22	0.24	
		F = 0.9 GHz, $P_{RF} = 10\text{ dbm}$	0.69	0.75	0.83	
		F = 0.9 GHz, $P_{RF} = -20\text{ dbm}$	0.20	0.22	0.24	
$\Delta V_{DCout}$	DC output voltage variation (see <a href="#">Figure 2.</a> )	2.3 V < $V_{BIAS}$ < 3.3 V, F = 1.85 GHz, $P_{RF} = 10\text{ dbm}$		100		mV


**Table 4. Parameters related to response time** ( $V_{BIAS} = 2.8\text{ V}$ , DC output load = 200 k $\Omega$ )

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{VBIAS}$	Delay at $V_{BIAS}$ ON (see <a href="#">Figure 4.</a> )	$V_{BIAS}$ from 0 to 3 V		1		V
$t_{RFon}$	Delay at RF ON (see <a href="#">Figure 3.</a> )	$P_{RF}$ from 0 to 20 dbm		0.2		
$t_{RFOff}$	Delay at RF OFF (see <a href="#">Figure 3.</a> )	$P_{RF}$ from 20 to 0 dbm		0.2		


**Figure 2.  $V_{DC}$  output measurement circuit and temperature compensation measurement**

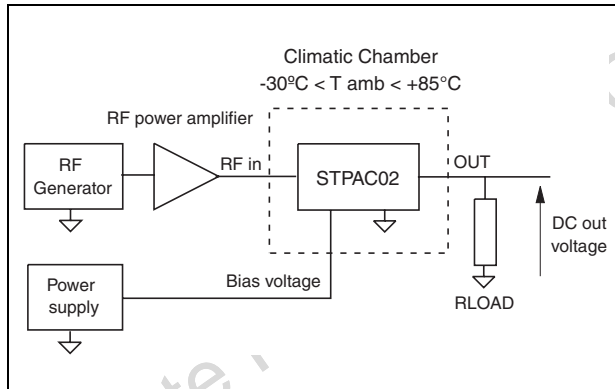


**Figure 3. RF Power ON/OFF response time set-up**

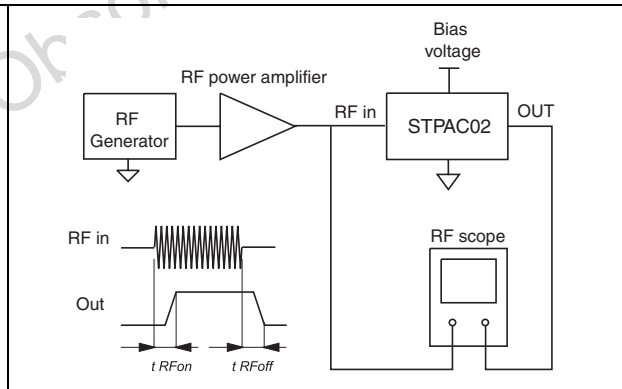


**Figure 4. Power supply turn ON response time**

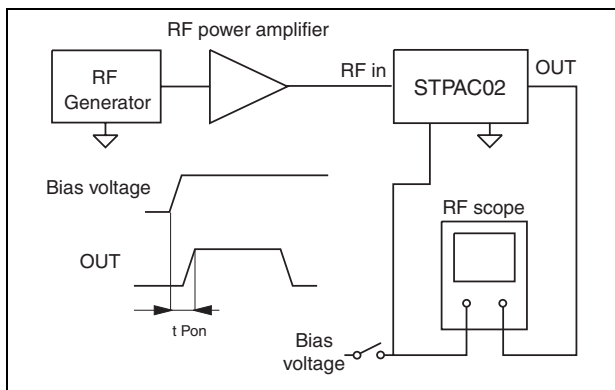


**Figure 5. Temperature sensitivity versus RF Power in ( $V_{BIAS} = 2.8\text{ V}$ , Freq. = 900 MHz)**

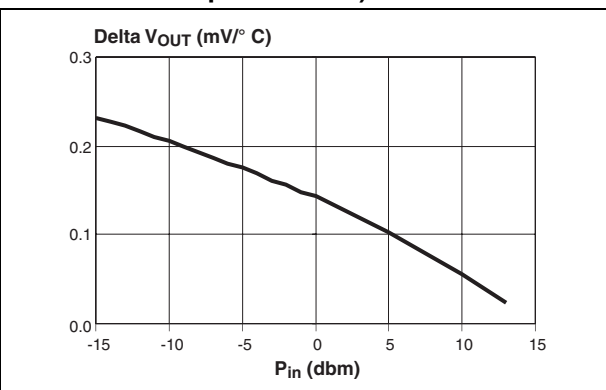


**Figure 6. STPAC02 Output voltage at wide RF power range**

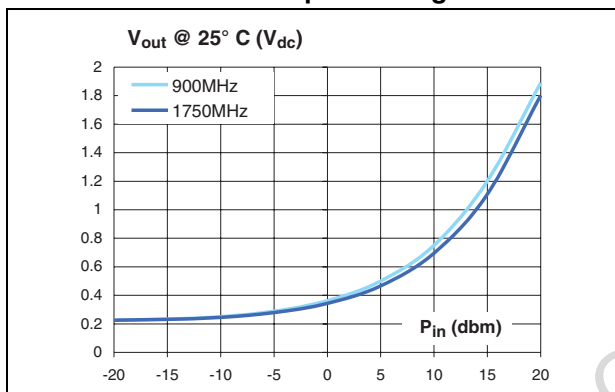


**Figure 7. Power detector sensitivity at wide RF power range**

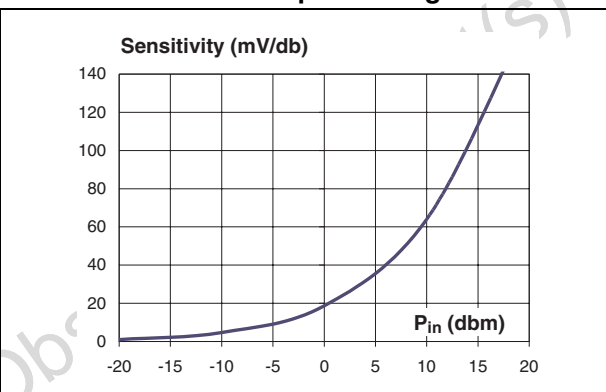

**Figure 8. STPAC02 Output voltage at low RF power**

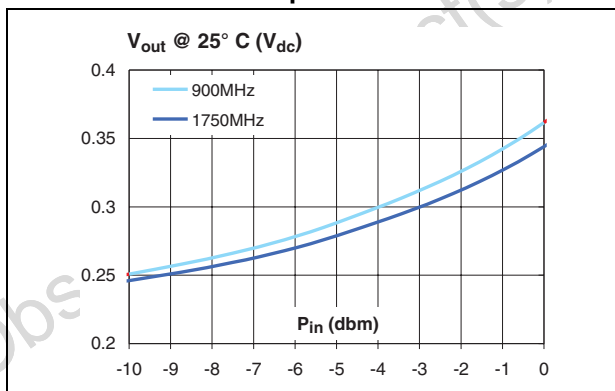

**Figure 9. Power detector sensitivity at low RF power**

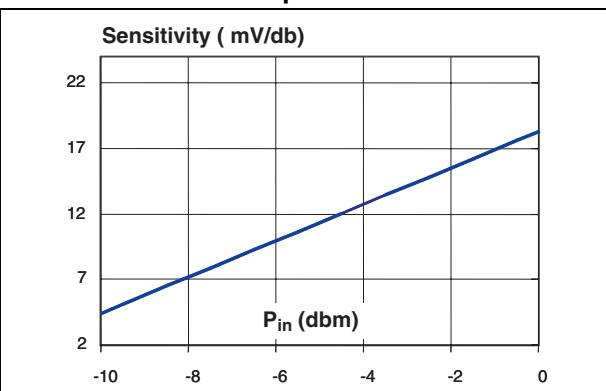



### 3 Ordering information

Ordering code	Marking	Package	Weight	Base qty	Delivery mode
STPAC02F1	RB	Flip-Chip	3.3 mg	5000	Tape and reel

Note: More packing informations are available in the application notes:  
AN1235: "Flip-Chip: Package description and recommendations for use"  
AN1751: "EMI Filters: Recommendations and measurements"

### 4 Revision history

Date	Revision	Changes
16-May-2006	1	Initial release.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF ST, ST PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS, WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)