


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

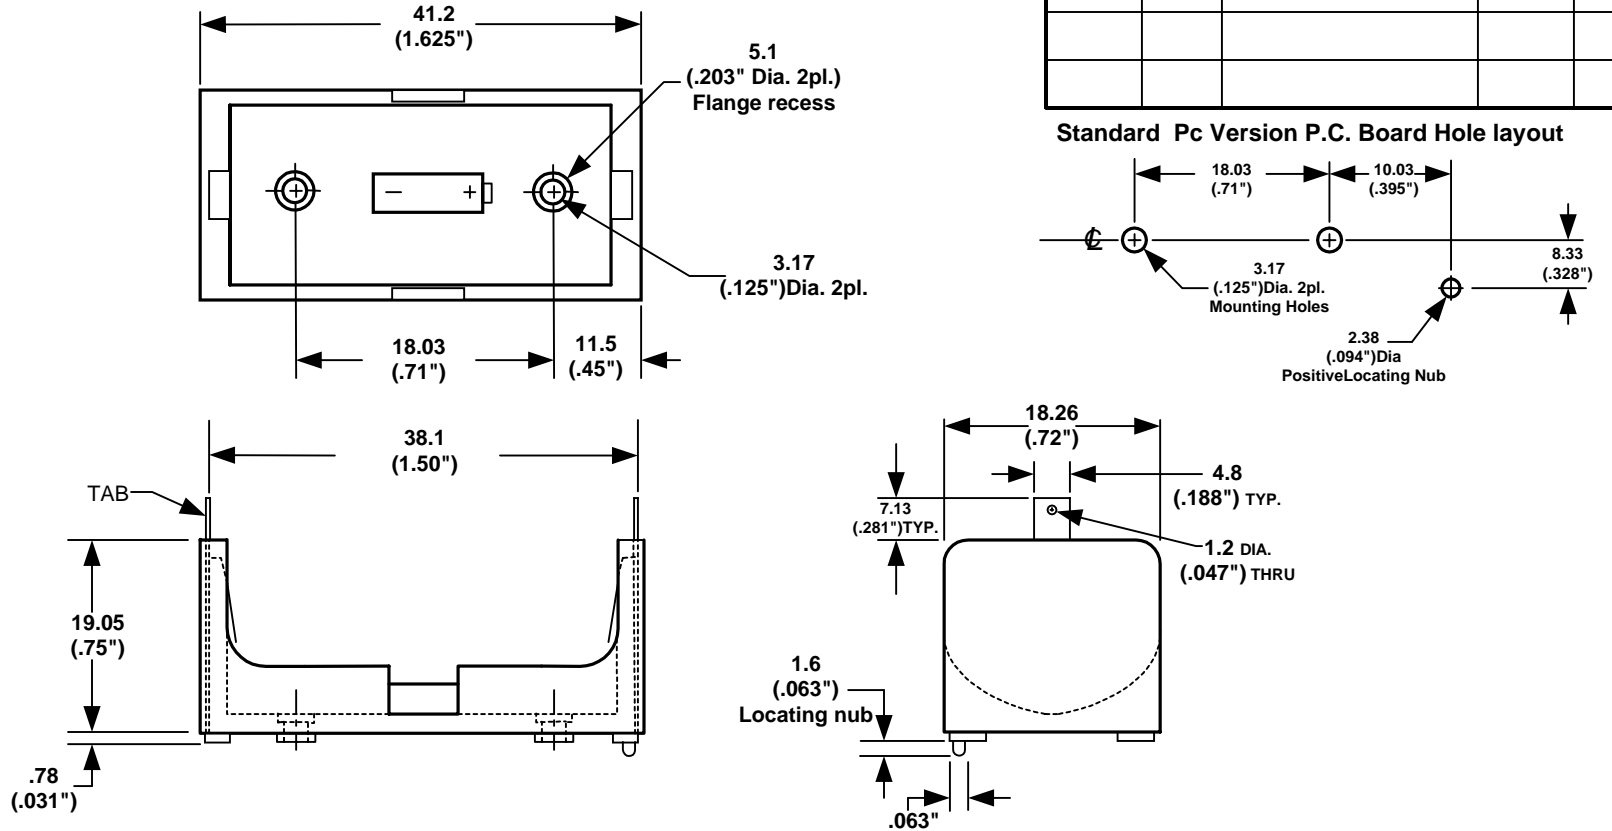

SPECIFICATIONS

Material:

Holder
 Flammability Rating
 Dielectric Strength
 Temperature Range
 Resistance to Solvent

Self extinguishing thermoplastic, PBT, black
 UL94 V-O, File No. E88499 (M)
 560 volts/ mil at 25° C for 5 sec.
 -55°C to 180°C.
 Xylene, Ethyl, Butyl, Methyl, Propyl alcohol,
 Ethyl acetate, Refrigerants, Heptane & Toluene.
 302 Spring Tempered Stainless Steel Nickel Plated
 7.3 Grams

Contacts
 Weight


NOTE:

Eyelet Simpson Style # A1883 .110"OD. x .190"flange
 Flange recess .203" Dia. X .090" deep
 Accepts standard 2-56 machine screws
 .188 Tab accepts AMP Faston #640917-1 or Equal

Accessories:

BI - UM - 3 - 4, Insulator

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL + .5 (.020) - .5 (.020)	SCALE	DRAWN BY s.c.	
FRACTIONAL + .8 (.030) - .8 (.030)	APPROVED BY		
ANGULAR + 3° - 3°	DATE 10/18/00	DRAWING NUMBER BH2/3AT	
2/3 "A" CELL BATTERY HOLDER			