


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
2/25/06	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
5/02/08	B	UPDATED NOTE	T.B.	B.S.	

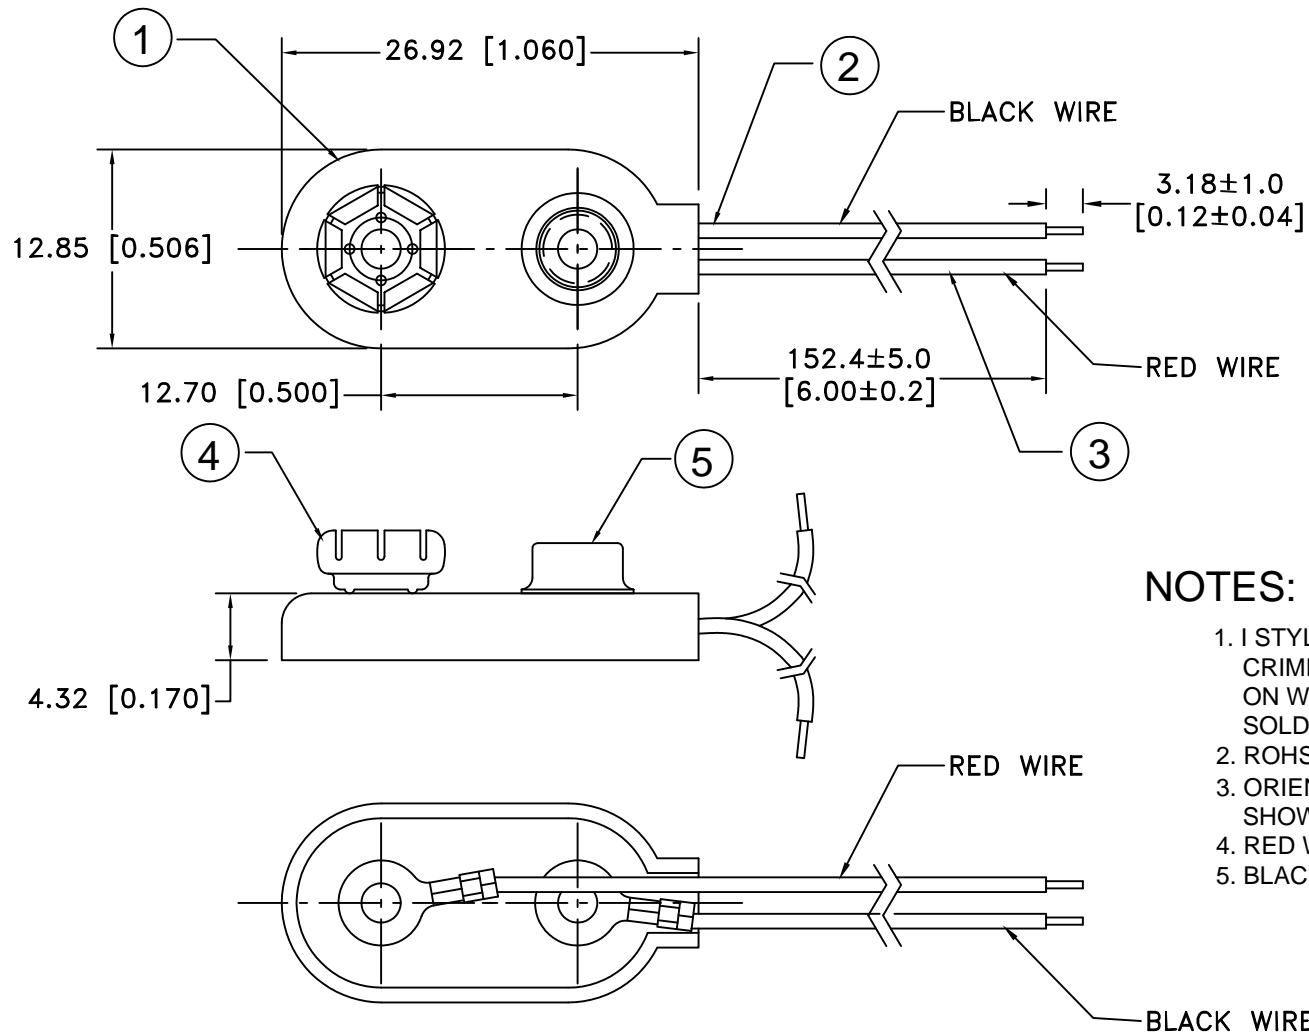

NOTES:

1. I STYLE 2 PCS. MOLDED CASE CONSTRUCTION WITH CRIMP CONNECTIONS. CRIMP ON WIRE INSULATION AND ON WIRE PROVIDES STRAIN RELIEF THAT STANDARD SOLDERED SNAPS DO NOT HAVE.
2. ROHS COMPLIANT
3. ORIENTATION OF SNAPS AND WIRES VARIES AND IS SHOWN FOR REFERENCE ONLY.
4. RED WIRE TO POSITIVE CONTACT.
5. BLACK WIRE TO NEGATIVE CONTACT.

N0.	PART NAME	MATERIAL	QTY.	Tolerance (Except as noted)	Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
1	MOLDED CASE	2 PCS., POLYETHYLENE, WHITE WITH BLUE INSERT	1	decimal ±.5 (.020)	Scale	Drawn By B.S.	
2	BLACK WIRE(-)	24 AWG OR 26 AWG, UL-1007, CSA TR-64, 300V, 80°C	1			Approved By T.B.	
3	RED WIRE (+)	24 AWG OR 26 AWG, UL-1007, CSA TR-64, 300V, 80°C	1	Fractional ± .8 (.030)	Title 9 VOLT BATTERY SNAP-I STYLE-6" WIRE LEADS, MOLDED CASE		
4	FEMALE SNAP	BRASS NICKLE PLATED	1		Date	Drawing Number	
5	MALE SNAP	BRASS NICKLE PLATED	1		5/02/08	BS6I-MC	
				Angular ± 3°			