

PR33MD22NSZ series

Solid State Relay

Low Minimum Trigger Current Type Small Current SSR

General Description

Sharp's **PR33MD22NSZ series** is low minimum trigger current type small current SSR(8-pin DIP package).

Features


- (1) 8-pin DIP package
- (2) Low minimum trigger current($I_{T}=5\text{mA}$)
- (3) With built-in zero-cross circuit
- (4) RMS ON-state current
 - $I_T=0.3\text{Arms}$: **PR33MD22NSZ**
 - $I_T=0.6\text{Arms}$: **PR36MD22NSZ**
 - $I_T=0.9\text{Arms}$: **PR29MD22NSZ**
 - $I_T=0.9\text{Arms}$: **PR39MD22NSZ**
- (5) Isolation voltage(V_{iso} : 4 000Vrms)

Applications

- (1) TVs
- (2) VCRs
- (3) Various home appliances

Outline Dimensions

(Unit: mm)

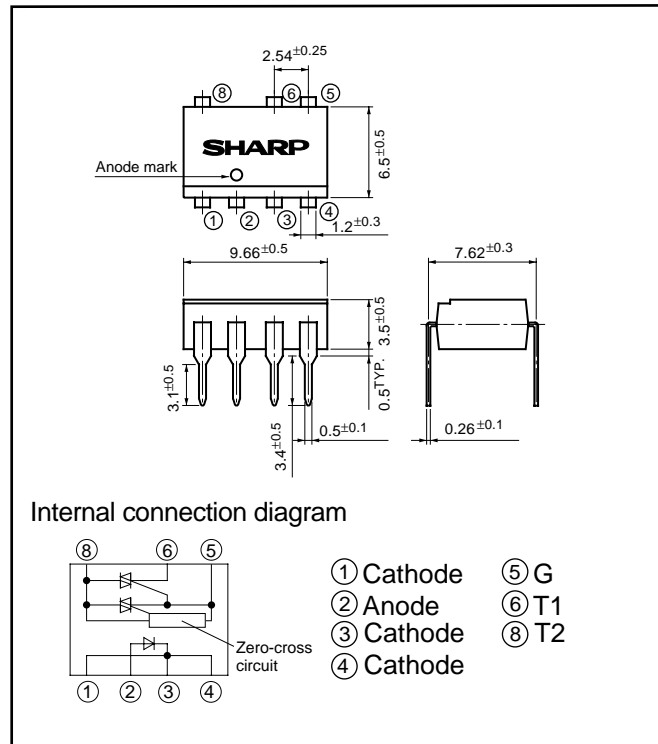

Absolute Maximum Ratings

($T_a=25^\circ\text{C}$)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	Reverse voltage	V_R	6	V
Output	RMS ON-state current	I_T	*	A_{rms}
	*1 Peak one cycle surge current	I_{surge}	**	A
	Repetitive peak OFF-state voltage	V_{DRM}	***	V
	*2 Isolation voltage	V_{iso}	4 000	V_{rms}
	Operating temperature	T_{opr}	-25 to +85	$^\circ\text{C}$
	Storage temperature	T_{stg}	-40 to +125	$^\circ\text{C}$
	*3 Soldering temperature	T_{sol}	260	$^\circ\text{C}$

* PR33MD22NSZ : 0.3Arms , PR36MD22NSZ : 0.6Arms , PR29MD22NSZ : 0.9Arms , PR39MD22NSZ : 0.9Arms

** PR33MD22NSZ : 3A , PR36MD22NSZ : 6A , PR29MD22NSZ , PR39MD22NSZ : 9A

*** PR33MD22NSZ , PR36MD22NSZ , PR39MD22NSZ : 600V , PR29MD22NSZ : 400V

*1 50Hz, sine wave

*2 AC for 1 minute, 40 to 60% RH, $f=60\text{Hz}$

*3 For 10s

(Notice) • In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

• Specifications are subject to change without notice for improvement.

(Internet) • Data for Sharp's optoelectronic/power devices is provided on internet. (Address <http://www.sharp.co.jp/ecg/>)

PR33MD22NSZ series

Solid State Relay

■ Electrical Characteristics

(Ta=25°C)

	Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F =20mA	-	1.2	1.4	V
	Reverse current	I _R	V _R =3V	-	-	10	μA
Output	Repetitive peak OFF-state current	I _{DRM}	V _D =V _{DRM}	-	-	100	μA
	ON-state voltage	V _T	I _T =**	-	-	3.0	V
	Holding current	I _H	V _D =6V	-	-	25	mA
	Critical rate of rise of OFF-state voltage	dv/dt	V _D =(1/√2)•V _{DRM}	100	-	-	V/μs
	Zero-cross voltage	V _{OX}	Resistance load, I _F =10mA	-	-	35	V
Transfer characteristics	Minimum trigger current	I _{FT}	V _D =6V, R _L =100Ω	-	-	5	mA
	Isolation resistance	R _{ISO}	DC500V, 40 to 60%RH	5 x 10 ¹⁰	1 x 10 ¹¹	-	Ω
	Turn-on time	t _{on}	V _D =6V, R _L =100Ω I _F =10mA	-	-	100	μs

** PR33MD22NSZ : 0.3A , PR36MD22NSZ : 0.6A , PR29MD22NSZ , PR39MD22NSZ : 0.9A

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.