

DENSI-PAK® BATTERY HOLDERS

- Supports high density packaging on or off board, positions anywhere for easy access to battery
- Economical design
- Batteries securely held in place to assure a positive connection and maintain a low contact resistance
- Contact springs self-adjust to variations in battery length
- Snap-on cover protects battery
- Recessed or fully enclosed contacts
- Withstands shock and vibration


SPECIFICATIONS

Holder: ABS
Springs: Spring Steel, Nickel Plate
Wires (Red & Black): 6.0 (150) long, #26 AWG, Tinned, .187 (4.8) end strip UL/CSA1007




For "AA"

Holds Two (2) "AA" Cells in Series

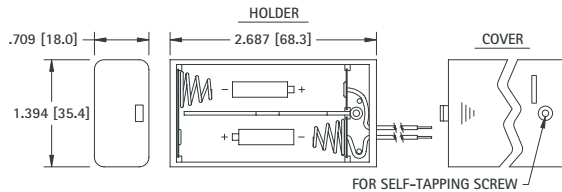

CAT. NO. 2490


Holds Three (3) "AA" Cells in Series

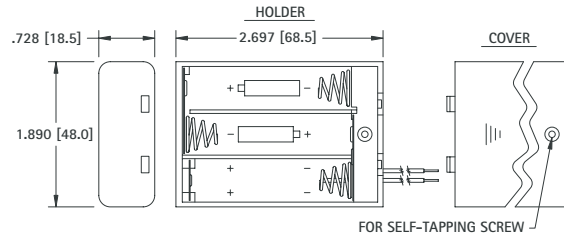

CAT. NO. 2487


For "AAA"

Holds Two (2) "AAA" Cells in Series

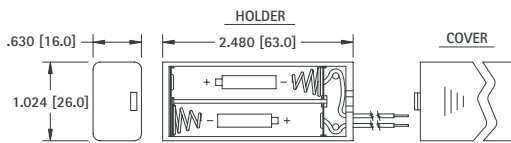

CAT. NO. 2489

Holds Three (3) "AAA" Cells in Series

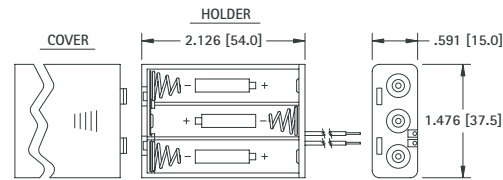

CAT. NO. 2484


PLASTIC BATTERY HOLDERS WITH SNAP-ON CONNECTORS

- Features separable "snap-on/snap-off" battery connector (9 Volt type) to assure reliable connections to battery powered equipment, controls and systems
- Economical design, holders available for two, three or four cells. Wired in series to accept connector (9 Volt type)
- Batteries securely held in place to maintain a positive contact and a low contact resistance
- Battery contact springs self adjust to variations in battery length
- Withstands shock and vibration
- Ideally mates with Keystone 9 Volt battery straps and connectors (Refer to pages 22 & 23)

SPECIFICATIONS


Holder: Polypropylene
Male/Female Contacts: Brass, Nickel Plate
Springs: Spring Steel, Nickel Plate

Holds Two (2) "AA" Cells in Series

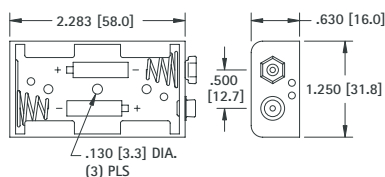


CAT. NO. 2474

Holds Three (3) "AA" Cells in Series

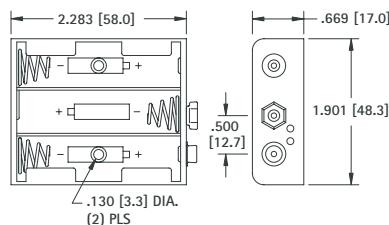

CAT. NO. 2475

Holds Four (4) "AA" Cells in Series

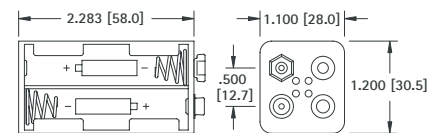

CAT. NO. 2476