



| DATE | SYM | REVISION RECORD | AUTH | DR. | CK. |
|---------|-----|---|------|------|-----|
| 3/24/07 | A | DIM. 107.8 WAS 107.9 DIM. 9.5 WAS 8.89 DIM. 50.2 WAS 49.5 | T.B. | B.S. | |
| | | | | | |

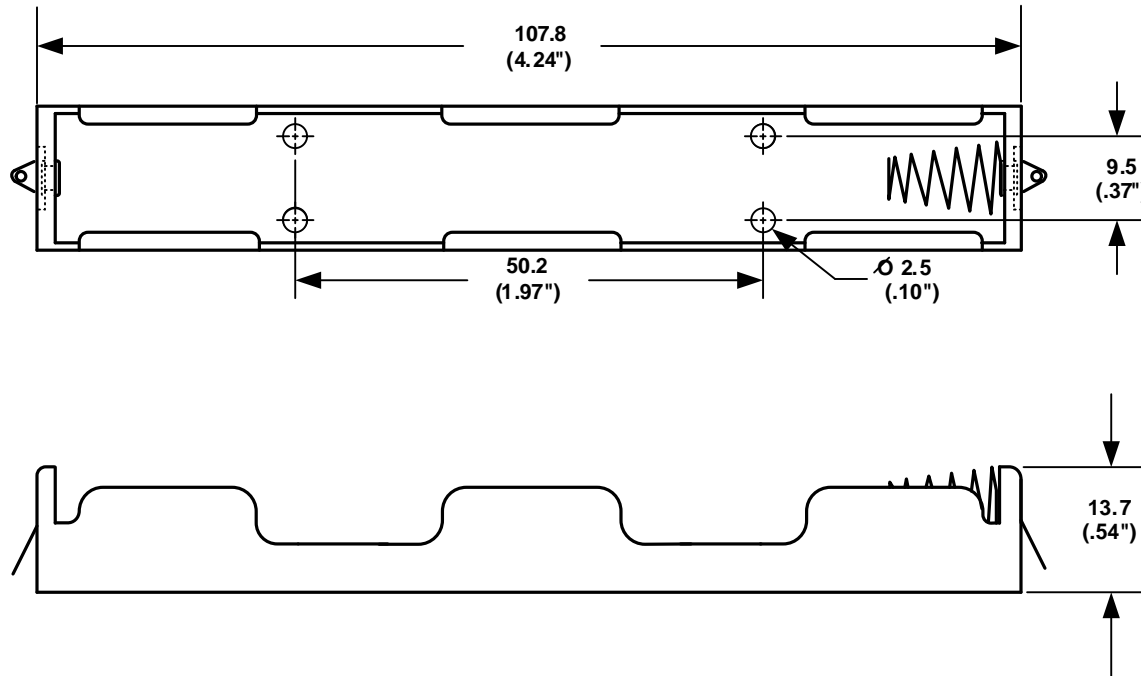

ORDERING CODE BC12AA


SOLDER LUGS = L
(6") WIRE LEADS = W
9 VOLT TYPE SNAPS = SF



Note: Dimensions in mm. (inches)

SPECIFICATIONS :

Plastic material - polypropylene
 Springs - nickel plated spring steel
 Wire - 152.4 mm Ref. Long 26 AWG,
 UL1007, CSA - TR-64, 300V, 80°C
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated

| | | | |
|---------------------------------|-----------|--|------------------|
| TOLERANCES (EXCEPT AS NOTED) | |  Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735 | |
| DECIMAL | | | |
| + .5 (.020") | | NONE | APPROVED BY T.B. |
| FRACTIONAL | TITLE | TWO "AA" CELL HOLDER | |
| + .8 (.030") | | | |
| ANGULAR | DATE | DRAWING NUMBER | |
| + 3° | 3/24/2007 | BC12AAL | |