



DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

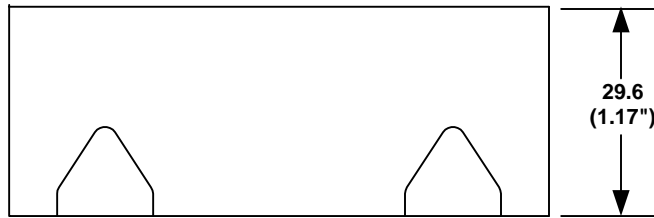

(6") WIRE LEADS SHOWN ABOVE

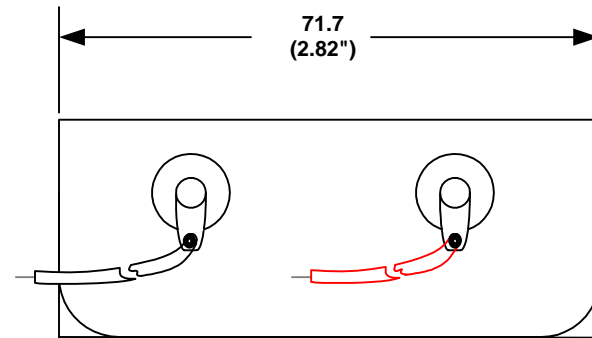


Note: Dimensions in mm. (inches)

SPECIFICATIONS:

- Plastic material - polypropylene
- Springs - nickel plated spring steel
- Wire - 152.4 mm ref.Long 26 AWG, UL1007, CSA - TR-64, 300V, 80°C.
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated

ORDERING CODE **BC24D**

SOLDER LUGS	=	L
(6") WIRE LEADS	=	W
9VOLT TYPE SNAPS	=	SF

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL			
+ .5 (.020")			APPROVED BY
- .5 (.020")		TITLE FOUR "D" CELL HOLDER	
FRACTIONAL		DATE	DRAWING NUMBER
+ .8 (.030")		11/27/2000	BC24DW
ANGULAR			
+ 3°			
- 3°			