
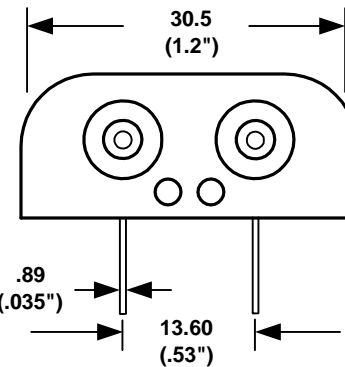
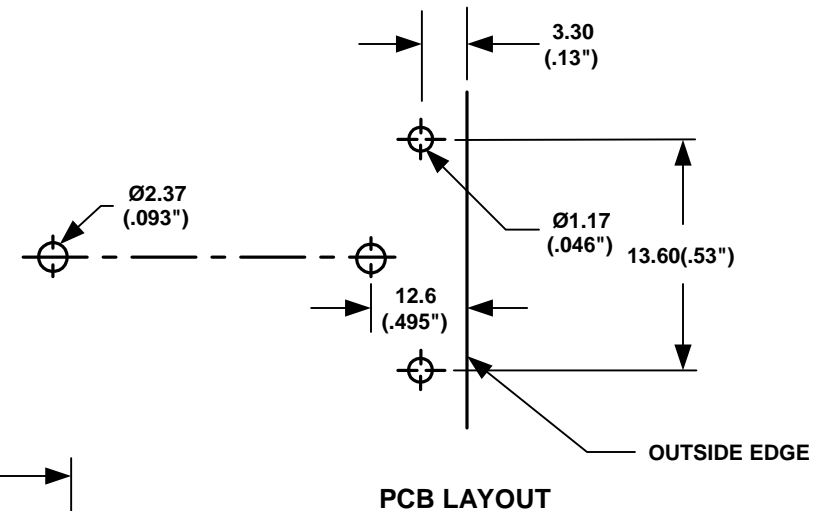


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
2/25/06	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/04/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
4/29/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	

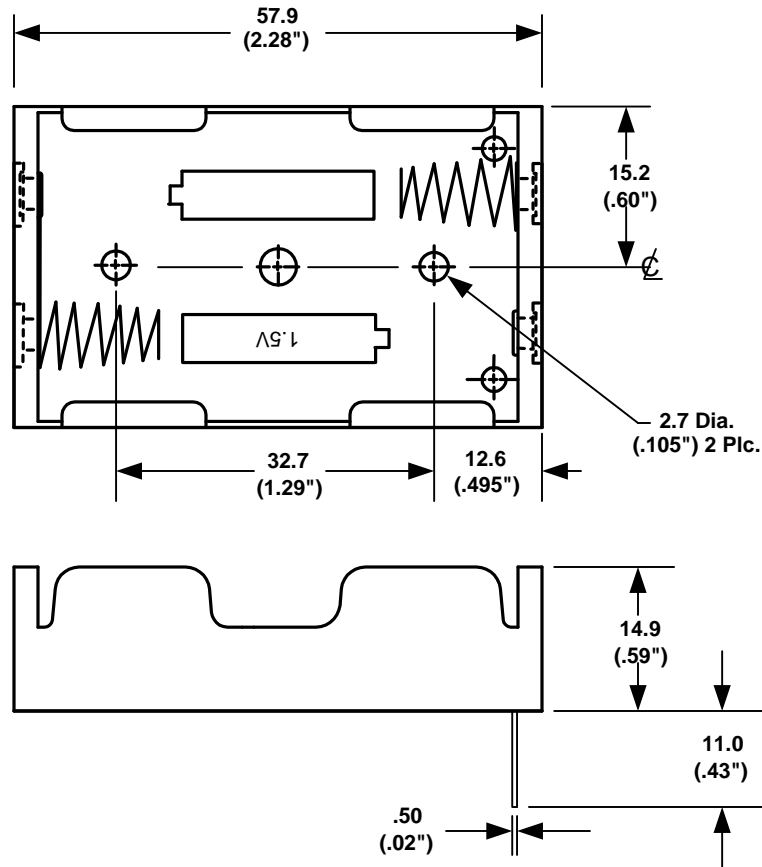


**SPECIFICATIONS :**

Plastic material - Polypropylene, Black  
 Flammability rating-UL94 HB, UL file no. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - nickel plated spring steel  
 Rivets - Brass, nickel plated  
 Contacts: Spring Steel, Nickle Plated  
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000  
 ROHS COMPLIANT

**ORDERING CODE BC2AA**

<b>SOLDER LUGS</b>	= L
<b>(6") WIRE LEADS</b>	= W
<b>9 VOLT TYPE SNAPS</b>	=SF
<b>PC PINS</b>	=PC

**Note: Dimensions in mm. ( inches )**

TOLERANCES (EXCEPT AS NOTED)		 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	+ .5 (.020") - .5 (.020")	SCALE	DRAWN BY B.S.
FRACTIONAL		NONE	APPROVED BY
ANGULAR	+ 3° - 3°	<b>TITLE</b> TWO "AA" CELL HOLDER	
		DATE	DRAWING NUMBER
		4/29/2006	BC2AAPC