

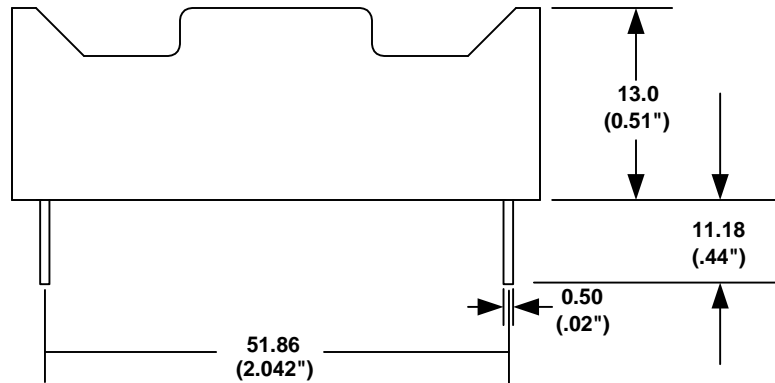
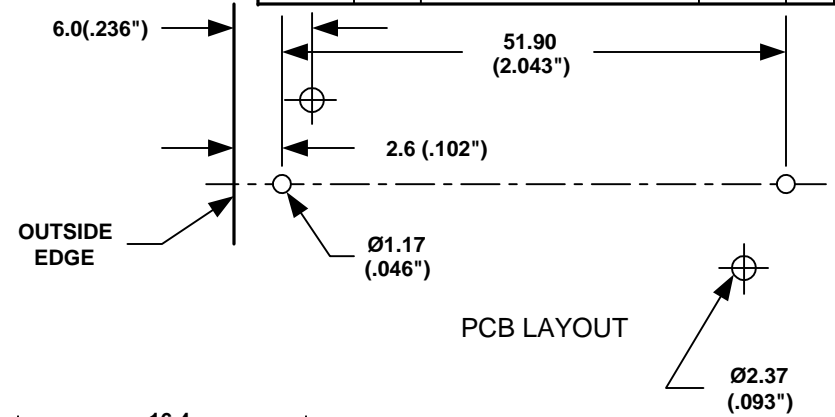


| DATE | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|---------------------------|------|------|-----|
| 11/19/05 | A | ADDED "ROHS COMPLIANT" | T.B. | B.S. | |
| 3/18/06 | B | UPDATED MATERIAL SPEC. | T.B. | B.S. | |
| 4/29/06 | C | ADDED CONTACT RESI. INFO. | T.B. | B.S. | |

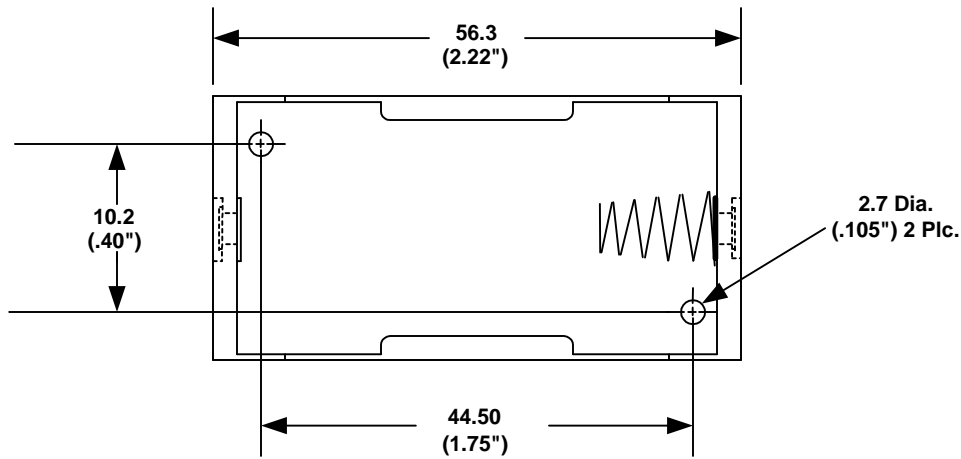


ORDERING CODE **BCAA**

| | |
|-------------------|------|
| SOLDER LUGS | = L |
| (6") WIRE LEADS | = W |
| 9 VOLT TYPE SNAPS | = SF |
| PC PINS | = PC |

SPECIFICATIONS :

Plastic material - Polypropylene, Black
 Flammability rating-UL94 HB, UL file no. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Rivets - Brass, Nickel Plated
 Contacts - Spring Steel, Nickle Plated
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLIANT

Note: Dimensions in mm. (inches)

| | | | |
|---------------------------------|-----------------------------|--|-------------|
| TOLERANCES (EXCEPT AS NOTED) | |  Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735 | |
| DECIMAL | | | |
| + .5 (.020") | | NONE | B.S. |
| - .5 (.020") | | | APPROVED BY |
| FRACTIONAL | TITLE | | |
| + .8 (.030") | ONE "AA" CELL HOLDER | | |
| - .8 (.030") | | | |
| ANGULAR | DATE | DRAWING NUMBER | |
| + 3° | 4/29/2006 | BCAAPC | |
| - 3° | | | |