


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

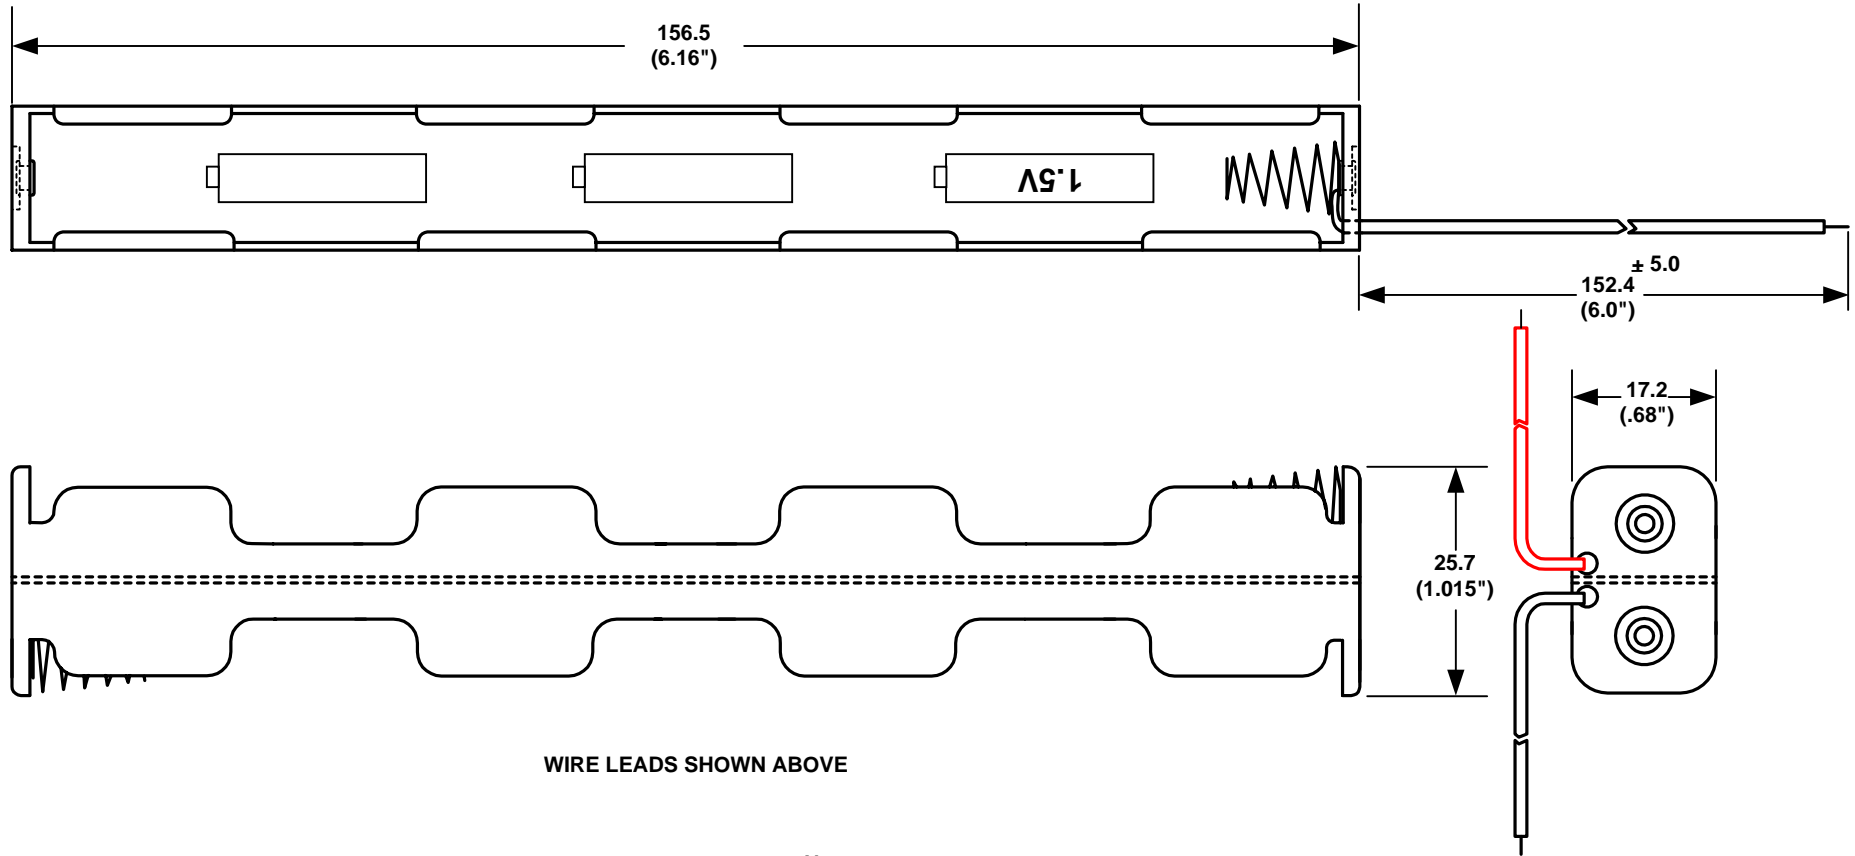

WIRE LEADS SHOWN ABOVE


ORDERING CODE BH16AA

**SPECIFICATIONS :**

Plastic material - polypropylene  
 Springs - nickel plated spring steel  
 Wire - 152.4 mm Ref.Long 26 AWG,  
 UL1007, CSA - TR-64, 300V, 80°C.  
 Rivets - Brass, nickel plated  
 9 Volts Snaps - Brass, nickel plated

SOLDER LUGS = L  
 (6") WIRE LEADS = W  
 9 VOLT TYPE SNAPS =SF

Note: Dimensions in mm. ( inches )

TOLERANCES (EXCEPT AS NOTED)		 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL		SCALE	DRAWN BY S.C.
+ .5 (.020")		NONE	APPROVED BY
FRACTIONAL	TITLE	SIX "AA" CELL HOLDER	
+ .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	05/10/2001	BH16AAW	