


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
1/14/06	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/18/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/06/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	
1/12/08	D	RANGE WAS "RANGEE"	T.B.	B.S.	

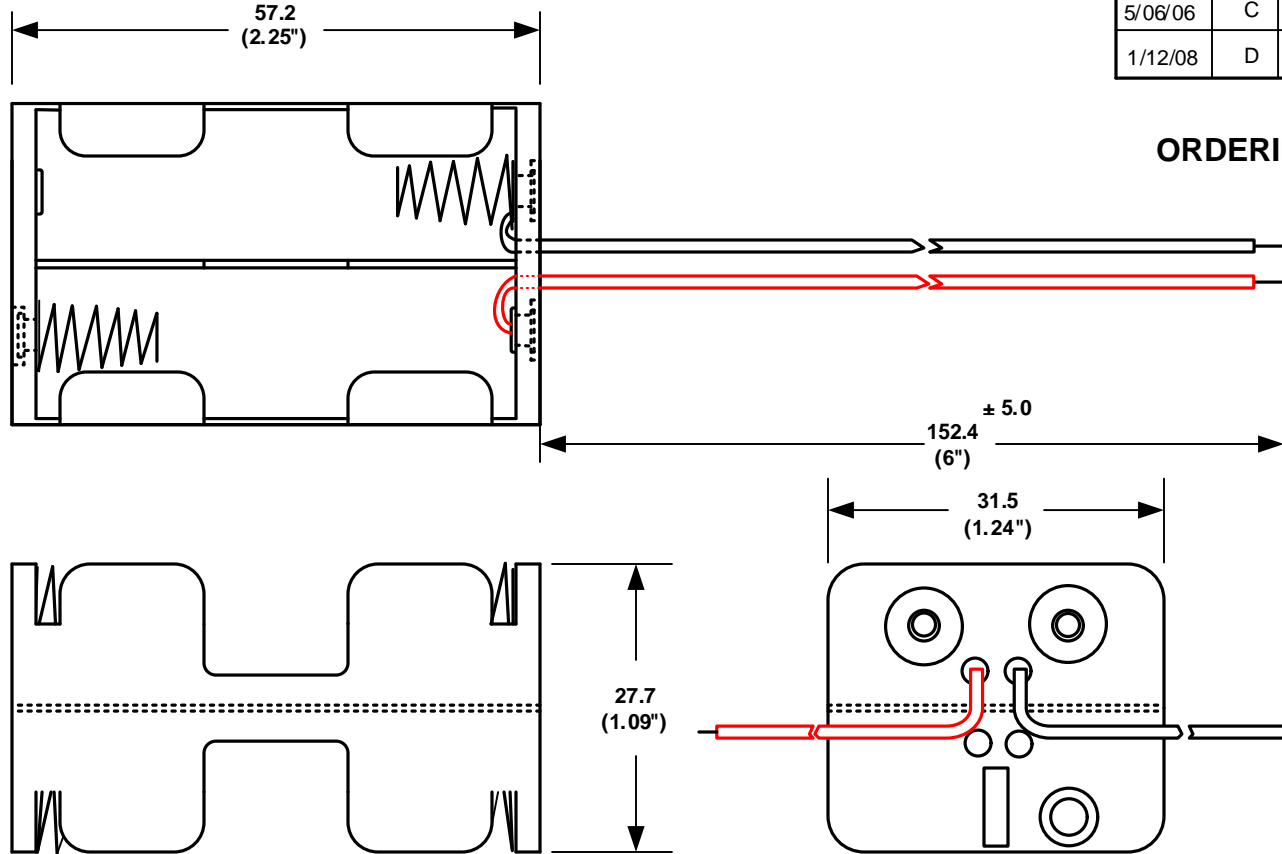

ORDERING CODE BH24AA


SOLDER LUGS = L
 (6 inch) WIRE LEADS = W
 9 VOLT TYPE SNAPS = SF

WIRE LEADS SHOWN ABOVE

SPECIFICATIONS :

- Plastic material - polypropylene
- Flammability Rating-UL94 HB, UL File No. E216959
- Temperature Range: -10°C to +100°C
- Springs - nickel plated spring steel
- Wire - 152.4 mm Long 26 AWG, UL1007, CSA - TR-64, 300V, 80° C.
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated
- Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
- ROHS COMPLIANT

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL	+ .5 (.020") - .5 (.020")	SCALE	DRAWN BY S.C.
		NONE	APPROVED BY
FRACTIONAL	+ .8 (.030") - .8 (.030")	TITLE	
		FOUR "AA" CELL HOLDER	
ANGULAR	+ 3° - 3°	DATE	DRAWING NUMBER
		1/12/2008	BH24AAW