


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/22/05	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/18/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/06/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	

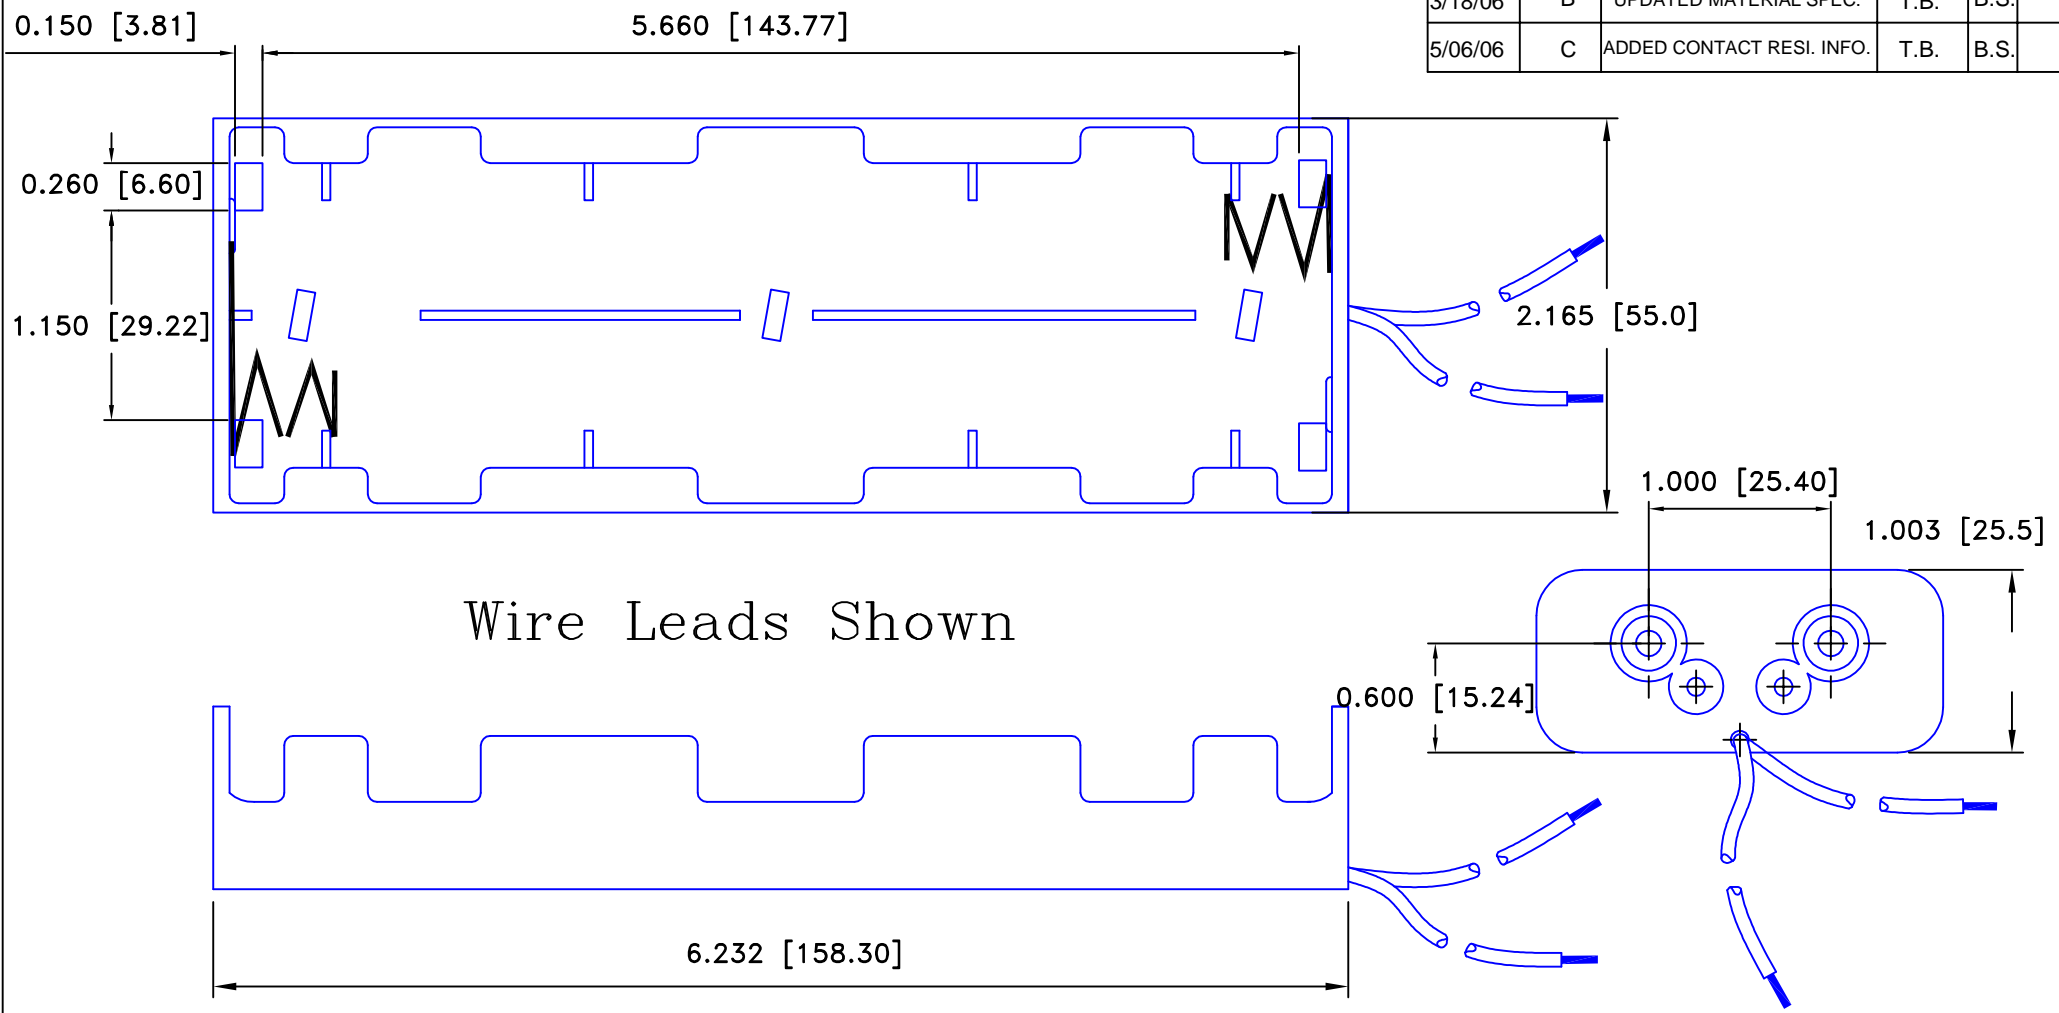


Wire Leads Shown

ORDERING CODE BH26C 

**SPECIFICATIONS**

Plastic material - Polypropylene  
 Flammability Rating -UL94-HB, UL File NO. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - Nickel Plated Spring Steel  
 Wire - 26 AWG, UL1007, CSA  
 Rivets - Brass, Nickel Plated  
 9Volt Snaps - Brass, Nickel Plated  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/-  
 CONTACTS PER EIA-540J000  
 ROHS COMPLIANT

L- Solder Lugs  
 W- (6") Wire Leads  
 SF- 9Volt type snaps  
 B- Bump plates

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
		1.5=1	Approved By T.B.
decimal ±.5 (.020)	Title SIX "C" CELL HOLDER		
Fractional ± .8 (.030)	Date 5/06/06	Drawing Number BH26CW	
Angular ± 3°			