



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/26/03	A	CHANGED MATERIAL SPECIFICATION	T.B.	B.S.	

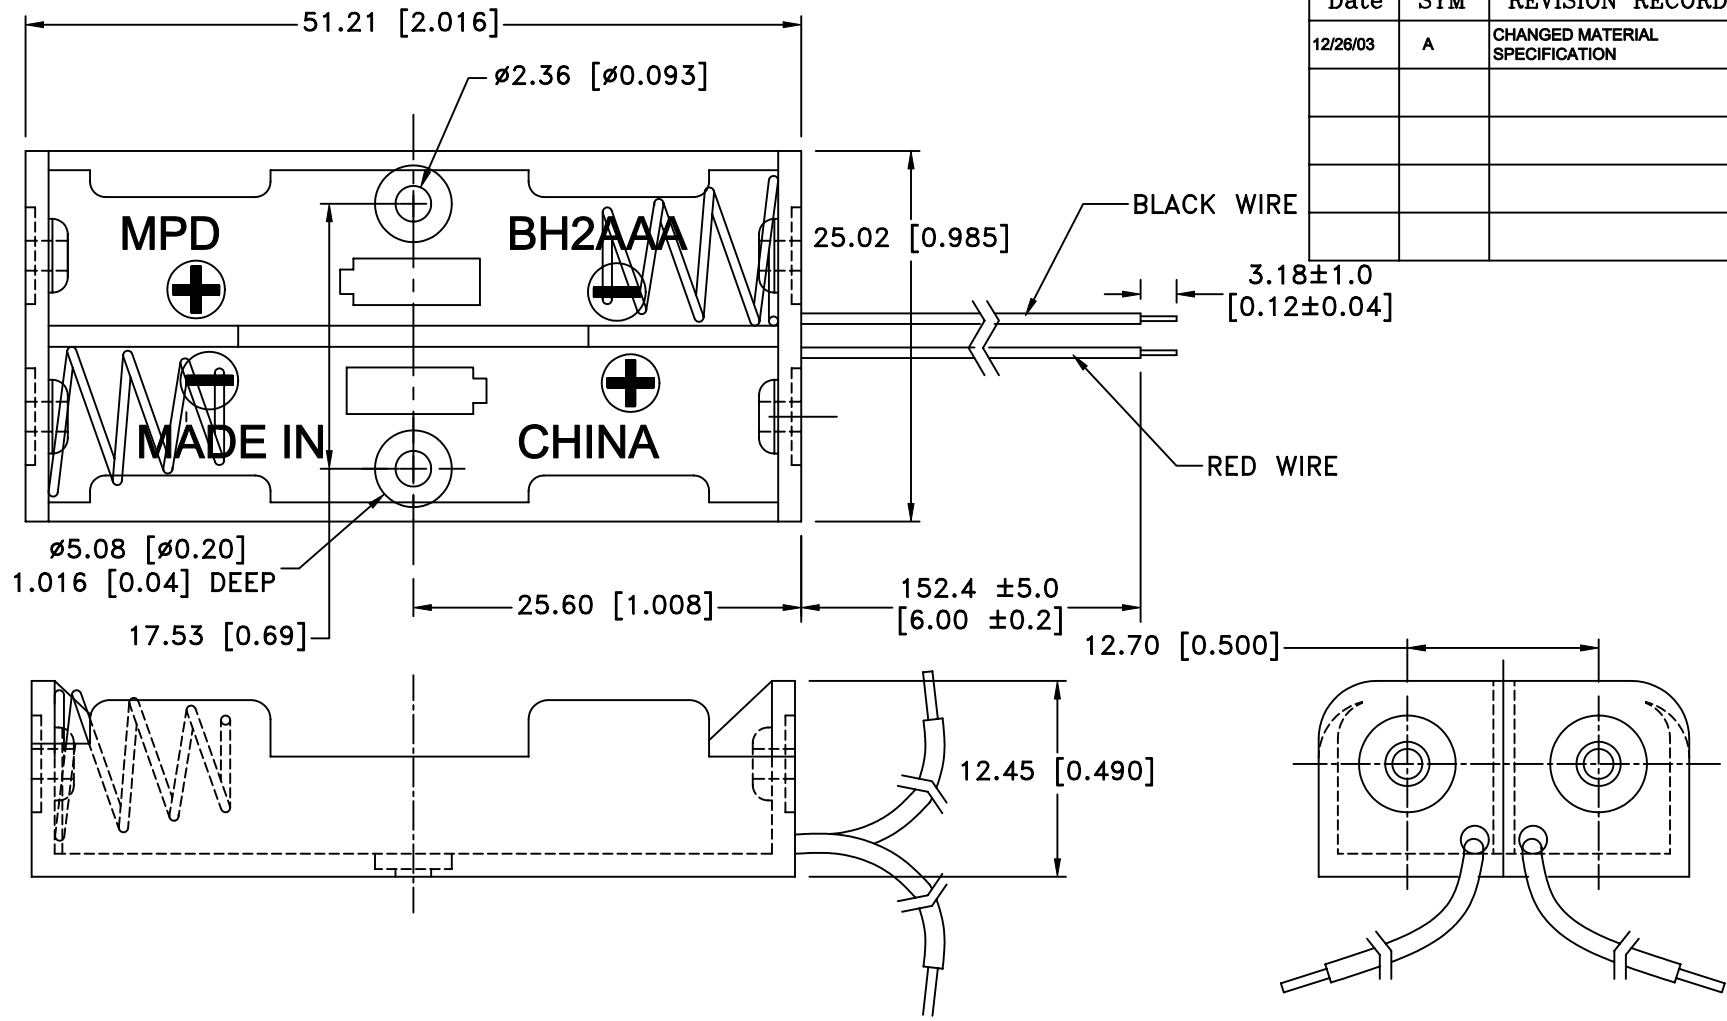

NOTES:

- 1. MATERIAL:**
HOUSING : HIGH IMPACT NYLON 66, HALOGEN AND PHOSPHOR FREE, UL94V-0, UL FILE NO. E48285
RIVETS: BRASS, NICKLE PLATED.
SPRING: 302 STAINLESS STEEL, NICKLE PLATED.
WIRES: 24AWG, RED - POSITIVE AND BLACK - NEGATIVE
TEMPERATURE RANGE: -40°C TO +140°C
RESISTANT TO SOLVENTS, COMMON OILS AND REFRIGERANTS

MOUNTING INSTRUCTION:
 USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
decimal ±.5 (.020)		Approved By T.B.	
Fractional ± .8 (.030)	Title TWO "AAA" CELL HOLDER		
Angular ± 3°	Date 12/26/03	Drawing Number BH2AAAW	