



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/12/05	A	ADDED "ROHS COMPLIANT"	T.B.		B.S.
3/18/06	B	UPDATED MATERIAL SPEC.	T.B.		B.S.
5/06/06	C	ADDED CONTACT RESI. INFO.	T.B.		B.S.

ORDERING CODE BH2C

L-Solder Lugs  
W-(6") Wire Leads  
SF-9Volt type snaps  
B- Bump plates

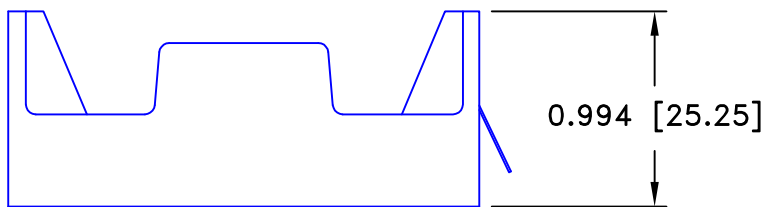


Solder Lugs shown

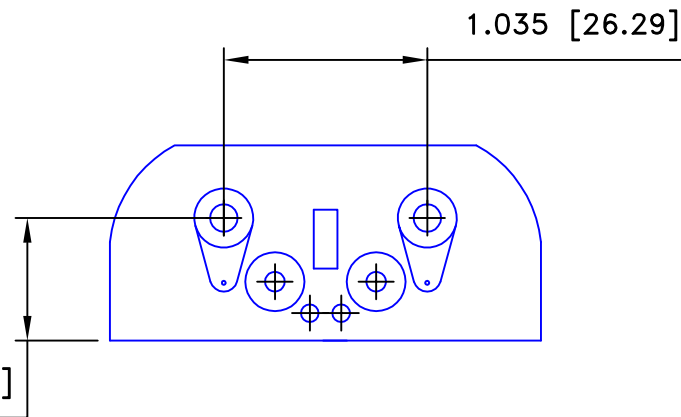

### SPECIFICATIONS

Plastic material - Polypropylene  
Flammability Rating -UL94-HB, UL File NO. E216959  
Temperature Range: -10°C to +100°C  
Springs - Nickel Plated Spring Steel  
Wire - 26 AWG, UL1007, CSA  
Rivets - Brass, Nickel Plated  
9Volt Snaps - Brass, Nickel Plated  
CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
EIA-540J000

ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale 1=1	Drawn By T.S.
			Approved By T.B.
decimal ±.5 (.020)	Title TWO "C" CELL HOLDER		
Fractional ± .8 (.030)	Date 5/06/06	Drawing Number BH2CL	