
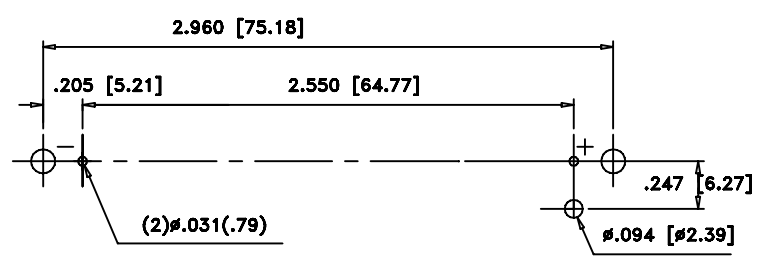
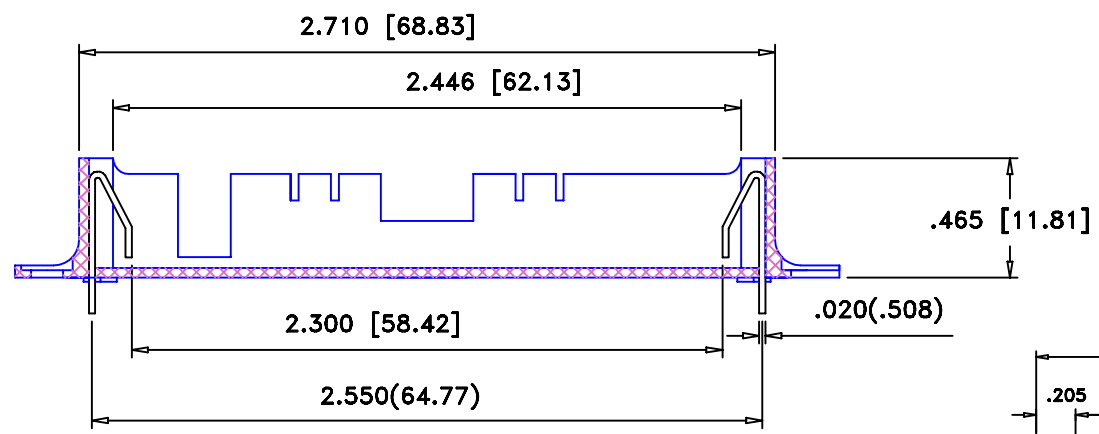
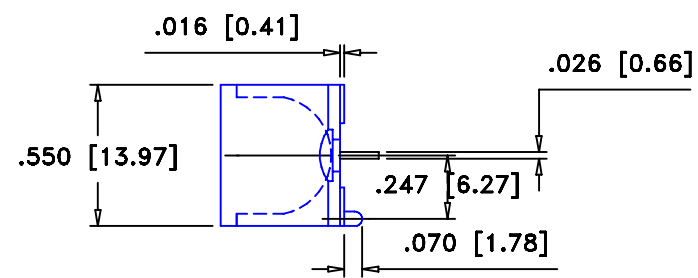



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

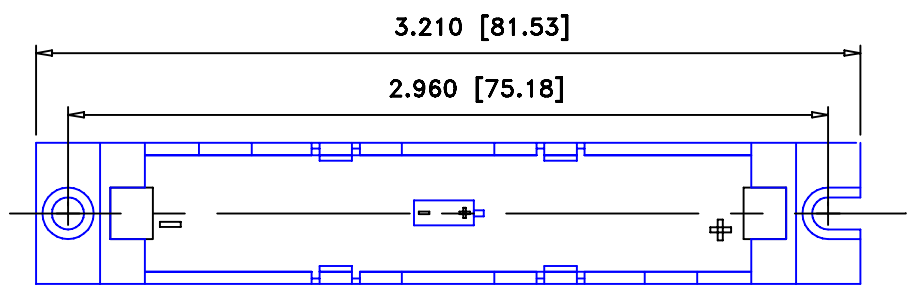

PCB LAYOUT

SPECIFICATION

HOLDER: SELF-EXTINGUISHING THERMOPLASTIC POLYESTER PBT, BLACK.
CONTACTS: #302 SPRING TEMPER STAINLESS STEEL, NICKEL PLATED .
FLAMMABILITY RATING, 94V-0, FILE NO. E88499(M)
DIELECTRIC STRENGTH: 560V/ MIL AT 25°C FOR 5 SEC.
TEMPERATURE RANGE: -55°C TO +180°C
RESISTANCE TO SOLVENTS: Xylene; Ethyl acetate; Butyl, Methyl & propyl alcohol;
Refrigerants; Heptane; Toluene.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By T.S.
decimal		2=1	Approved By T.B.
±.5 (.020)	Title		
Fractional	BH-2N LITHIUM BATTERY HOLDER		
± .8 (.030)	Date	Drawing Number	
Angular	2/17/01	BH-2N	
± 3°			