

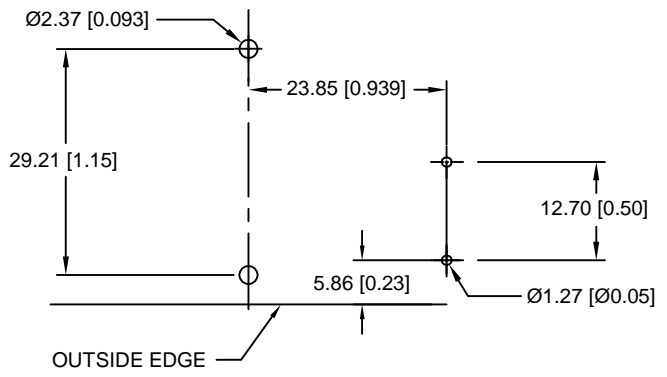
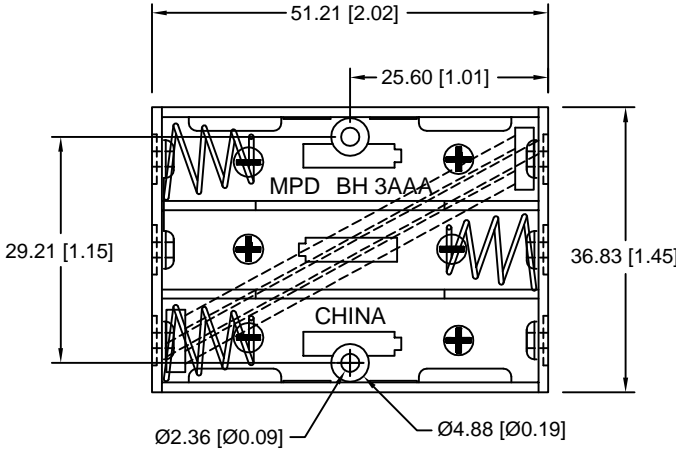


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
07/05/03	A	ADDED UL FILE #, MTL. INFO. FOR PC PIN	T.B.	B.S.	
07/25/03	B	CHANGED NOTES	T.B.	B.S.	
08/09/03	C	ADDED MOUNTING INSTRUCTION	T.B.	B.S.	
5/27/06	D	REDRAWN. ADDED "ROHS COMPLIANT". UPDATED NOTES	T.B.	B.S.	

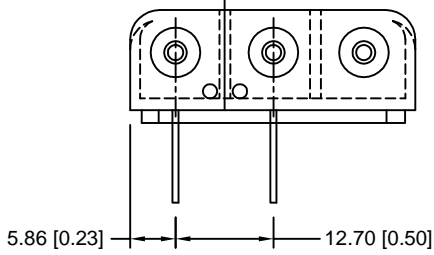


PCB LAYOUT

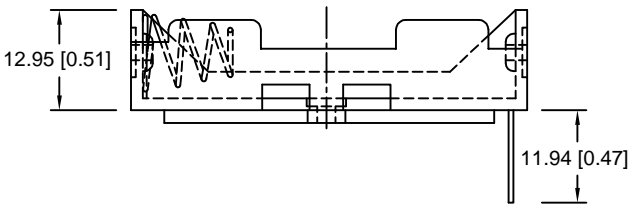

NOTES:
1. MATERIAL:
 HOUSING : HIGH IMPACT NYLON 66, HALOGEN AND PHOSPHOR FREE, UL94V-0, UL FILE NO. E48285
 RIVETS: BRASS, NICKLE PLATED.
 SPRING: 302 STAINLESS STEEL, NICKLE PLATED.
 CROSSOVER WIRE: 24AWG, UL1007, CSA, TR64
 PC PINS: 302 STAINLESS STEEL, NICKEL PLATED.
 TEMPERATURE RANGE: -40°C TO +140°C
 RESISTANT TO SOLVENTS, COMMON OILS AND REFRIGERANTS
 ROHS COMPLIANT

MOUNTING INSTRUCTION:
 USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title THREE "AAA" CELL HOLDER		
Fractional ± .8 (.030)		Date 5/27/06	Drawing Number BH3AAAPC
Angular ± 3°			