
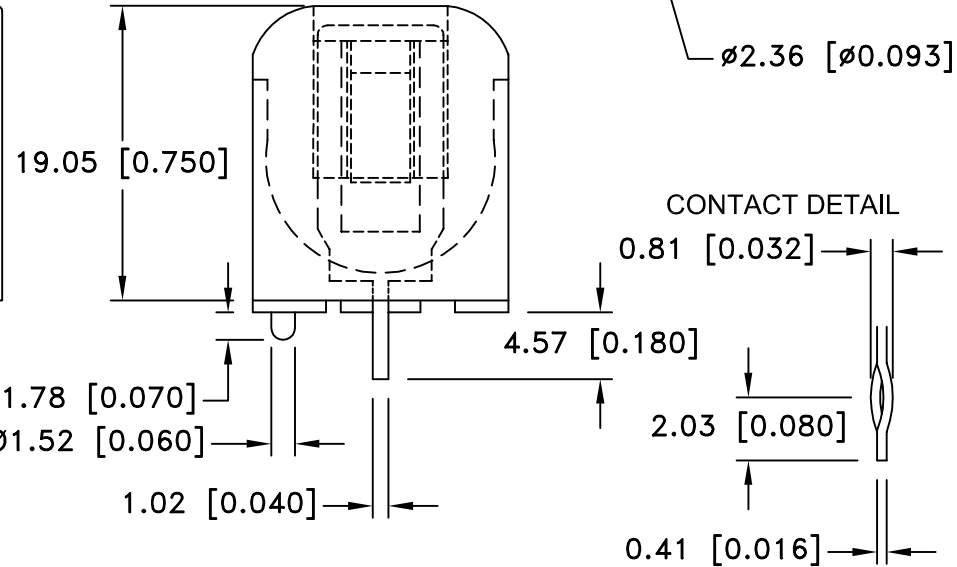
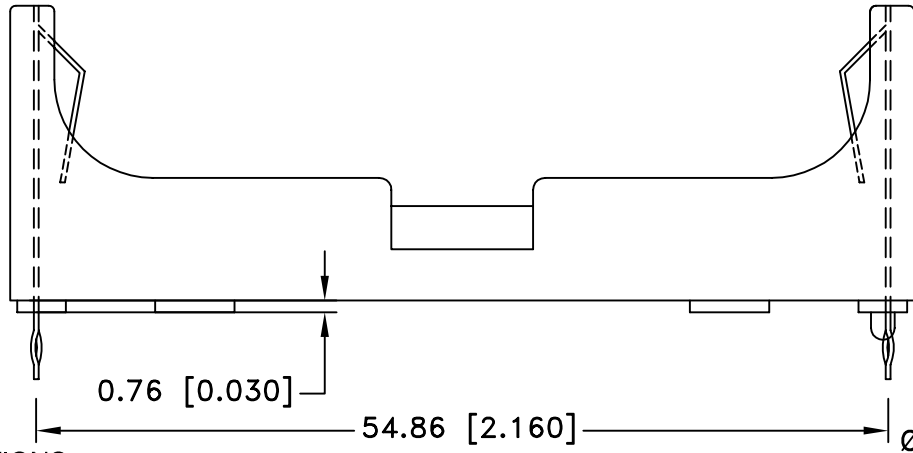



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/03/03	A	ALL DIM. CHANGED TO 3 DECIMAL POINT	T.B.	B.S.	
07/25/03	B	CHANGED MATL. SPEC. ADDED MATERIAL ON BOTH ENDS TO CLOSE IT DIM. CHANGED	T.B.	B.S.	
10/29/05	C	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

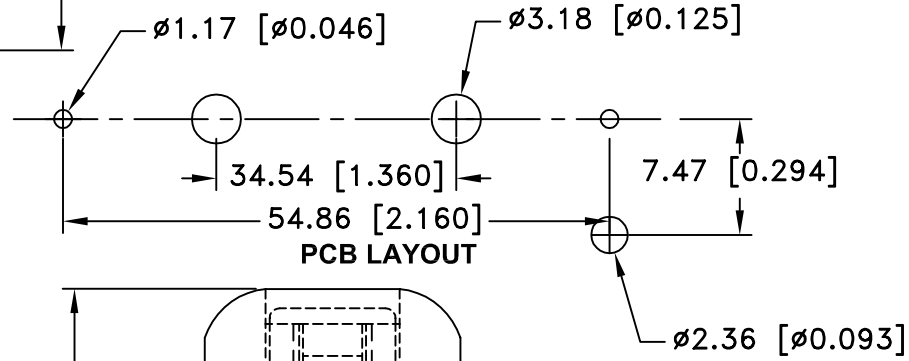

SPECIFICATIONS:

Holder Material: Black PBT, Flamability Rating: UL94V-0, FILE #E53829
 Contacts: 301 Spring temper stainless steel, nickel plated overall
 Dielectric strength: 560 Volts/mil at 25°C for 5 Sec.
 Temperature Range: -55°C to +180°C
 Vibration Test: 10-50-10 Hz swept in 60 seconds
 X,Y,Z direction: 1 hour each direction, No dislodgement of the cell or damage, No discontinuity over 10 micro-seconds
 Shock Test: Half sine wave acceleration 150g. 6 micro-seconds, 1 shock pulses each direction per axis, total of 6 pulses, No evidence of physical damage
 NOTES: Eyelet Stimpson style #A1883 0.110" OD x 0.190" Flange
 Flange Recess Ø0.203" x 0.090" Deep
 Accepts Standard 2-56 Machine Screws
 Accessories: BI-UM-3-4, Insulator
 ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title AA HOLDER		
Fractional ± .8 (.030)		Date 10/29/05	Drawing Number BHAA-3
Angular ± 3°			