

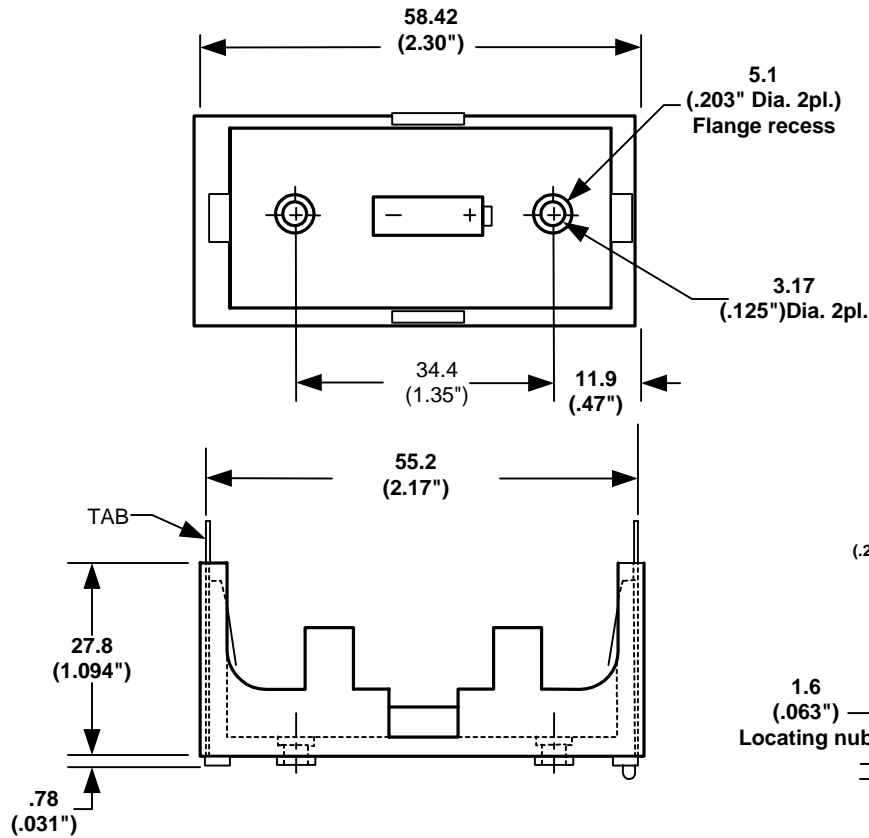


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

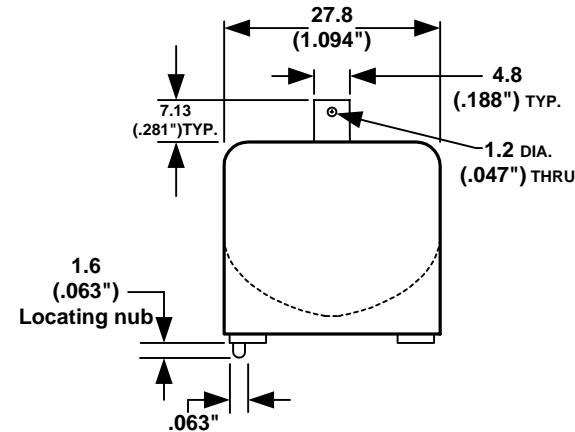

Standard Pc Version P.C. Board Hole layout

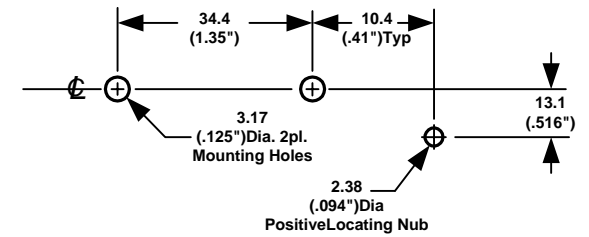

SPECIFICATIONS

Material:

Holder
 Flammability Rating
 Dielectric Strength
 Temperature Range
 Resistance to Solvent

Self extinguishing thermoplastic, PBT, black
 UL94 V-O, File No. E41797
 560 volts/mil at 25 °C for 5 sec.
 -55 °C to 140 °C.
 Xylene, Ethyl, Butyl, Methyl, Propyl alcohol,
 Ethyl acetate, Refrigerants, Heptane & Toluene.
 302 Spring Tempered Stainless Steel Nickel Plated
 20.7 Grams

Contacts
 Weight


NOTE:

Eyelet Stimpson Style # A1883 .110"OD. x .190"flange
 Flange recess .203" Dia. X .090" deep
 Accepts standard 2-56 machine screws
 .188 Tab accepts AMP Faston #640917-1 or Equal

Accessories:

BI - UM - 1 - 2 Insulator,
 BHC - POLZ - KEY Polarized Key

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL	+	SCALE	DRAWN BY s.c.
+ .5 (.020)	-	-----	APPROVED BY
FRACTIONAL	TITLE		
+ .8 (.030)	"C" CELL BATTERY HOLDER		
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	11/09/02	BHCT	
-			