
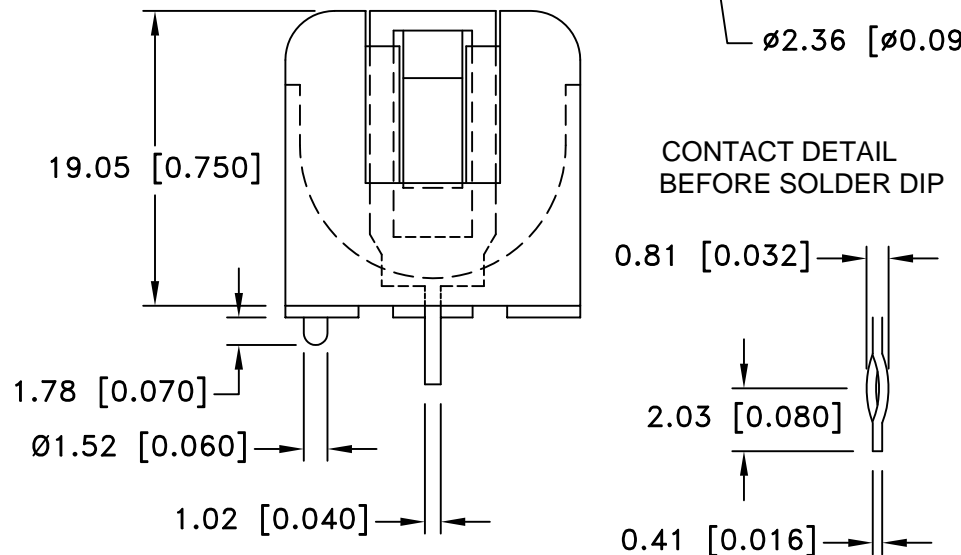



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/09/07	A	REDRAWN DIM. 18.26 WAS 18.03	T.B.	B.S.	
12/01/07	B	REMOVED "SOLDER DIPPED PCB TAILS"	T.B.	B.S.	

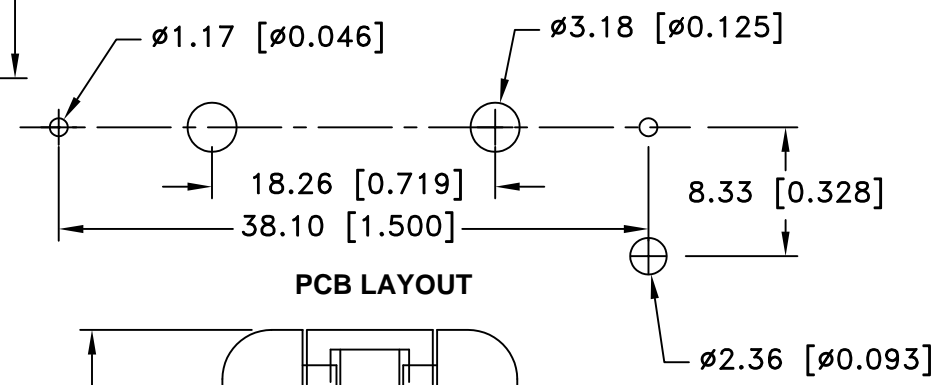

**SPECIFICATIONS:**  
 HOLDER MATERIAL: SELF EXTINGUISHING THERMOPLASTIC,  
 BLACK PBT  
 FLAMABILITY RATING:UL94V-0, FILE #E53829  
 CONTACTS: 301 SPRING TEMPER STAINLESS STEEL, NICKLE  
 PLATED OVERALL  
 DIELECTRIC STRENGTH: 560 VOLTS/MIL AT 25°C FOR 5 SEC.  
 TEMPERATURE RANGE: -55°C TO +180°C  
 RESISTANCE TO SOLVENTS: XYLENE, ETHYL , BUTYL, MRTHYL,  
 PROPYL ALCOHOL, ETHYL ACETATE,  
 HEPTANE, TOLUENE, REFRIGERANT

**NOTES:**  
 EYELET STIMPSON STYLE#A1883 0.110" OD x 0.190" FLANGE  
 FLANGE RECESS Ø0.203" x 0.090" DEEP  
 ACCEPTS STANDARD 2-56 MACHINE SCREWS

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title 2/3A BATTERY HOLDER, PCB MOUNTING		
Fractional ± .8 (.030)		Date 12/01/07	Drawing Number BH2/3A
Angular ± 3°			