



Valve Regulated Lead-Acid Rechargeable Battery




BP2.3-12

The battery is constructed by plates, separators, safety valves and container. Since the electrolyte is held by a glass-mat separator and plates, the battery can be used in any direction and position without leakage.

PERFORMANCE SPECIFICATIONS


Nominal Voltage(V).....	12 volts(6cells in series)
Nominal Capacity(Ah)	
20 hour rate F.V.(1.75V/cell) (115mA to 10.50volts)	2.3 Ah
10 hour rate F.V.(1.75V/cell) (219mA to 10.50volts)	2.19Ah
5 hour rate F.V.(1.75V/cell) (391mA to 10.50volts)	1.96Ah
1 hour rate F.V.(1.55V/cell)(1380mA to 9.30volts).....	1.38Ah
Approximate Weight.....	940g(2.07 lbs.)
Terminal	
Standard.....	T1
Internal Resistance (Fully Charged Battery).....	<75mΩ
Maximum Discharge Current For 5 sec.(A).....	34.5A
Maximum Charge Current(A).....	0.69A
Ambient Temperature	
Charge.....	0°C(32°F)~40°C(104°F)
Discharge.....	-20°C(-4°F)~50°C(122°F)
Storage.....	-20°C(-4°F)~40°C(104°F)
Vibration test:	
Frequency: 16.7Hz	
Amplitude: 4mm	
Vibrate the battery horizontally or vertically for 60 minutes. The battery have no abnormality.	
Case.....	ABS
Dimension(mm/inch)	
Length ±1.5mm.....	178/7.01
Width ±1.5mm.....	34/1.34
Container Height ±1.5mm.....	60/2.36
Total Height ±2mm.....	65/2.56
Application.....	UPS, Video Camcorders.

BP2.3-12 Battery discharge characteristics (25°C/77°F)

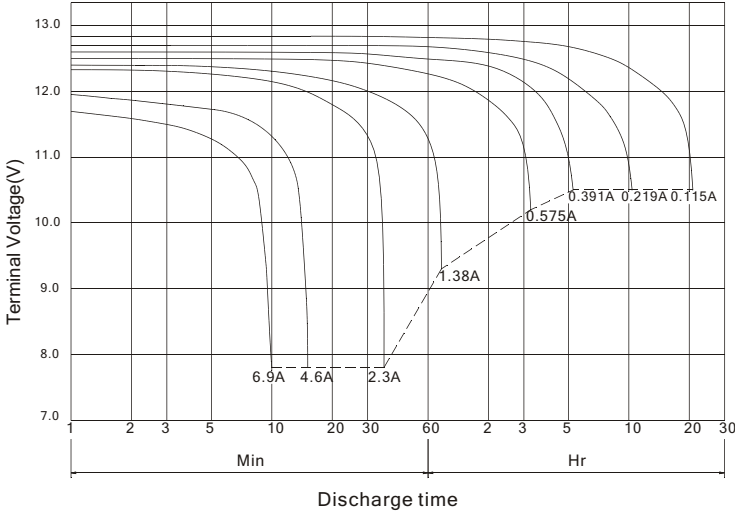


Battery Charging Characteristics

(Typical example of the charge characteristics for the standby use)

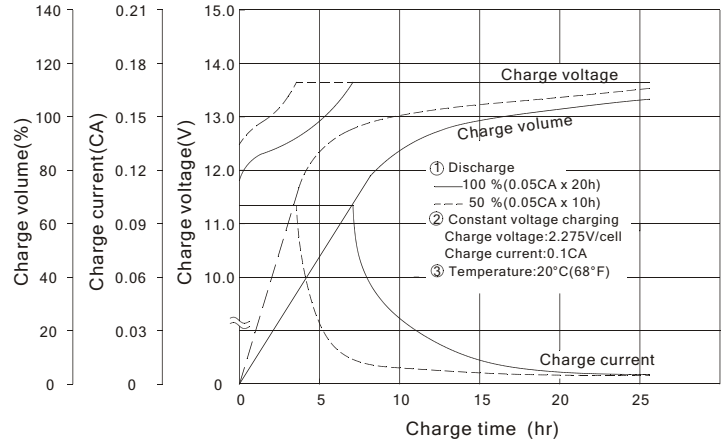



Effect of temperature on long term float life

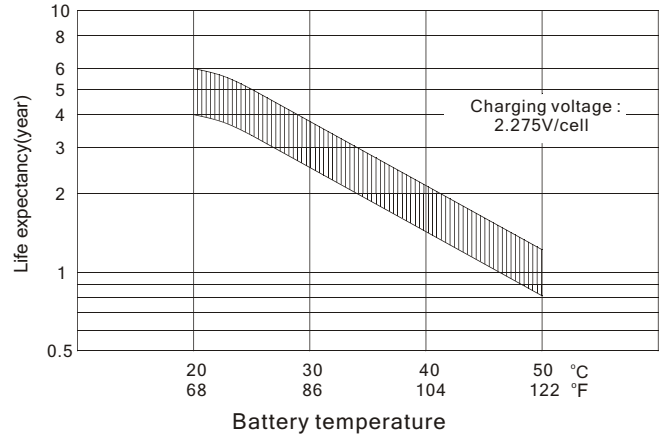

Charging Procedure


Application	Charging method	Charging Voltage at 20°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C/cell)	Max. charging current (CA)	Charging time 0.1CA, 20°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power Source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	

OUTER DIMENSIONS

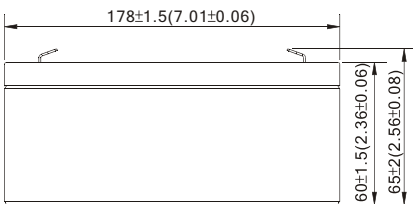


TERMINAL TYPE mm(inch)

Terminal T1




34±1.5(1.34±0.06)



Constant power discharge characteristics at 25°C/77°F

Final Voltage	Discharge time								
	5Min	10Min	15Min	30Min	1Hr	3Hr	5Hr	10Hr	20Hr
	Battery output power(W)								
10.80V	83.2	61.2	49.1	29.2	16.74	6.70	4.62	2.58	1.35
10.50V	96.2	66.3	51.3	30.3	17.24	6.84	4.69	2.62	1.38
10.20V	102.3	68.7	52.9	31.0	17.55	6.90	4.72	2.64	1.39
9.90V	106.9	70.4	54.1	31.4	17.76	6.95	4.73	2.64	1.39
9.60V	110.4	71.8	55.2	31.7	17.94	6.99	4.75	2.64	1.39

TERMINAL POSITION



B.B. BATTERY CO., LTD.

Web Site: <http://www.bb-battery.com>

USA:
 B&B BATTERY(USA) INC.
 6415 RANDOLPH ST.COMMERCE,
 CA,90040 U.S.A.
 TEL:1-323-278-1900.1-800-278-8599
 FAX:1-323-278-1268
 E-Mail:sales@bb-battery.com

EUROPE:
 B&B BATTERY(EUROPE) B.V.
 3 WIJNGAARDVELD, 9300 AALST,BELGIUM
 TEL:(00)32-53781567
 FAX:(00)32-53781567
 E-Mail:hansdevriese@bb-battery.com

CHINA FACTORY:
 B.B. BATTERY CO., LTD.
 CHENG DONG TRIAL AREA,HUANG GANG,
 RAOPING, GUANG DONG,CHINA,515700
 TEL:86-768-7601001-2
 FAX:86-768-7601469
 E-Mail:maggy@bb-battery.com

HONG KONG:
 NATIONAL TRADING LTD.
 TEL:852-2301-3800
 FAX:852-2739-1182
 E-Mail:bbhk@hkstar.com

JAPAN:
 B&B BATTERY(JAPAN) CO., LTD.
 1375-11 NARAHARA-MACHI,HACHIOJI,
 TOKYO 193-0803,JAPAN.
 TEL:81-426-25-6375
 FAX:81-426-25-6375
 E-Mail:miyata@bb-battery.com

TAIWAN:
 B.B. BATTERY(TAIWAN) CO., LTD.
 TEL:886-6-502-5150
 FAX:886-6-589-8087
 E-Mail:maggy@bb-battery.com

