

3 A LOW Vf Schottky Barrier Rectifier

DESCRIPTION

This UPS340e3 in the Powermite3[®] package is a high efficiency Schottky rectifier that is also RoHS compliant offering high current/power capabilities previously found only in much larger packages. They are ideal for SMD applications that operate at high frequencies. In addition to its size advantages, the Powermite3[®] package includes a full metallic bottom that eliminates the possibility of solder flux entrapment during assembly and a unique locking tab act as an efficient heat path to the heat-sink mounting. Its innovative design makes this device ideal for use with automatic insertion equipment.

KEY FEATURES

- Very low thermal resistance package
- RoHS Compliant with e3 suffix part number
- Guard-ring-die construction for transient protection
- Efficient heat path with Integral locking bottom metal tab
- Low forward voltage
- Full metallic bottom eliminates flux entrapment
 - Compatible with automatic insertion
- Low profile-maximum height of 1mm


IMPORTANT: For the most current data, consult *MICROSEM* is website: http://www.microsemi.com

ABSOLUTE MAXIMUM RATINGS AT 25° C (UNLESS OTHERWISE SPECIFIED)					
Rating	Symbol	Value	Unit		
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	40	v		
RMS Reverse Voltage	V _{R (RMS)}	28	V		
Average Rectified Output Current	Ι _ο	3	А		
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine wave Superimposed on Rated Load@ T _c =90 °C	I _{FSM}	50	А		
Storage Temperature	T_{STG}	-55 to +150	°C		
Junction Temperature	TJ	-55 to +125	°C		

THERMAL CHARACTERISTICS

Thermal Resistance				
Junction-to-case (bottom)	R _{0JC}	3.2	°C/ Watt	
Junction to ambient (1)	R _{0JA}	65	°C/ Watt	
(1) When mounted on FR-4 PC board using 2 oz copper with recommended minimum foot print				

Powermite 3[™]

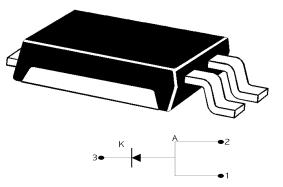

APPLICATIONS/BENEFITS						
 Switching and Regulating Power Supplies. Silicon Schottky (hot carrier) rectifier for minimal reverse voltage recovery Elimination of reverse-recovery oscillations to reduce need for EMI filtering Charge Pump Circuits Reduces reverse recovery loss with low I_{RM} Small foot print 						
190 X 270 mils (1:1 Actual size) See mounting pad details on pg 3						
MECHANICAL & PACKAGING						
 CASE: Void-free transfer molded thermosetting epoxy compound meeting UL94V-0 						
 FINISH: Annealed matte-Tin plating over 						


- FINISH: Annealed matte-Tin plating over copper and readily solderable per MIL-STD-750 method 2026 (consult factory for Tin-Lead plating)
- POLARITY: See figure (left)
- MARKING: S340•
- WEIGHT: 0.072 gram (approx.)
- Package dimension on last page
- Tape & Reel option: 16 mm tape per Standard EIA-481-B, 5000 on 13" reel



3 A LOW Vf Schottky Barrier Rectifier

ELECTRICAL PARAMETERS @ 25°C (unless otherwise specified)						
Parameter	Symbol	Conditions	Min	Тур.	Max	Units
Forward Voltage (Note 1)		$I_F = 3 A$, $T_j = 25 °C$		0.46	0.50	
	V _F	$I_F = 3 A$, $T_j = 125 °C$ $I_F = 6 A$, $T_j = 25 °C$		0.40 0.57	0.44 0.61	V
Reverse Break Down Voltage (Note 1)	V _{BR}	$I_F = 6 \text{ A}, T_i = 125 \text{ °C}$ $I_R = 0.5 \text{ mA}$	40	0.54	0.58	V
Reverse Current (Note1)	I _R	V _R = 40V, T _j = 25 °C V _R = 40V, T _j =100 °C		15 10	500 20	uA mA
Capacitance	CT	V _R = 4 V; f = 1 MH _Z		180		pF


Note: 1 Short duration test pulse used to minimize self - heating effect.

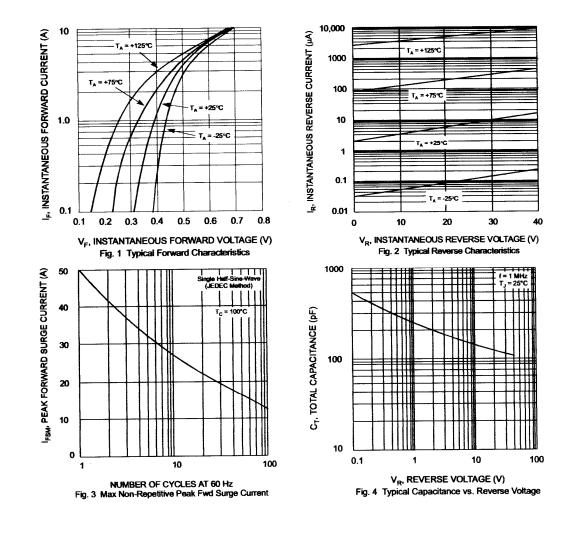

UPS340e3




3 A LOW Vf Schottky Barrier Rectifier

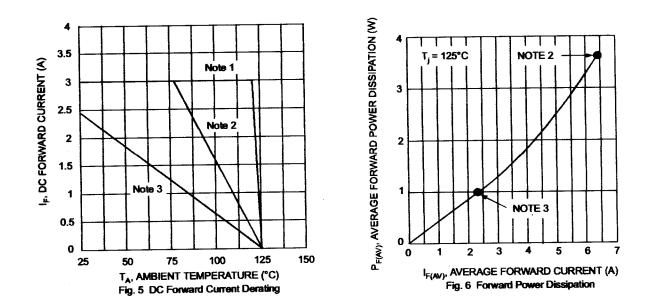

- Notes: 1. $T_A = T_{SOLDERING POINT}$, $R_{\Theta JS} = 3.2^{\circ} \text{ C/W}$ $R_{\Theta SA} = 0^{\circ} \text{ C/W}$. 2. Device mounted on GETEK substrate, 2" x 2", 2 oz. copper, double-sided, cathode pad dimensions 0.75" x 1.0", anode pad dimensions 0.25" x 1.0". R_{OJA} in range of 20-40° C/W.
 - 3. Device mounted on FRA-4 substrate, 2" x 2", 2 oz. copper, single-sided, pad layout $R_{\Theta JA}$ in range of 65° C/W. See mounting pad below.

MOUNTING PAD DIMENSIONS (inches)

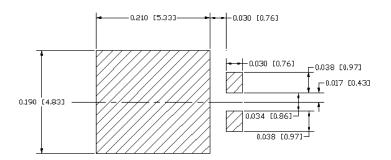


UPS340e3




3 A LOW Vf Schottky Barrier Rectifier

TAPE & REEL

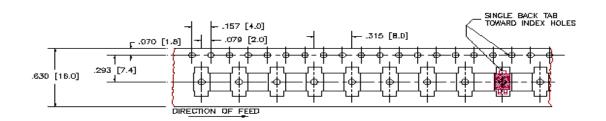


13 INCH REEL

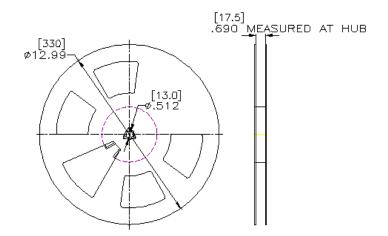




3 A LOW Vf Schottky Barrier Rectifier

PACKAGE DIMENSIONS

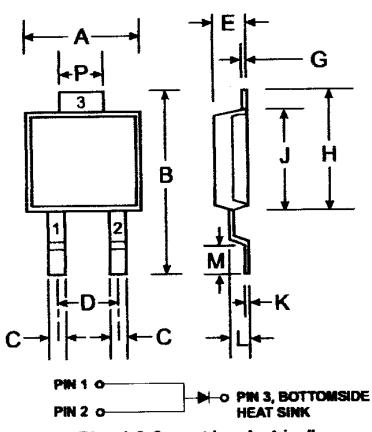



POWERMITE®3				
Dim	Min Max			
•	4.03	4.09		
B	6.40	6.61		
С	.889 NOM			
D	1.83 NOM			
E	1.10	1.14		
G	.178 NOM			
H	5.01 5.17			
J	4.37	4.43		
К	.178 NOM			
L	.71	.77		
M	.36	.46		
Р	1.73	1.83		
All Dimensions in mm				



3 A LOW Vf Schottky Barrier Rectifier

•	NOTES:	www. <i>Microsemi</i> .com
	NOTES	UPS340e3