

[<-- back](#)

MODEL TL-2100


International size reference : AA, ER14505

TECHNICAL DATA

(Typical Values @+25°C for batteries stored for one year or less)


| | |
|---------------------------------------|------------------|
| Nominal capacity @ 2mA TO 2V | 2.1Ah |
| Rated voltage | 3.6V |
| Maximum continuous current | 100mA |
| Maximum pulse current capability | 200mA |
| Rated 1 sec. pulse capability (to 3V) | 40mA |
| Weight | 17.4g (0.615oz.) |
| Operating temperature range | -55°C to +85°C |

U.L. Component recognition MH 12193

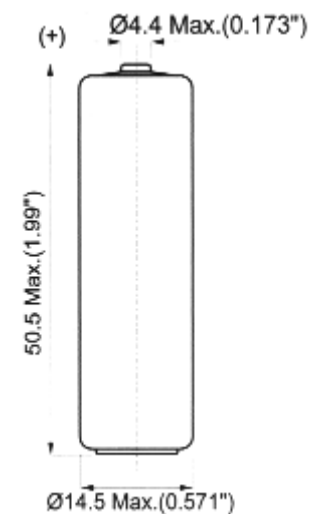


AVAILABLE TERMINATIONS

| | |
|--------------|-------------|
| SUFFIX- /S | STANDARD |
| SUFFIX- /P | AXIAL PINS |
| SUFFIX- /T | SOLDER TABS |
| SUFFIX- /PT2 | RADIAL PINS |

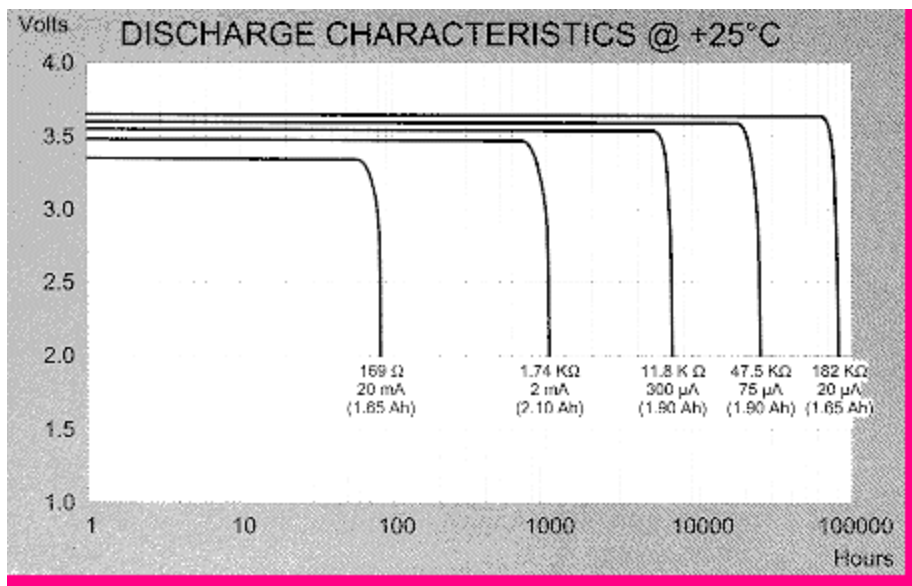

| | |
|-------------------|-------------------|
| SUFFIX- /PT/TP | POLARIZED TABS |
|-------------------|-------------------|

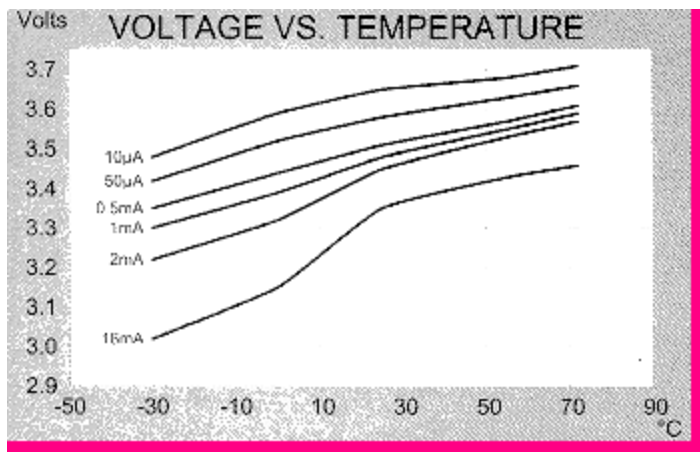

LITHIUM XTRA

Note: Any representations in this website concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

