

[<-- back](#)

## MODEL TL-5920


International size reference :C, ER26500

### TECHNICAL DATA

(Typical Values @+25°C for batteries stored for one year or less)




Nominal capacity @ 4 mA TO 2V	8.5Ah
Rated voltage	3.6V
Maximum continuous current	230mA
Maximum pulse current capability	400mA
Rated 1 sec. pulse capability (to 3V)	60mA
Weight	50.5g (1.78 oz.)
Operating temperature range	-55°C to +85°C

U.L. Component recognition MH 12193

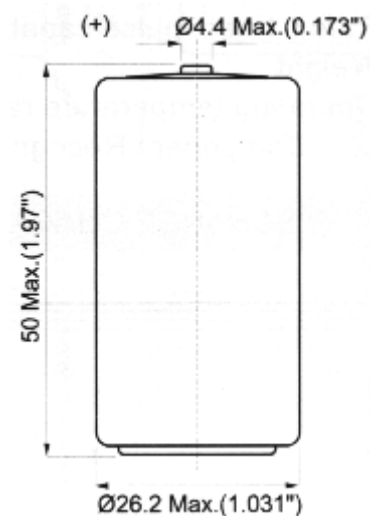

### AVAILABLE TERMINATION

SUFFIX- /S	STANDARD
SUFFIX- /T	SOLDER TABS

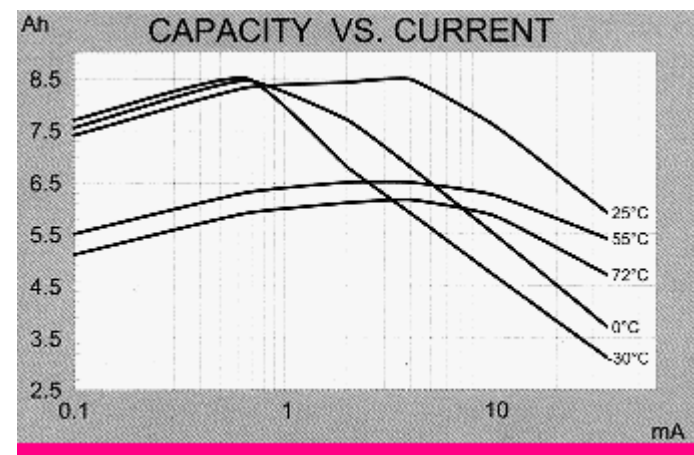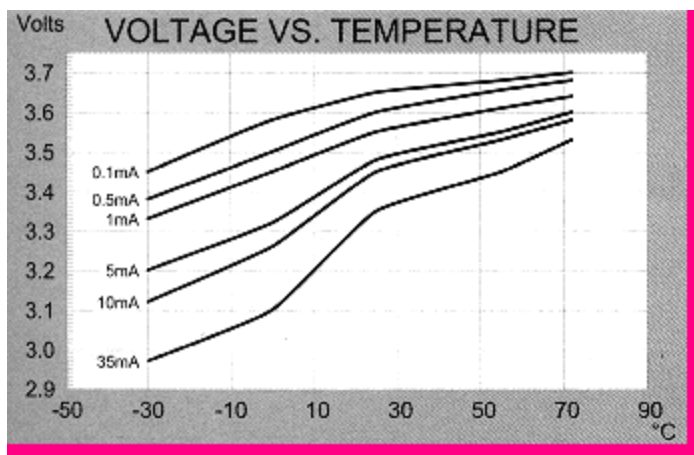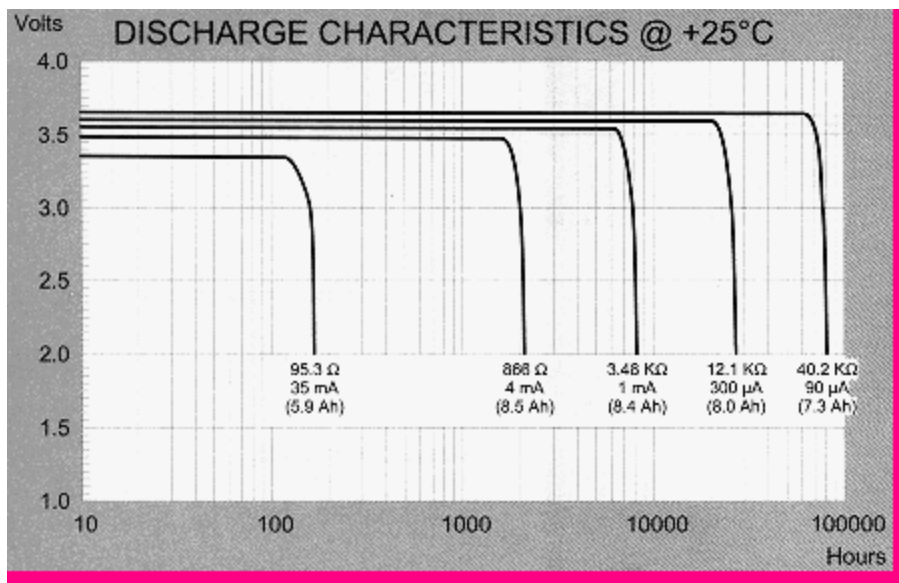

**LITHIUM XTRA**

Note: Any representations in this website concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

