

[<-- back](#)

MODEL TL-2300


International size reference :D, ER32L615

TECHNICAL DATA

(Typical Values @+25°C for batteries stored for one year or less)




| | |
|---------------------------------------|-----------------|
| Nominal capacity @ 5mA TO 2V | 16.5Ah |
| Rated voltage | 3.6V |
| Maximum continuous current | 230mA |
| Maximum pulse current capability | 500mA |
| Rated 1 sec. pulse capability (to 3V) | 100mA |
| Weight | 92.5g (3.26oz.) |
| Operating temperature range | -55°C to +85°C |

U.L. Component recognition MH 12193

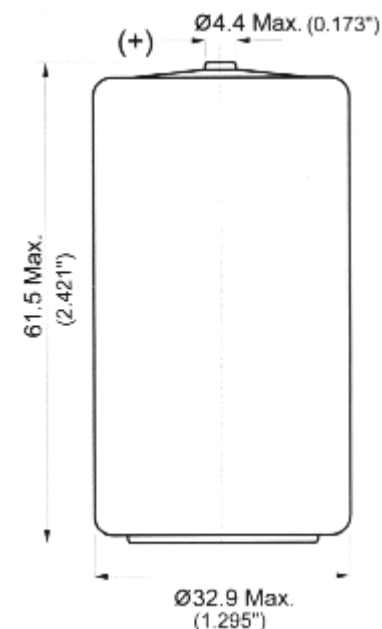

AVAILABLE TERMINATIONS

| | |
|------------|-------------|
| SUFFIX- /S | STANDARD |
| SUFFIX- /T | SOLDER TABS |

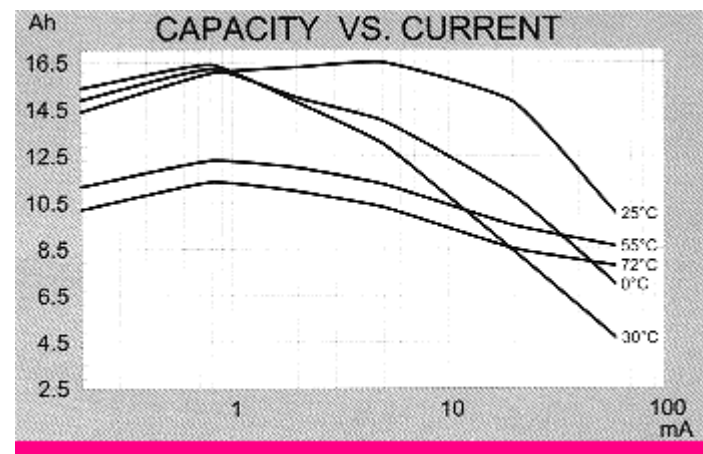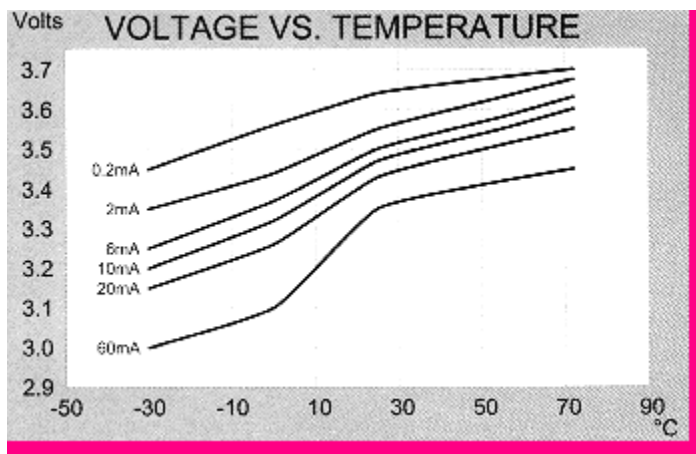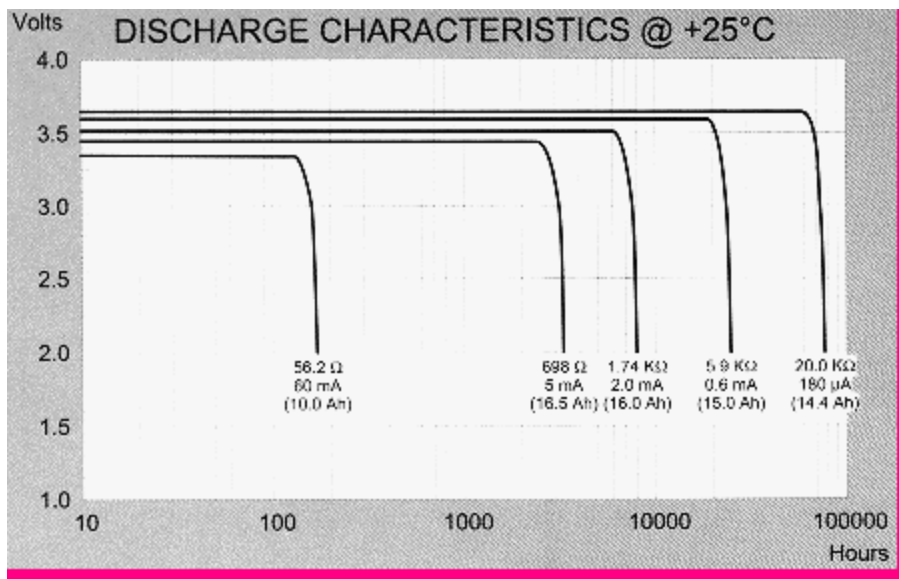

LITHIUM XTRA

Note: Any representations in this website concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

