


NPN Silicon RF Transistor*

- For low-distortion broadband output amplifier stages in antenna and telecommunication systems up to 2 GHz at collector currents from 120 mA to 250 mA
- Power amplifiers for DECT and PCN systems
- Integrated emitter ballast resistor
- $f_T = 5.5$ GHz
- Pb-free (RoHS compliant) package¹⁾
- Qualified according AEC Q101

* Short term description

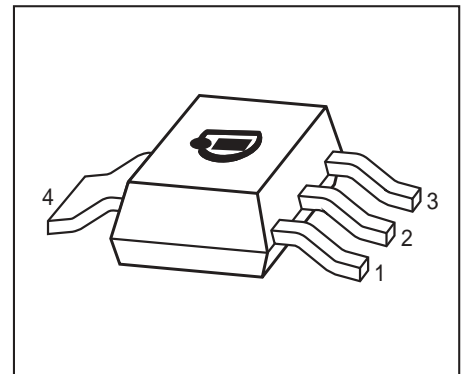

ESD (Electrostatic discharge) sensitive device, observe handling precaution!

| Type | Marking | Pin Configuration | | | | | | Package |
|--------|---------|-------------------|-------|-------|-------|---|---|---------|
| BFG235 | BFG235 | 1 = E | 2 = B | 3 = E | 4 = C | - | - | SOT223 |

Maximum Ratings

| Parameter | Symbol | Value | Unit |
|----------------------------------------------------------------------|-----------|-------------|------------------|
| Collector-emitter voltage | V_{CEO} | 15 | V |
| Collector-emitter voltage | V_{CES} | 25 | |
| Collector-base voltage | V_{CBO} | 25 | |
| Emitter-base voltage | V_{EBO} | 2 | |
| Collector current | I_C | 300 | mA |
| Base current | I_B | 40 | |
| Total power dissipation ²⁾ $T_S \leq 80^\circ\text{C}$ | P_{tot} | 2 | W |
| Junction temperature | T_j | 150 | $^\circ\text{C}$ |
| Ambient temperature | T_A | -65 ... 150 | |
| Storage temperature | T_{stg} | -65 ... 150 | |

¹Pb-containing package may be available upon special request

² T_S is measured on the collector lead at the soldering point to the pcb

Thermal Resistance

| Parameter | Symbol | Value | Unit |
|------------------------------------------|------------|-----------|------|
| Junction - soldering point ¹⁾ | R_{thJS} | ≤ 35 | K/W |

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Values | | | Unit |
|-----------|--------|--------|------|------|------|
| | | min. | typ. | max. | |

DC Characteristics

| | | | | | |
|-----------------------------------------------------------------------------------|---------------|----|-----|-----|---------------|
| Collector-emitter breakdown voltage $I_C = 1 \text{ mA}, I_B = 0$ | $V_{(BR)CEO}$ | 15 | - | - | V |
| Collector-emitter cutoff current $V_{CE} = 25 \text{ V}, V_{BE} = 0$ | I_{CES} | - | - | 200 | μA |
| Collector-base cutoff current $V_{CB} = 10 \text{ V}, I_E = 0$ | I_{CBO} | - | - | 100 | nA |
| Emitter-base cutoff current $V_{EB} = 1 \text{ V}, I_C = 0$ | I_{EBO} | - | - | 2 | μA |
| DC current gain- $I_C = 200 \text{ mA}, V_{CE} = 8 \text{ V}$, pulse measured | h_{FE} | 75 | 120 | 160 | - |

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance



Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Values | | | Unit |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------|------|------|------|
| | | min. | typ. | max. | |
| AC Characteristics (verified by random sampling) | | | | | |
| Transition frequency $I_C = 200\text{ mA}$, $V_{CE} = 8\text{ V}$, $f = 200\text{ MHz}$ | f_T | 4 | 5.5 | - | GHz |
| Collector-base capacitance $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$, $V_{BE} = 0$, emitter grounded | C_{cb} | - | 2.2 | 3 | pF |
| Collector emitter capacitance $V_{CE} = 10\text{ V}$, $f = 1\text{ MHz}$, $V_{BE} = 0$, base grounded | C_{ce} | - | 1.5 | - | |
| Emitter-base capacitance $V_{EB} = 0.5\text{ V}$, $f = 1\text{ MHz}$, $V_{CB} = 0$, collector grounded | C_{eb} | - | 14 | - | |
| Noise figure $I_C = 60\text{ mA}$, $V_{CE} = 8\text{ V}$, $Z_S = Z_{Sopt}$, $f = 900\text{ MHz}$ | F | - | 1.7 | - | dB |
| Power gain, maximum available ¹⁾ $I_C = 200\text{ mA}$, $V_{CE} = 8\text{ V}$, $Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}$, $f = 900\text{ MHz}$ | G_{ma} | - | 12.5 | - | |
| Transducer gain $I_C = 200\text{ mA}$, $V_{CE} = 8\text{ V}$, $Z_S = Z_L = 50\Omega$, $f = 900\text{ MHz}$ | $ S_{21e} ^2$ | - | 6.5 | - | dB |
| Third order intercept point at output $V_{CE} = 8\text{ V}$, $I_C = 200\text{ mA}$, $f = 900\text{ MHz}$, $Z_S = Z_L = 50\Omega$ | IP_3 | - | 33 | - | dBm |

¹⁾ $G_{ma} = |S_{21}/S_{12}| (k - (k^2 - 1)^{1/2})$


Total power dissipation $P_{tot} = f(T_S)$

Permissible Pulse Load $R_{thJS} = f(t_p)$

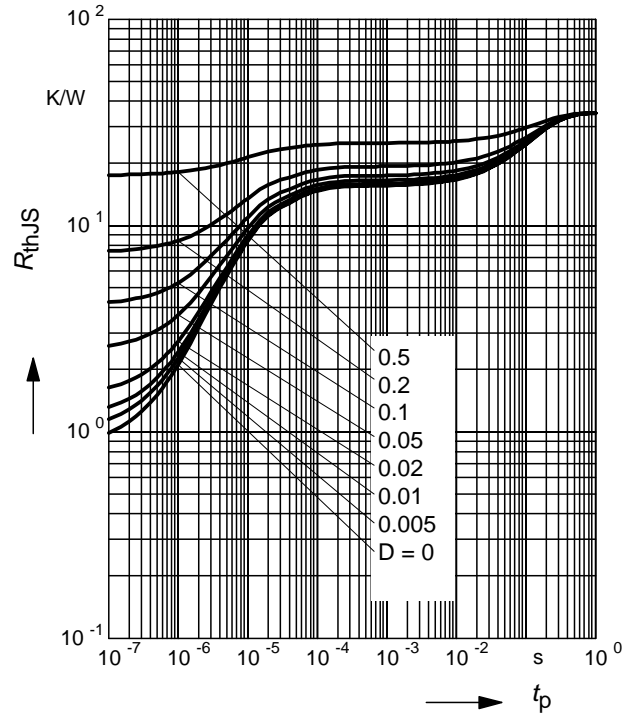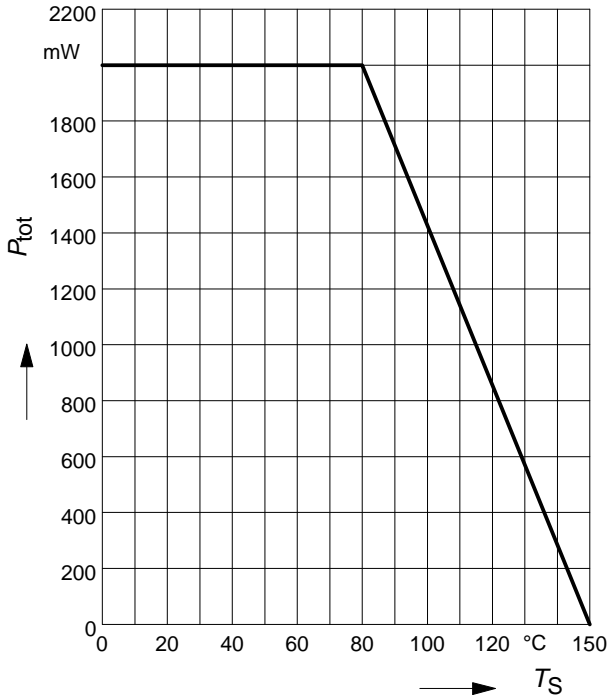


Permissible Pulse Load


$P_{totmax}/P_{totDC} = f(t_p)$

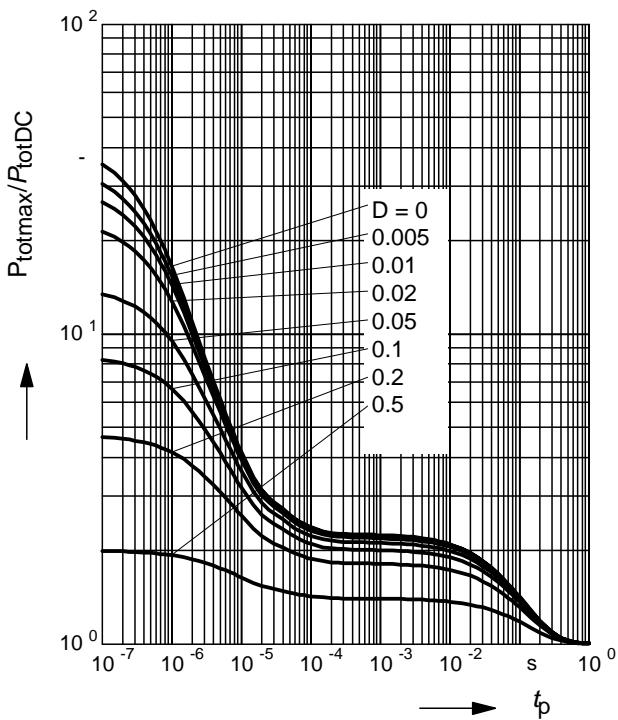


Package Outline

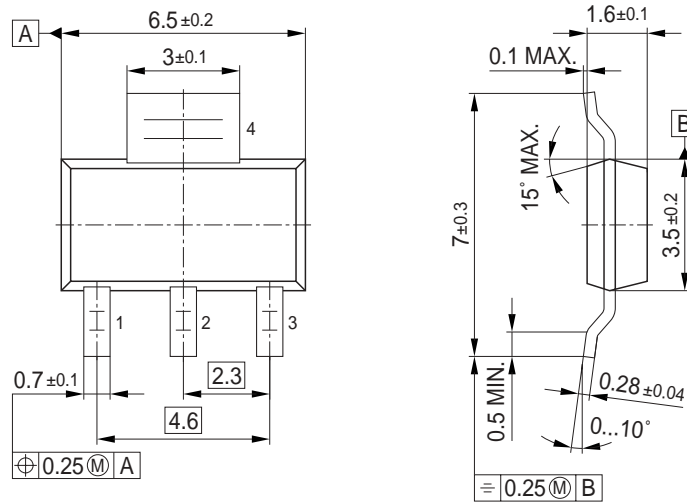

Foot Print

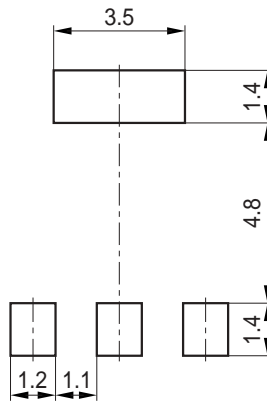


Marking Layout (Example)

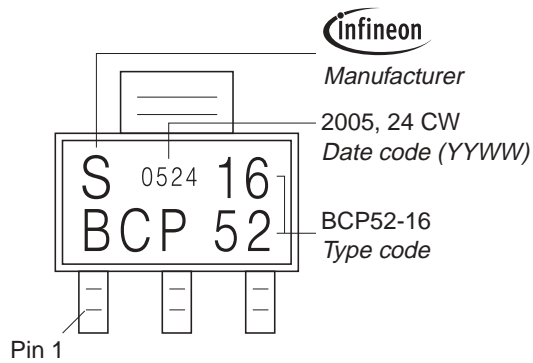

Packing

Reel $\varnothing 180 \text{ mm} = 1.000 \text{ Pieces/Reel}$
 Reel $\varnothing 330 \text{ mm} = 4.000 \text{ Pieces/Reel}$

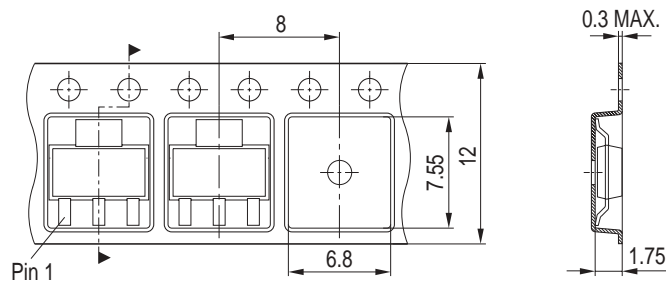

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

Attention please!

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.