


# Manganese Dioxide Lithium Cylindrical Batteries: Individual Specifications

## 2CR5


### ■ Dimensions(mm)

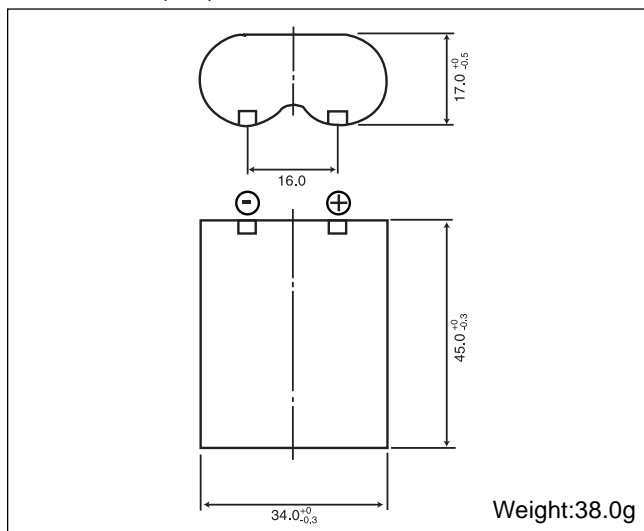

### ■ Specification

Nominal voltage (V)	6
Nominal capacity (mAh)	1,400
Continuous standard load (mA)	20
Operating temperature (C)	-40 ~ +70*


### ■ Temperature Characteristics

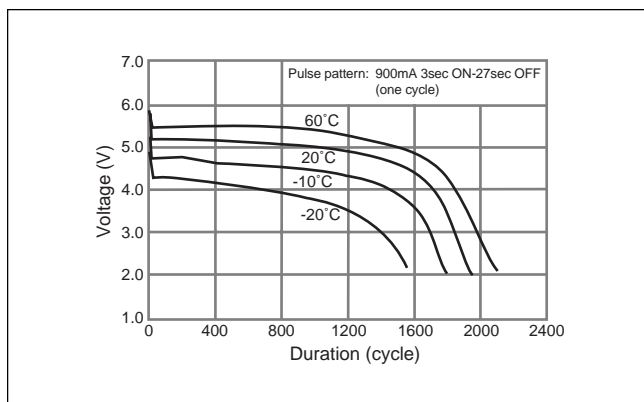

\* Please consult Panasonic for use below and above -20°C to +60°C

## CR-P2


### ■ Dimensions(mm)

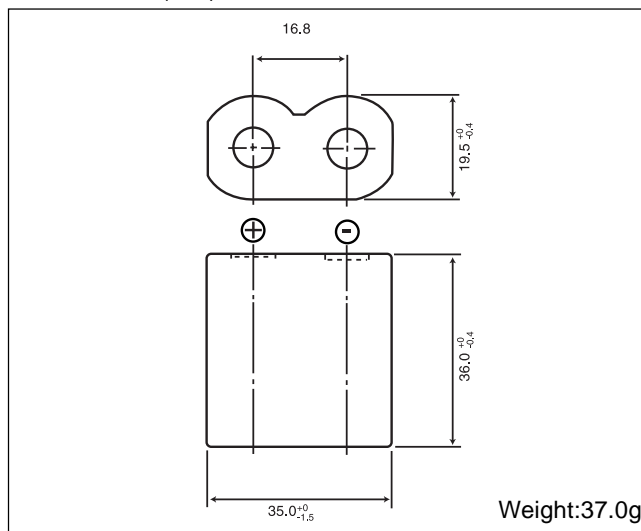

### ■ Specification

Nominal voltage (V)	6
Nominal capacity (mAh)	1,400
Continuous standard load (mA)	20
Operating temperature (C)	-40 ~ +70*

### ■ Temperature Characteristics

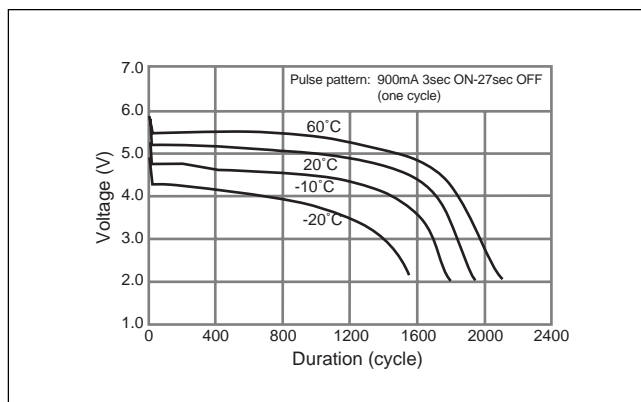

\* Please consult Panasonic for use below and above -20°C to +60°C