


SANYO

Cadnica

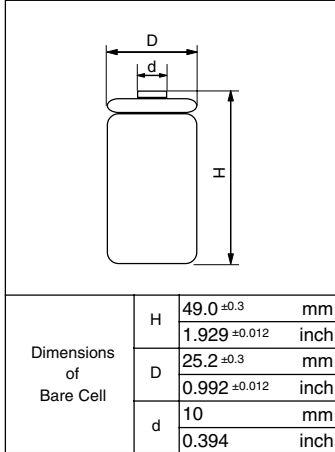


Cell Type KR-CH(3.0)

Specifications


| | | |
|---|-----------|--|
| Nominal Capacity | | 3000mAh |
| Nominal Voltage | | 1.2V |
| Charging Current | Trickle | 100mA |
| | Standard | 300mA |
| Charging Time | Trickle | above 48Hrs. |
| | Standard | 14 to 16Hrs. |
| Ambient Temperature | Charge | 0°C to +70°C [+32°F to 158°F] |
| | Discharge | -20°C to +70°C [-4°F to 158°F] |
| | Storage | -30°C to +70°C [-22°F to 158°F] |
| Internal Impedance (Av.) (at 50% discharge) | | 5.9mΩ (at 1000Hz) |
| Weight | | 78g/2.75oz |
| Dimensions(D)×(H) (with tube) | | 26.0 ⁰ _{-0.8} × 50.0 ⁰ _{-1.2} mm 1.02 ⁰ _{-0.03} × 1.97 ⁰ _{-0.05} inch |

Typical Characteristics


Charge

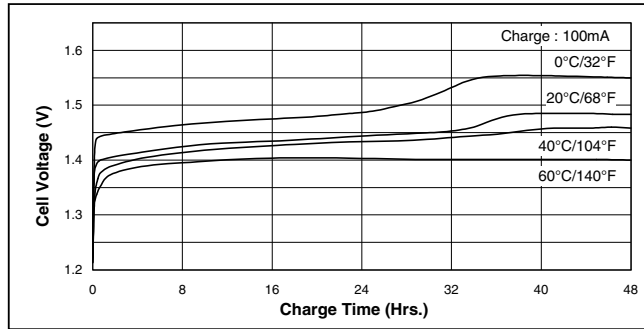


Discharge (at high rate)

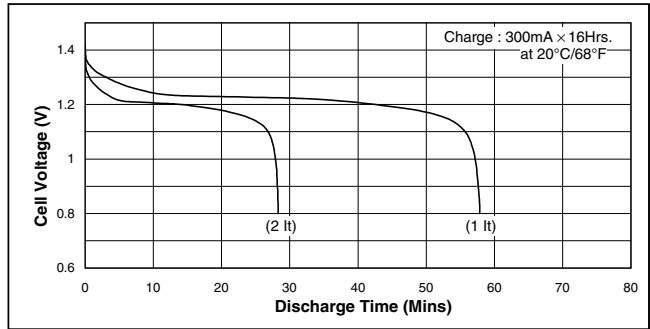


Charge

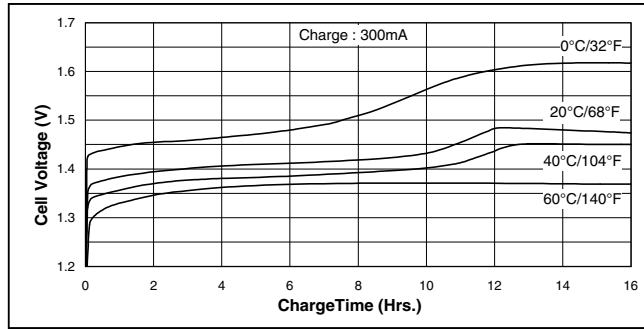

Discharge Trickle Charge (at high temperature)

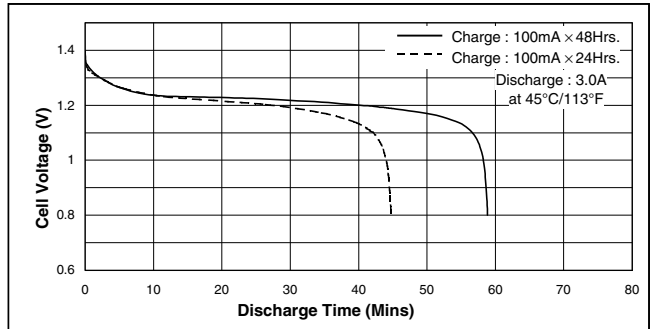

Discharge (at low rate)

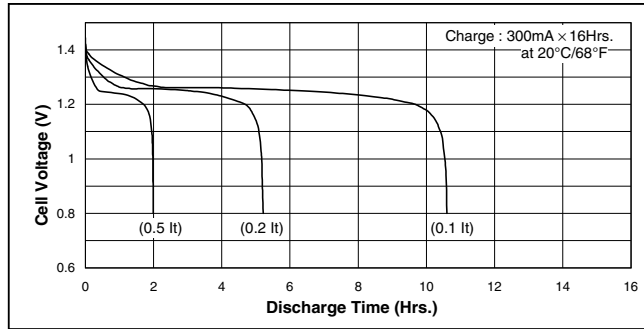

Temperature (Charge & Discharge)

