
DISCRETE SEMICONDUCTORS



Product specification Supersedes data of 2004 Apr 06 2004 Aug 16

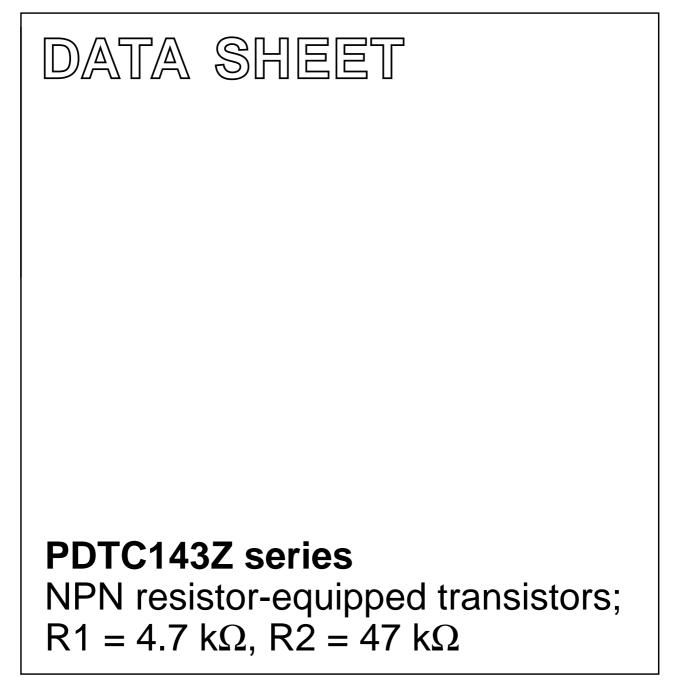

### **PDTC143Z series**

#### FEATURES

- Built-in bias resistors
- Simplified circuit design
- Reduction of component count
- Reduced pick and place costs.

#### APPLICATIONS

- General purpose switching and amplification
- Inverter and interface circuits
- Circuit driver.

**PRODUCT OVERVIEW** 

#### QUICK REFERENCE DATA

SYMBOL	PARAMETER	TYP.	MAX.	UNIT
V <sub>CEO</sub>	collector-emitter voltage	-	50	V
lo	output current (DC)	-	100	mA
R1	bias resistor	4.7	_	kΩ
R2	bias resistor	47	_	kΩ

#### DESCRIPTION

NPN resistor-equipped transistor (see "Simplified outline, symbol and pinning" for package details).

\*54(1)

PDTA143ZU

TYPE NUMBER	PAC	<b>KAGE</b>		PNP COMPLEMENT	
	PHILIPS	EIAJ	MARKING CODE		
PDTC143ZE	SOT416	SC-75	38	PDTA143ZE	
PDTC143ZEF	SOT490	SC-89	53	PDTA143ZEF	
PDTC143ZK	SOT346	SC-59	18	PDTA143ZK	
PDTC143ZM	SOT883	SC-101	E3	PDTA143ZM	
PDTC143ZS	SOT54 (TO-92)	SC-43	TC143Z	PDTA143ZS	
PDTC143ZT	SOT23	_	*18 <sup>(1)</sup>	PDTA143ZT	

SC-70

SOT323

#### Note

PDTC143ZU

- 1. \* = p: Made in Hong Kong.
  - \* = t: Made in Malaysia.
  - \* = W: Made in China.

## PDTC143Z series

#### SIMPLIFIED OUTLINE, SYMBOL AND PINNING

	SIMPLIFIED OUTLINE AND SYMBOL		PINNING		
TYPE NUMBER			DESCRIPTION		
PDTC143ZS		1	base		
		2	collector		
	$ \begin{array}{c} 1 \\ 2 \\ 3 \\ \end{array} $ $ \begin{array}{c} R1 \\ R2 \\ 3 \\ \end{array} $ $ \begin{array}{c} R2 \\ 3 \\ \end{array} $ $ \begin{array}{c} R1 \\ R2 \\ 3 \\ \end{array} $ $ \begin{array}{c} R2 \\ 3 \\ \end{array} $	3	emitter		
PDTC143ZE PDTC143ZEF PDTC143ZK PDTC143ZT PDTC143ZU	$\begin{array}{c} \hline 3 \\ \hline 1 \\ \hline 1 \\ \hline \end{array} \\ Top view \end{array} \qquad \begin{array}{c} 1 \\ \hline \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\$	1 2 3	base emitter collector		
PDTC143ZM	2 1 bottom view MHC506	1 2 3	base emitter collector		

## PDTC143Z series

#### **ORDERING INFORMATION**

	PACKAGE				
TYPE NUMBER	NAME	DESCRIPTION	VERSION		
PDTC143ZE	_	plastic surface mounted package; 3 leads	SOT416		
PDTC143ZEF	-	<ul> <li>plastic surface mounted package; 3 leads</li> <li>S</li> </ul>			
PDTC143ZK	-	<ul> <li>plastic surface mounted package; 3 leads</li> </ul>			
PDTC143ZM	_	$\begin{array}{c} - \\ \text{leadless ultra small plastic package; 3 solder lands; body} \\ 1.0 \times 0.6 \times 0.5 \text{ mm} \end{array}$			
PDTC143ZS	ZS – plastic single-ended leaded (through hole) package; 3 leads S		SOT54		
PDTC143ZT	-	<ul> <li>plastic surface mounted package; 3 leads</li> </ul>			
PDTC143ZU	_	<ul> <li>plastic surface mounted package; 3 leads</li> </ul>			

#### LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V <sub>CBO</sub>	collector-base voltage	open emitter	_	50	V
V <sub>CEO</sub>	collector-emitter voltage	open base	_	50	V
V <sub>EBO</sub>	emitter-base voltage	open collector	_	10	V
VI	input voltage				
	positive		_	+30	V
	negative		_	-5	V
lo	output current (DC)		_	100	mA
I <sub>CM</sub>	peak collector current		_	100	mA
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> ≤ 25 °C			
	SOT54	note 1	_	500	mW
	SOT23	note 1	_	250	mW
	SOT346	note 1	_	250	mW
	SOT323	note 1	_	200	mW
	SOT883	notes 2 and 3	_	250	mW
	SOT416	note 1	_	150	mW
	SOT490	notes 1 and 2	_	250	mW
T <sub>stg</sub>	storage temperature		-65	+150	°C
Tj	junction temperature		_	150	°C
T <sub>amb</sub>	operating ambient temperature		-65	+150	°C

#### Notes

- 1. Refer to standard mounting conditions.
- 2. Reflow soldering is the only recommended soldering method.
- 3. Refer to SOT883 standard mounting conditions; FR4 with 60  $\mu$ m copper strip line.

## PDTC143Z series

#### THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R <sub>th(j-a)</sub>	thermal resistance from junction to ambient	in free air		
	SOT54	note 1	250	K/W
	SOT23	note 1	500	K/W
	SOT346	note 1	500	K/W
	SOT323	note 1	625	K/W
	SOT883	notes 2 and 3	500	K/W
	SOT416	note 1	833	K/W
	SOT490	notes 1 and 2	500	K/W

#### Notes

- 1. Refer to standard mounting conditions.
- 2. Reflow soldering is the only recommended soldering method.
- 3. Refer to SOT883 standard mounting conditions; FR4 with 60  $\mu$ m copper strip line.

#### CHARACTERISTICS


 $T_{amb}$  = 25 °C unless otherwise specified.


SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I <sub>CBO</sub>	collector-base cut-off current	$V_{CB} = 50 \text{ V}; \text{ I}_{E} = 0 \text{ A}$	-	-	100	nA
I <sub>CEO</sub>	collector-emitter cut-off current	$V_{CE} = 30 \text{ V}; I_B = 0 \text{ A}$	—	-	1	μA
		$V_{CE} = 30 \text{ V}; \text{ I}_{B} = 0 \text{ A}; \text{ T}_{j} = 150 ^{\circ}\text{C}$	-	-	50	μA
I <sub>EBO</sub>	emitter-base cut-off current	$V_{EB} = 5 \text{ V}; \text{ I}_{C} = 0 \text{ A}$	-	-	170	μA
h <sub>FE</sub>	DC current gain	$V_{CE} = 5 \text{ V}; \text{ I}_{C} = 10 \text{ mA}$	100	-	-	
V <sub>CEsat</sub>	collector-emitter saturation voltage	I <sub>C</sub> = 5 mA; I <sub>B</sub> = 0.25 mA	-	-	100	mV
V <sub>i(off)</sub>	input-off voltage	$I_{C} = 100 \ \mu\text{A}; \ V_{CE} = 5 \ V$	-	0.6	0.5	V
V <sub>i(on)</sub>	input-on voltage	$I_{C} = 5 \text{ mA}; V_{CE} = 0.3 \text{ V}$	1.3	0.9	-	V
R1	input resistor		3.3	4.7	6.1	kΩ
R2 R1	resistor ratio		8	10	12	
C <sub>c</sub>	collector capacitance	$I_E = i_e = 0 \text{ A}; V_{CB} = 10 \text{ V};$ f = 1 MHz	-	-	2.5	pF


PDTC143Z series


## NPN resistor-equipped transistors; R1 = 4.7 kΩ, R2 = 47 kΩ


#### PACKAGE OUTLINES

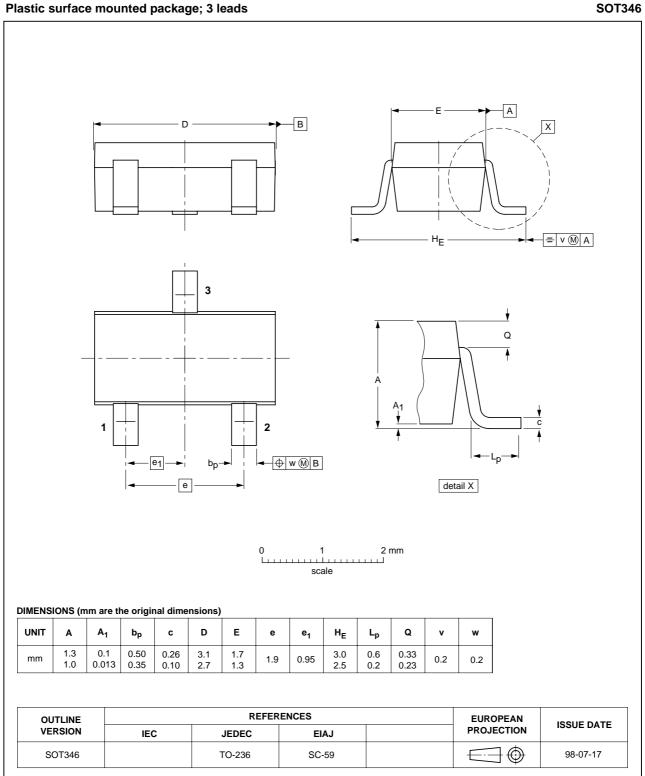


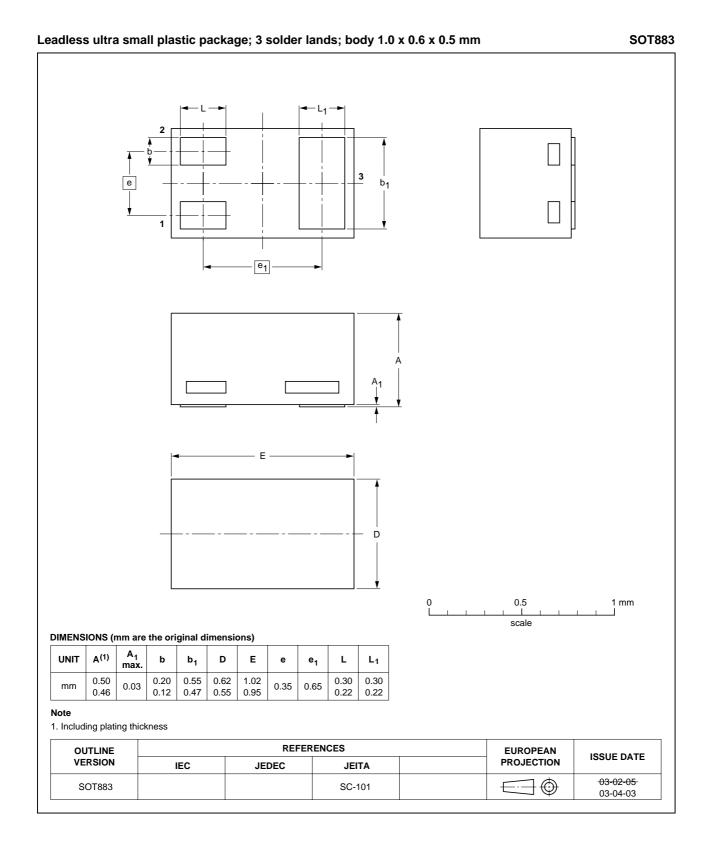

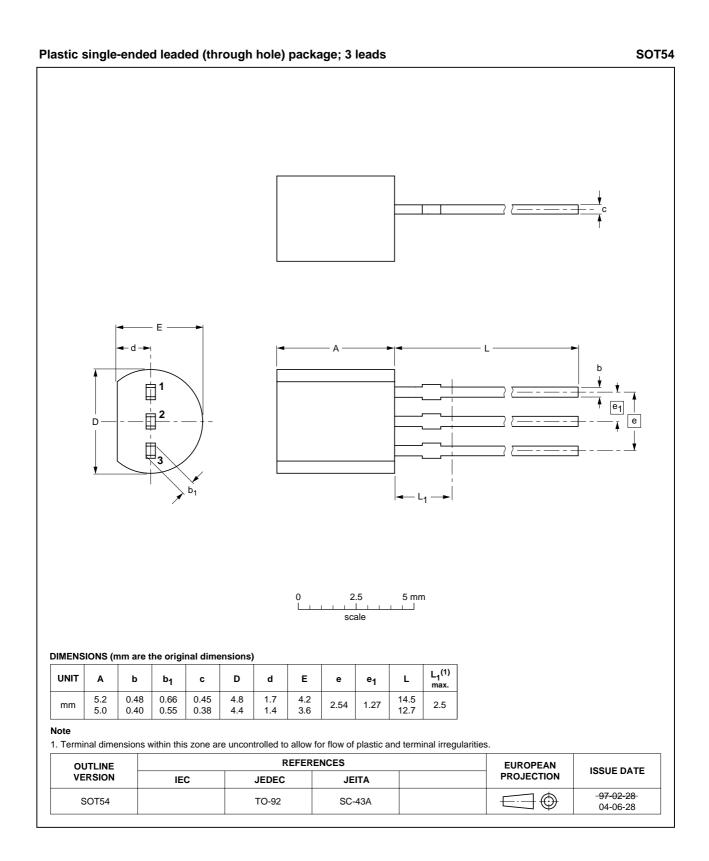


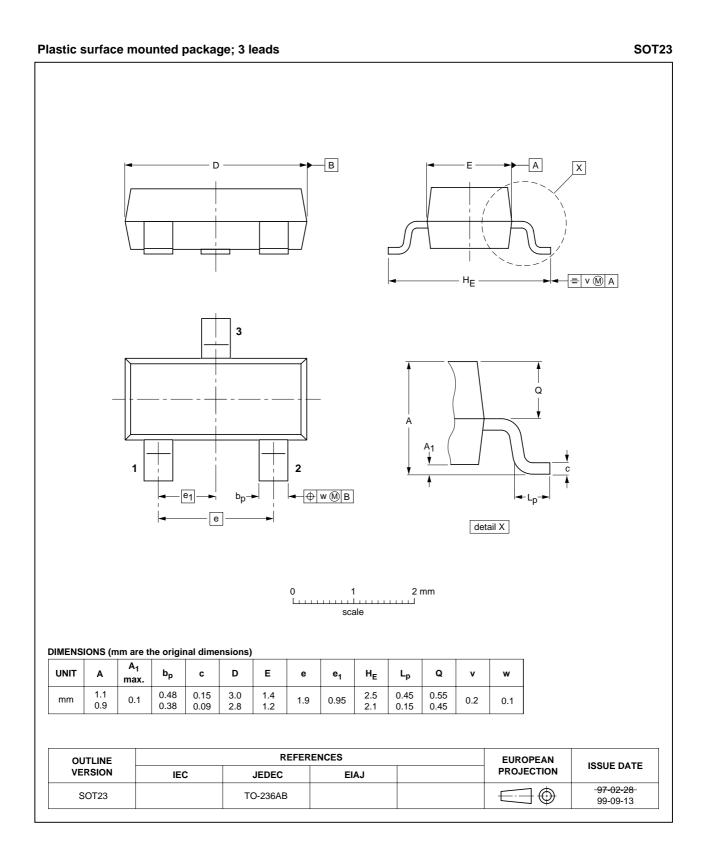

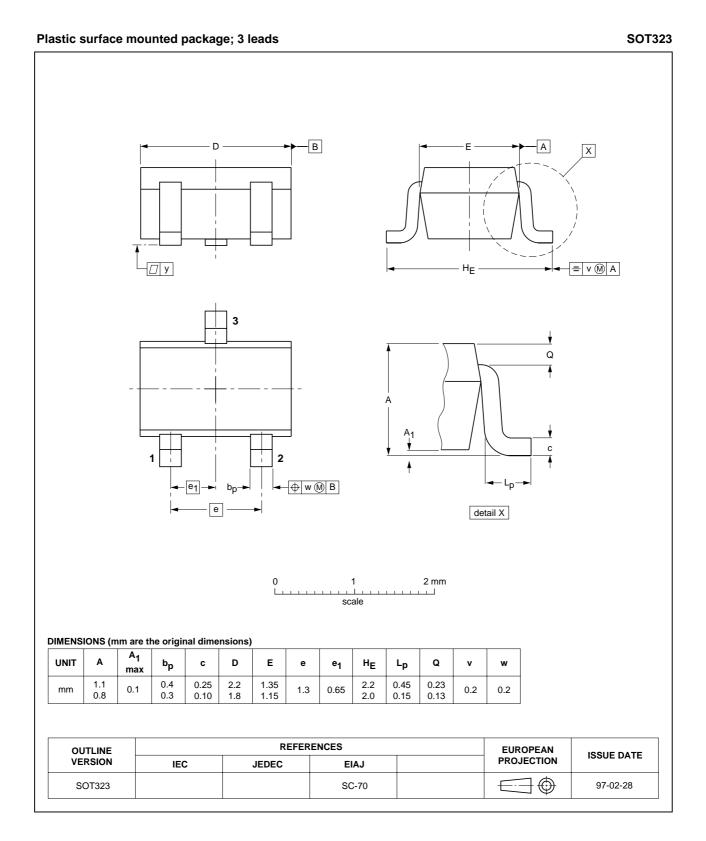

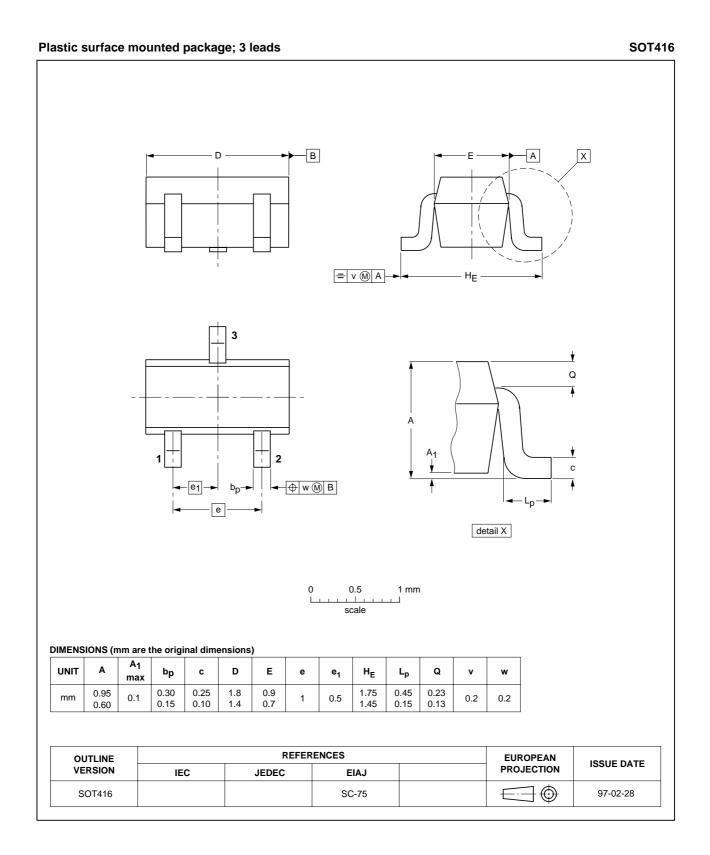

## PDTC143Z series

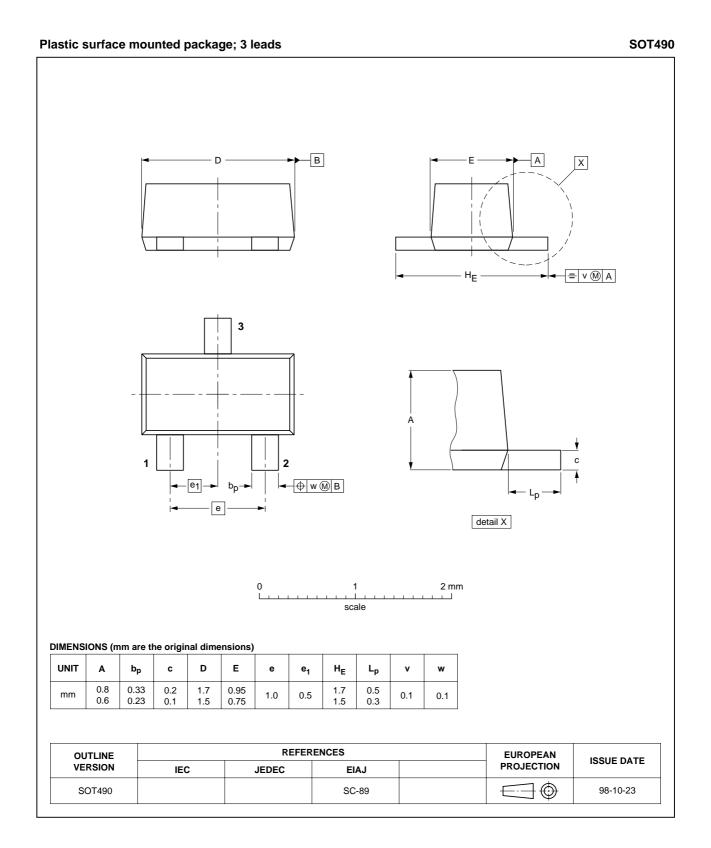

#### 2004 Aug 16

### PDTC143Z series

#### DATA SHEET STATUS

LEVEL	DATA SHEET STATUS <sup>(1)</sup>	PRODUCT STATUS <sup>(2)(3)</sup>	DEFINITION
I	Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
11	Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
	Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN).

#### Notes

- 1. Please consult the most recently issued data sheet before initiating or completing a design.
- 2. The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL http://www.semiconductors.philips.com.
- 3. For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

#### DEFINITIONS

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

#### DISCLAIMERS

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes in the products including circuits, standard cells, and/or software described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

## Philips Semiconductors – a worldwide company

#### **Contact information**

For additional information please visit http://www.semiconductors.philips.com. Fax: +31 40 27 24825 For sales offices addresses send e-mail to: sales.addresses@www.semiconductors.philips.com.

© Koninklijke Philips Electronics N.V. 2004

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

R75/07/pp14

Date of release: 2004 Aug 16

Document order number: 9397 750 13677

SCA76

Let's make things better.



