


PART NAME	NON-METALLIC ENCLOSURE (STYLE D)	PART No.	NBD-10456 & NBD-10476 & NBD-15456
------------------	----------------------------------	-----------------	-----------------------------------

<p>MATERIAL:</p> <p><u>INDOOR VERSION</u> SOLID BODY & COVER _____ ABS/PC BLENDED PLASTIC UL94-5VB FLAMMABILITY RATING</p> <p>CLEAR COVER _____ POLYCARBONATE PLASTIC UL94V-0 FLAMMABILITY RATING UV STABILIZED</p> <p><u>OUTDOOR VERSION</u> SOLID BODY & COVER _____ PBT/PC BLENDED PLASTIC UL94-5VA FLAMMABILITY RATING UV STABILIZED</p>	<p>FINISH:</p> <p>BODY _____ LIGHT GRAY COVER _____ LIGHT GRAY OR CLEAR</p>	<p>COVER INCLUDES GRAY POLY-URETHANE GASKET.</p> <p>AIR AND MOISTURE VENTS, STAINLESS STEEL LOCKING HASP, PANEL MOUNTING RAILS, GALVANIZED STEEL INNER PANEL AND STAINLESS STEEL WALL MOUNTING BRACKETS ARE NOT INCLUDED, BUT CAN BE PURCHASED SEPARATELY.</p>	<p>INDUSTRY STANDARDS:</p> <p><u>INDOOR VERSION</u> UL508 TYPE 1, 2, 4, 4X INDOOR, 12 & 13 NEMA TYPE 1, 2, 4, 4X, 12 & 13 IEC529-IP65</p> <p><u>OUTDOOR VERSION</u> UL508 TYPE 1, 2, 4, 4X, 12 & 13 NEMA TYPE 1, 2, 4, 4X, 12 & 13 IEC529-IP65</p>
--	---	--	---

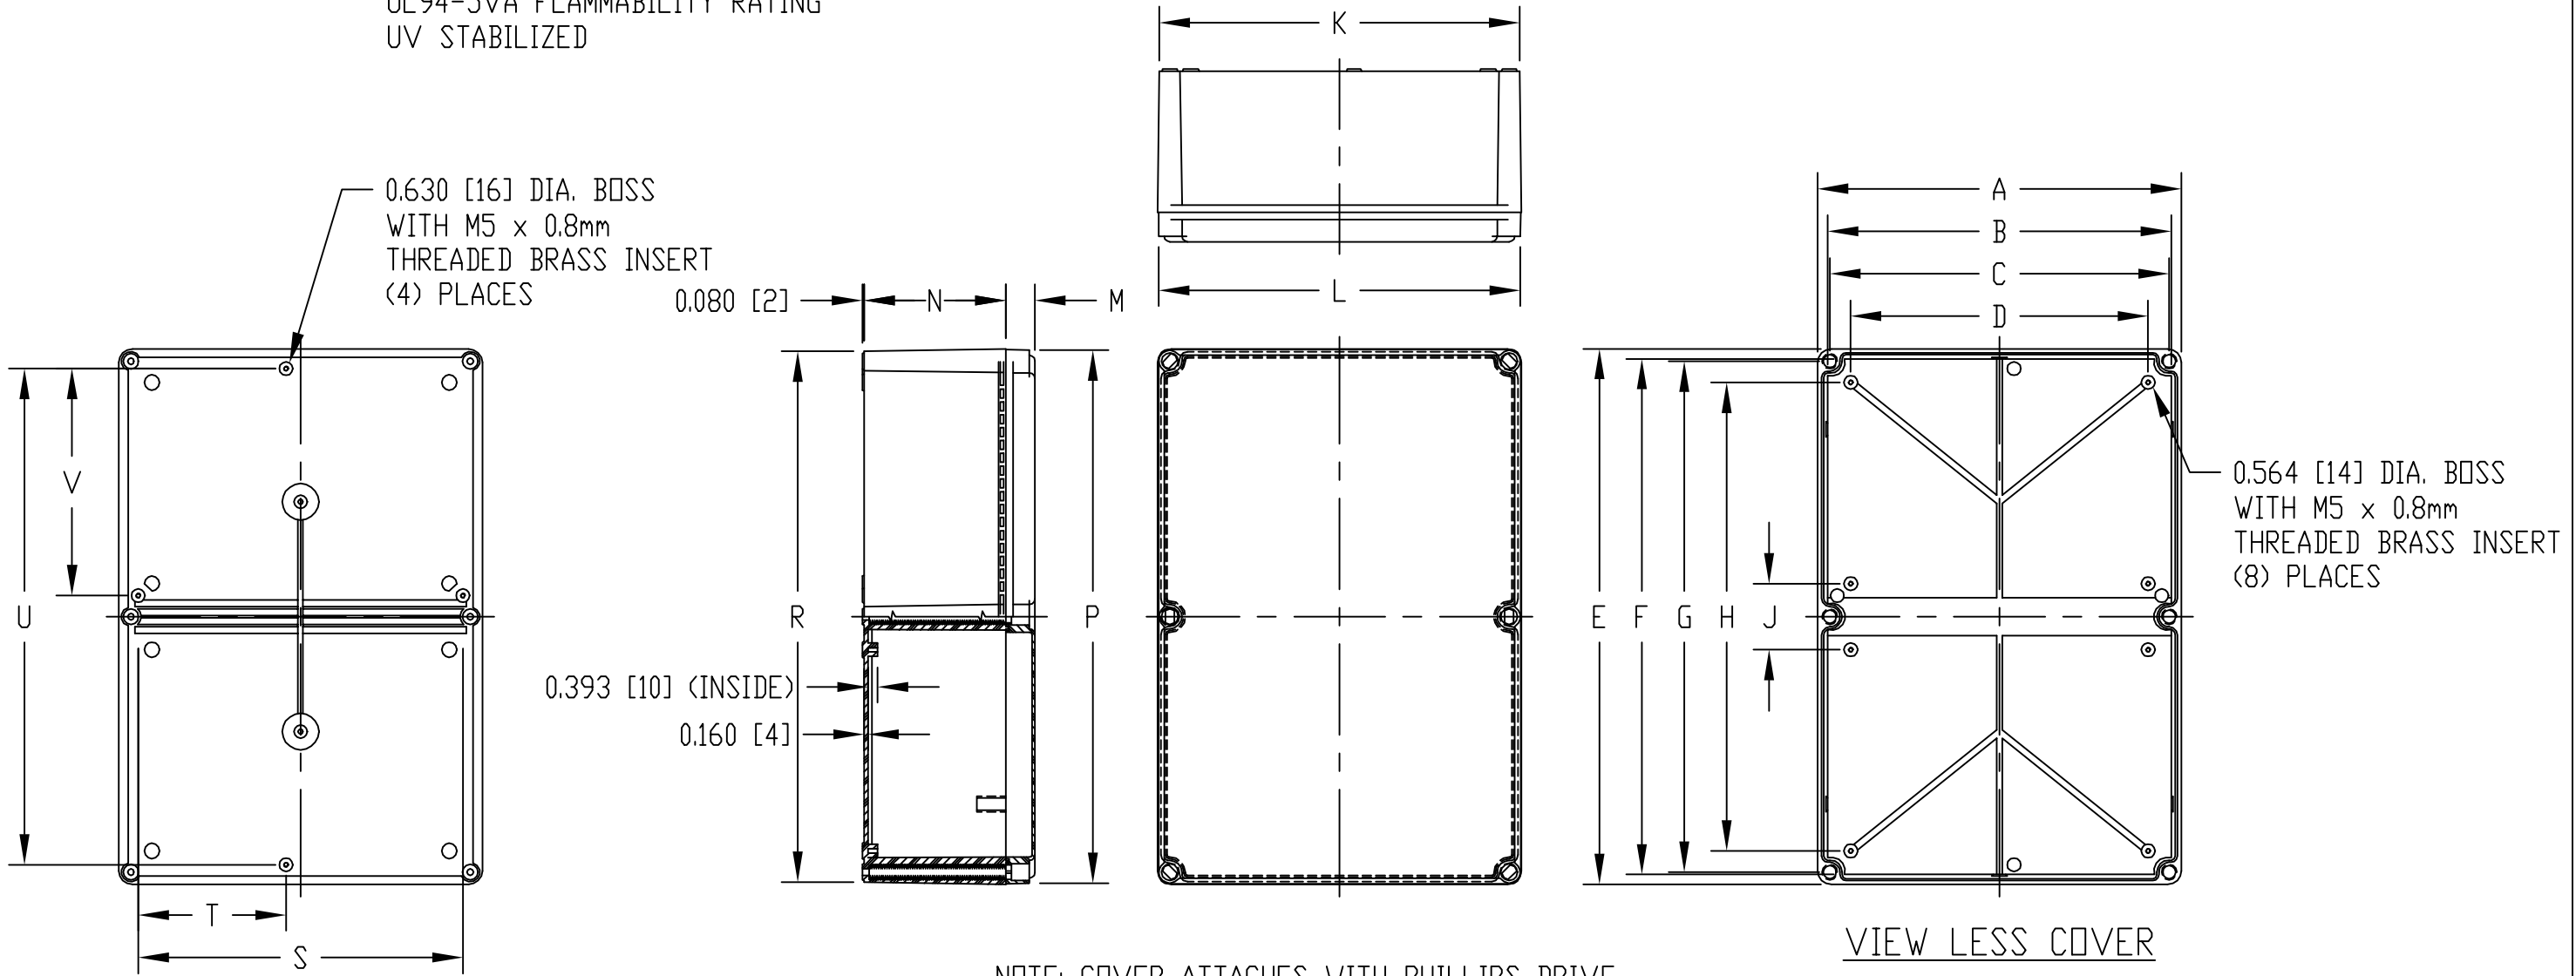

NOTE: COVER ATTACHES WITH PHILLIPS DRIVE NON-METALLIC SCREWS. (NOT SHOWN)

NOTE: ALL DIMENSIONS HAVE ±0.039 [±1] TOLERANCE UNLESS OTHERWISE SPECIFIED

DIMENSIONS = INCHES [MILLIMETERS]

INDOOR VERSION		OUTDOOR VERSION	DIMENSIONS																		
PART NO.		PART NO.	DIMENSIONS																		
SOLID COVER	CLEAR COVER	SOLID COVER	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V
NBD-10456	NBD-10476	NBD-15456	14.975 [380]	14.170 [360]	13.984 [355]	12.252 [311]	22.085 [561]	21.260 [540]	21.062 [535]	19.313 [491]	2.724 [69]	14.838 [377]	14.890 [378]	1.210 [31]	5.825 [148]	21.958 [558]	21.870 [555]	13.378 [340]	6.093 [155]	20.455 [520]	9.360 [238]