


1830<sup>+76</sup><sub>-25</sub> (6FT<sup>+3</sup><sub>-1</sub>IN)

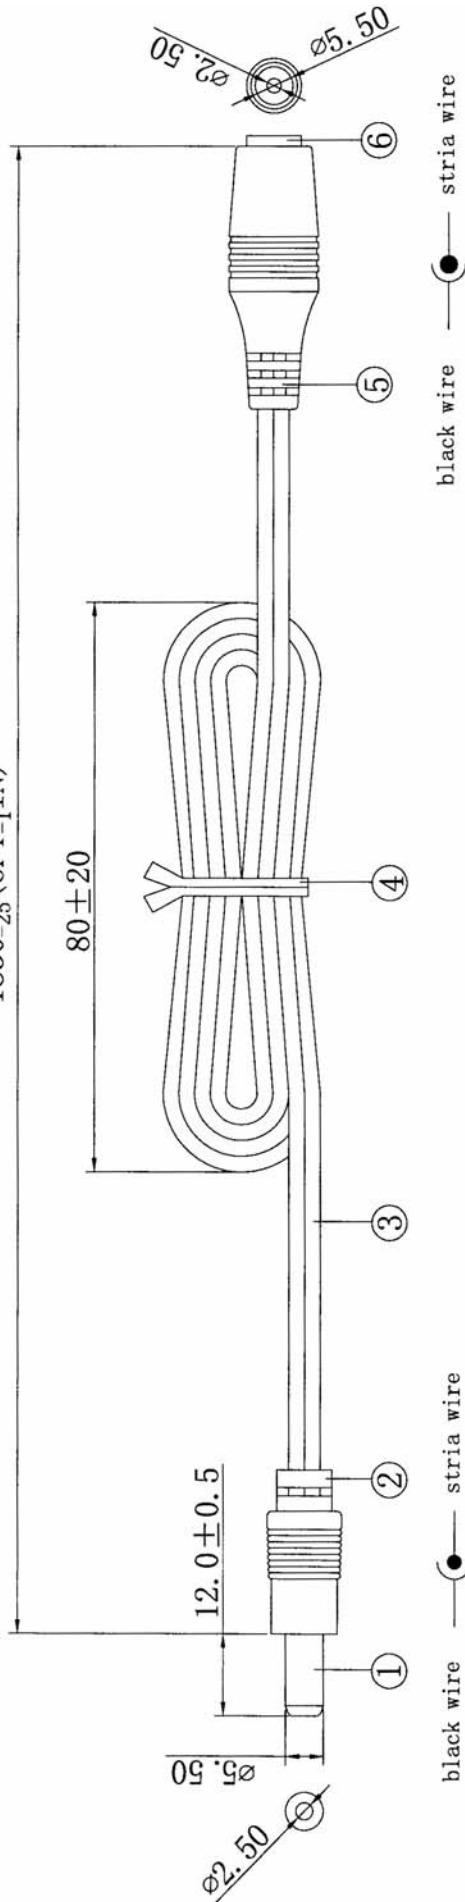

No.	DESCRIPTION	SPECIFICATION	UNIT	Q' TY
1	PLUG	ø2.50x5.50x22±0.5mm black color hardware Ni-plate.	EA	1
2	PLUG HOLDER	used 30P black color PVC. M160	EA	1
3	CABLE	UL2468 AWG#18 0.16 x 41 rootlets x 2C, black color twin wire, O.D. 2.2 by 4.4 ±0.1mm.	MM	1840 <sup>+20</sup> <sub>-0</sub>
4	BAND WIRE	black enfold gluey wire.	MM	89±3
5	SOCKET	Used 30P black color PVC.	EA	1
6	PLUG HOLDER	ø2.50x5.50 socket Ni-plate	EA	1

FUNCTION TEST: No open, no reversed polarity, no short-circuit, no INT

HI-POT TEST: 600VAC, 0.5mA, 1Second.

CABLE ASSEMBLY SHALL BE IN COMPLIANCE WITH ROHS REQUIREMENT.

		Description: Extension Cable, 5.5mm x 2.5mm DC Jack to P6 Plug, 6ft, 18AWG Zip Cord
	UNITS   mm Tolerance: X = ± 0.5 .X = ± 0.25 .XX = ± 0.05 07-06-2006	Part Number: <b>CA-2209</b>

