


1830⁺⁷⁶₋₂₅ (6FT⁺³₋₁IN)

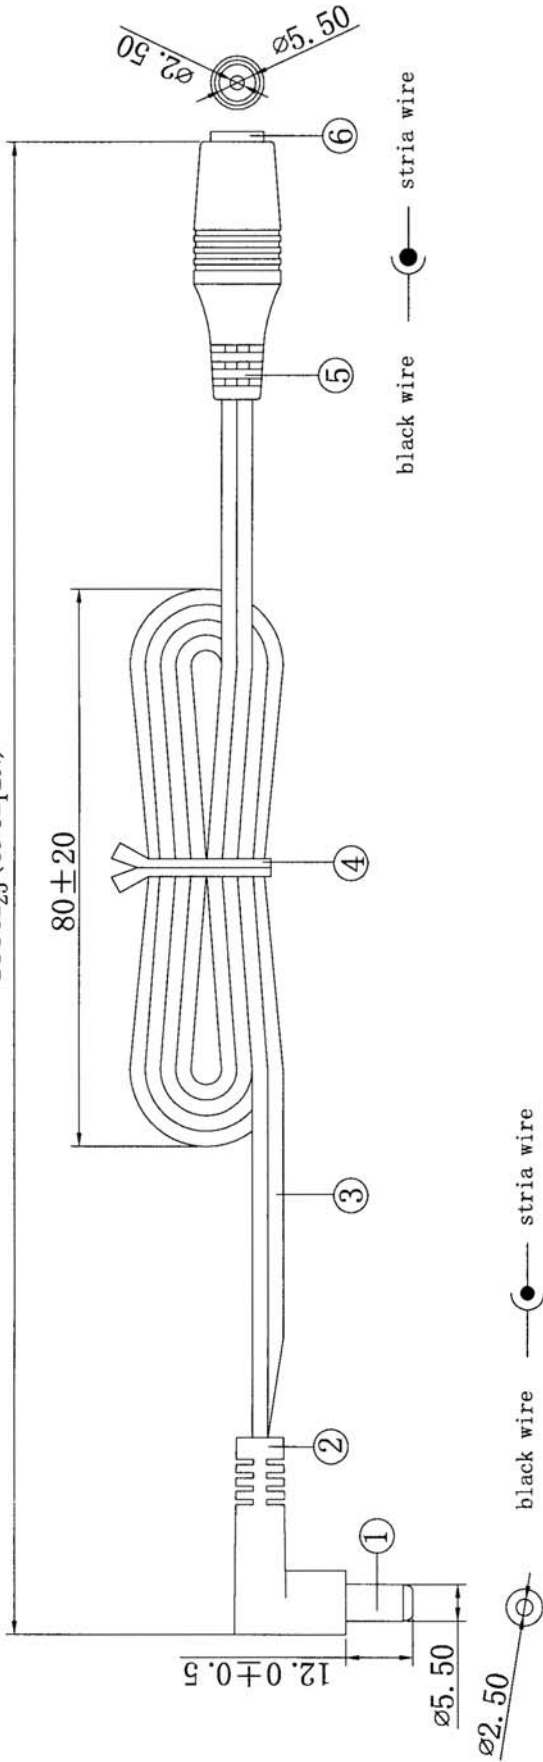

| No. | DESCRIPTION | SPECIFICATION | UNIT | Q'TY |
|-----|-------------|--|------|-----------------------------------|
| 1 | PLUG | ø2.50x5.50x22±0.5mm black color hardware Ni-plate. | EA | 1 |
| 2 | PLUG HOLDER | used 30P black color PVC. | EA | 1 |
| 3 | CABLE | UL2468 AWG#18 0.16 x 41 rootlets x 2C, black color twin wire, 0.D. 2.2 by 4.4±0.1mm. | MM | 1840 ⁺²⁰ ₋₀ |
| 4 | BAND WIRE | black enfold gluey wire. | MM | 89±3 |
| 5 | SOCKET | Used 30P black color PVC. | EA | 1 |
| 6 | PLUG HOLDER | ø2.50x5.50 socket Ni-plate | EA | 1 |

FUNCTION TEST: No open, no reversed polarity, no short-circuit, no INT

HI-POT TEST: 600VAC, 0.5mA, 1Second.
CABLE ASSEMBLY SHALL BE IN COMPLIANCE WITH ROHS REQUIREMENT.

| | | |
|--|------------|------------|
| | UNITS | mm |
| | Tolerance: | |
| | X | ± 0.5 |
| | .X | ± 0.25 |
| | .XX | ± 0.05 |
| | | 07-06-2006 |

Description:
Extension Cable, 5.5mm x 2.5mm DC
Jack to R/A P6 Plug, 6ft, 18AWG Zip Cord

Part Number:

CA-2212

