


915 ± 50 (3FT ± 2IN)

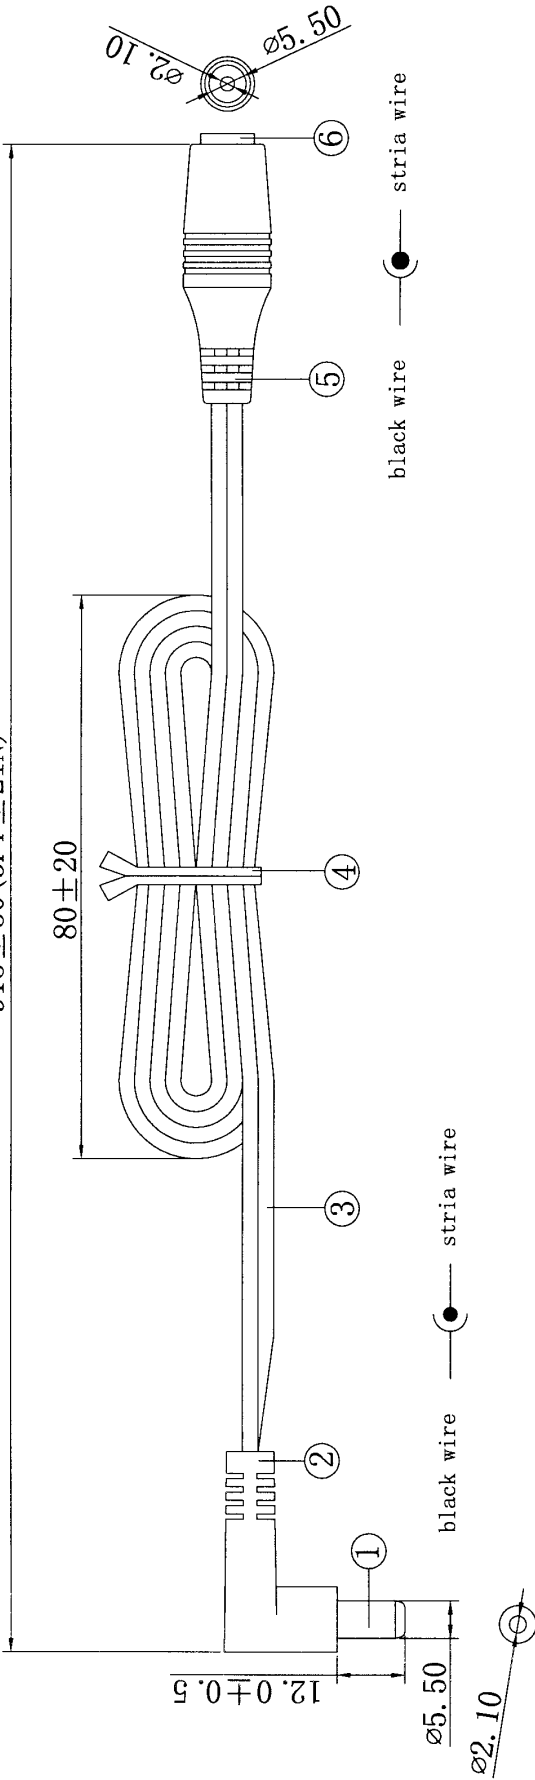

| No. | DESCRIPTION | SPECIFICATION | UNIT | O' TY |
|-----|-------------|--|------|----------------------------------|
| 1 | PLUG | ø2.10x5.50x22 ± 0.5mm black color hardware Ni-plate. | EA | 1 |
| 2 | PLUG HOLDER | used 30P black color PVC. | EA | 1 |
| 3 | CABLE | UL2468 AWG#18 0.16 x 41 rootlets x 2C, black color twin wire, O.D. 2.2 by 4.4 ± 0.1mm. | MM | 920 ⁺¹⁰ ₋₀ |
| 4 | BAND WIRE | black enfold gluey wire. | MM | 89 ± 3 |
| 5 | SOCKET | Used 30P black color PVC. | EA | 1 |
| 6 | PLUG HOLDER | ø2.10x5.50 socket Ni-plate | EA | 1 |

FUNCTION TEST: No open, no reversed polarity, no short-circuit, no INT

HI-POT TEST: 600VAC, 0.5mA, 1Second.
CABLE ASSEMBLY SHALL BE IN COMPLIANCE WITH RoHS REQUIREMENT.

Description:
Extension Cable, 5.5mm x 2.1mm DC
Jack to R/A P5 Plug, 3ft, 18AWG Zip Cord

Part Number:
CA-2219

UNITS: mm
Tolerance:
X = ± 0.5
.X = ± 0.25
.XX = ± 0.05

07-06-2006

