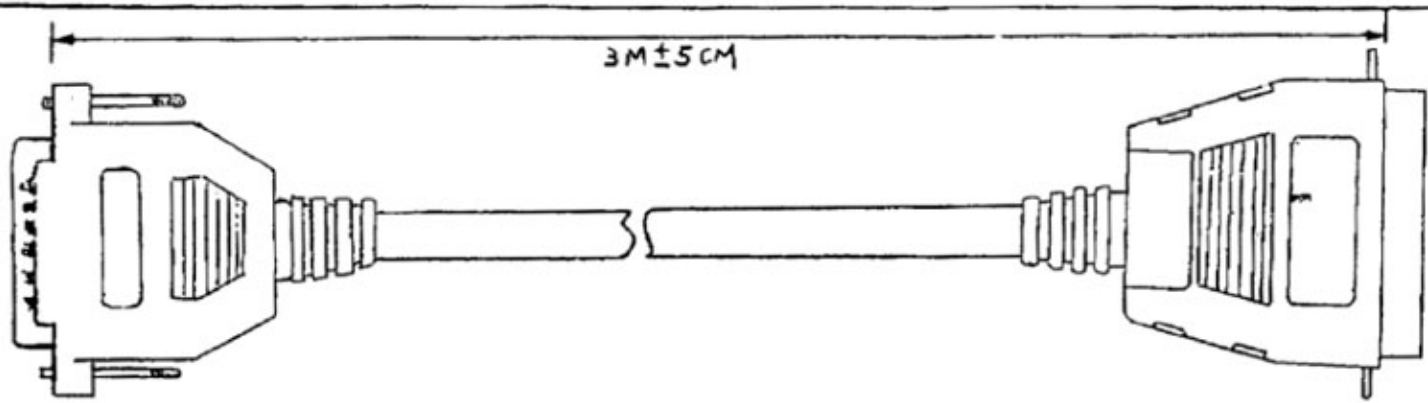


NOTE:
1.CABLE:NON-UL,28AWG(7/0.127mm) 25C+1.
AL-FOIL,BEIGE COLOR. PVC JACKET.
2.LENGTH:3M(GENERAL ERROR).
3.CONNECTOR:D-SUB CONNECTION 25 MALE *1.
CONNECTOR:CENTRONIC 36 MALE *1.
CONTACT:GOLD FLASH.
4.HOOD:PLASTIC HOOD ASS'Y WITH SPEEDY-HOOD.
5.ELECTRICAL TEST:
1).100% OPEN SHORT TEST.
2).INSULATION RESISTANCE:500K.
6.CONFIGURATION:

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| D25P | 1 | 2 | 3.... | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 SHIELD |
| CN36P | 1 | 2 | 3.... | 14 | 32 | 31 | 36 | 33 | 19 | 21 | 23 | 25 | 27 | 29 | 30 SHIELD |

| OTHER TOLERANCE | X | .XX | .XX | Item | Description | Material | Finish | Q'ty |
|---|---|---|---|---|---|---|---|---|

| 修正 REVISION | 日期 DATE | 說明 DESCRIPTION | 製圖 DRAWN BY | Jack | AK102-3 | ASSMANN Electronics, Inc. | 比例 SCALE NON | 圖號 DRAWING NO. |
|---|---|---|---|---|---|---|---|---|
| | | | 設計 DESIGNED BY | | | | | |
| | | | 核准 APPROVAL BY | | | | 單位 UNIT(mm) | |