

## 1- stage filter for 3-phase systems

**Description**

- Available as line-filter with normal or high attenuation
- Available as high voltage filter (up to 520 VAC)
- Very high symmetrical and asymmetrical attenuation loss
- In the frequency range from 10kHz up to 300MHz

**Standards**

- IEC 60939
- UL 1283
- EN 133 200

**Approvals**

- VDE License Number: 40004666 + 40004673

**Applications**

- Voltage rating 480 - 520 VAC for world wide acceptance
- Protection against interference voltage from the mains
- For standard and industrial applications
- Qualified for use in equipment according IEC/EN 60950

**References**

[General Product Information](#)

**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


**Technical Data**

Rated Current	6 - 1100A @ Ta 40°C
Rated Voltage	480 - 520 VAC, 50/60 Hz
Approval for	6 - 1100A @ Ta 40 °C / 520VAC; 50Hz
Leakage Current	industrial < 5 mA (440V / 50Hz)
Dielectric Strength for 480 VAC	2.25kVDC between 3kVDC between L-PE
Dielectric Strength for 520 VAC	2.25 between L-L 4 between L-PE Test voltage (2sec)
Number of Filter Stages	1
Weight	0.9 - 47 kg
Material: Housing	Metal
Sealing Compound	UL 94V-0


Mounting	Screw-on mounting on chassis from top
Terminal	Screw Clamp
Operating Temperature [°C]	-25°C to 100°C
Climatic Category	25/100/21 acc. to IEC 60068-1
Degree of Protection	IP 20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
MTBF	> 200'000h acc. to MIL-HB-217 F

**Dimensions**

## Case 24-3

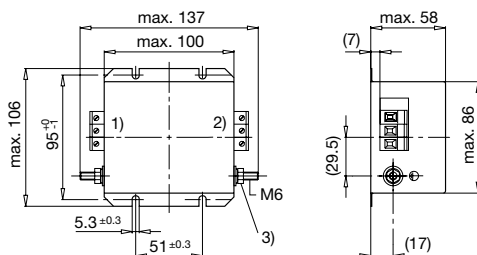


## Case 31-3

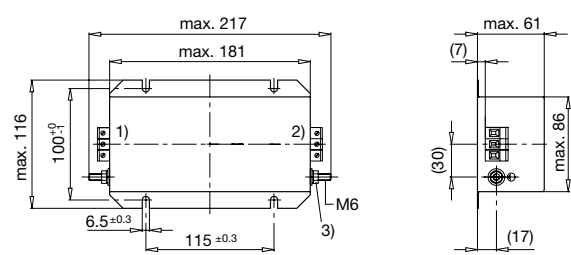


- 1) Line
- 2) Load
- 3) Tightening torque 3...4 Nm


Case 32-3

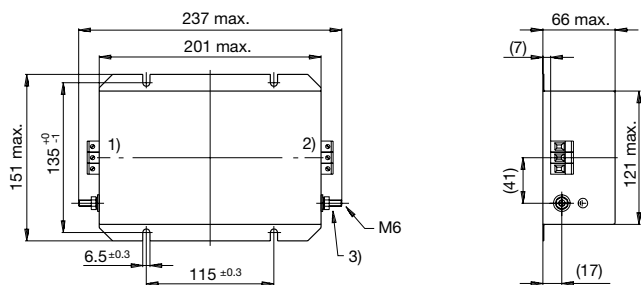


Case 32-7

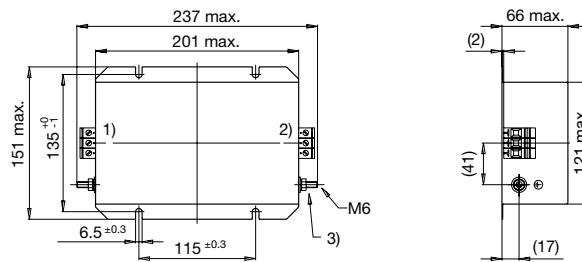


Case 32-C

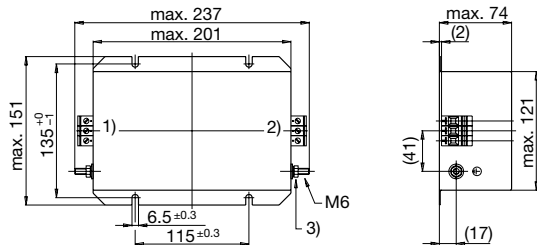


Case 34-3

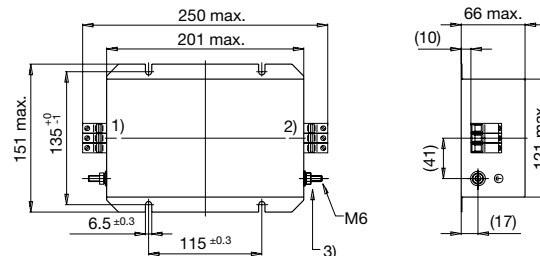

Case 34-C

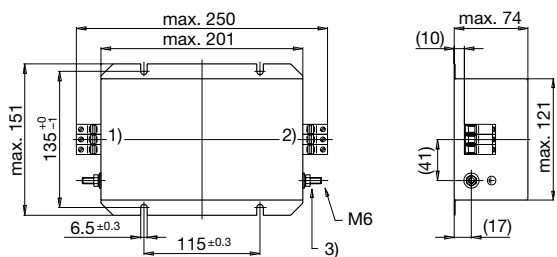


Case 37-3

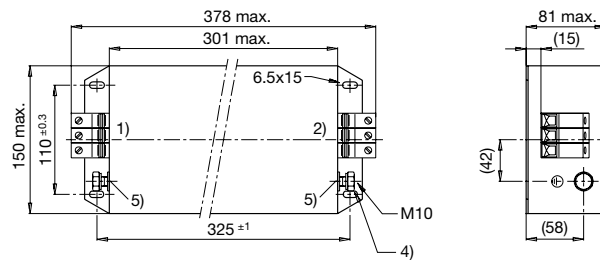


- 1) Line
- 2) Load
- 3) Tightening torque 3...4 Nm
- 4) Tightening torque 10...17 Nm
- 5) Do not unscrew lock-nut

Case 53-3

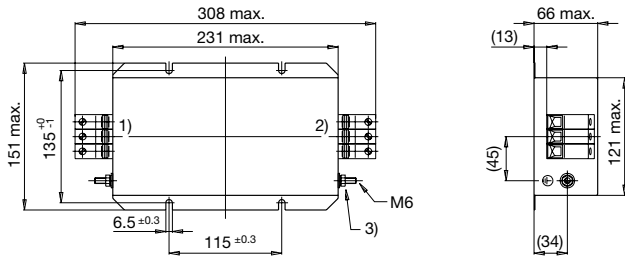



Case 54-3

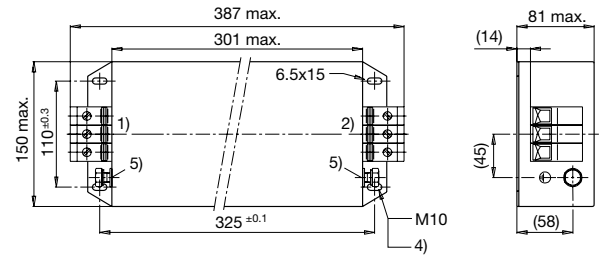


- 1) Line
- 2) Load
- 3) Tightening torque 3...4 Nm
- 4) Tightening torque 10...17 Nm
- 5) Do not unscrew lock-nut

Case 55-3


Case 56-3

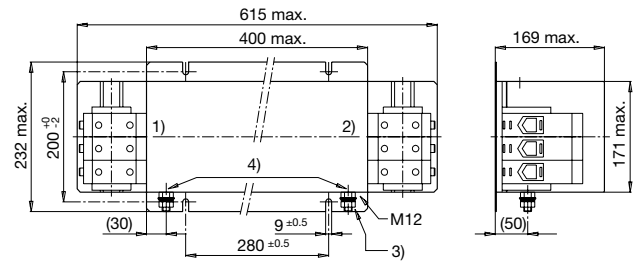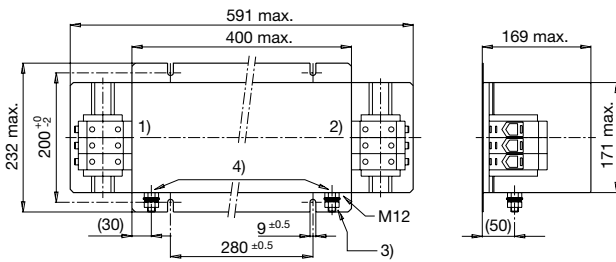

Case 57

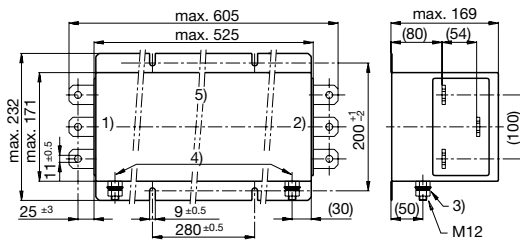

Case 74

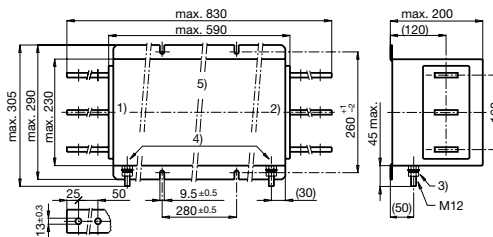


- 1) Line
- 2) Load
- 3) Tightening torque 14...30 Nm
- 4) Do not unscrew lock-nut
- 5) Current plates 720 mm<sup>2</sup> (60x12)

### Technical data to the filter components

Rated Current [A]	Characteristic	Rated Voltage [VAC]	L [mH]	C1 [μF]	C2 [μF]	C3 [nF]	C4 [nF]	C5 [μF]	C6 [μF]	R1 [MΩ]	R2 [MΩ]	R3 [MΩ]	R4 [MΩ]
6	Excellent attenuation	480	10	1.0	-	100	10	2.2	-	-	-	1	1
16	Excellent attenuation	480	6	1.0	-	100	10	2.2	-	-	-	1	1
25	Excellent attenuation	480	3	4.4	1	10	47	4.4	1	2.2	1	1	2.2
36	Excellent attenuation	480	2	4.4	1	10	47	4.4	1	2.2	1	1	2.2
50	Excellent attenuation	480	1	4.4	1	10	100	4.4	1	2.2	1	1	2.2
80	Excellent attenuation	480	1	6.6	1	47	100	6.6	1	2.2	1	1	2.2
64	Excellent attenuation	480	0.6	4.4	1	10	100	4.4	1	2.2	1	1	2.2
110	Excellent attenuation	480	0.7	6.6	1	47	100	6.6	1	2.2	1	1	2.2
180	Excellent attenuation	480	0.4	6.6	1	47	100	6.6	1	2.2	1	1	2.2
250	Excellent attenuation	480	0.3	11	1	100	100	11	1	2.2	0.5	0.5	2.2
340	Excellent attenuation	480	0.2	11	1	100	100	22	1	2.2	0.33	0.33	2.2
25	High attenuation	480	2.4	4.4	1	10	47	4.4	1	2.2	-	1	2
36	High attenuation	480	1.5	4.4	1	10	47	4.4	1	2.2	-	1	2
50	High attenuation	480	1	4.4	1	10	100	4.4	1	2.2	-	1	2
64	High attenuation	480	0.6	4.4	1	10	100	4.4	1	2.2	-	1	2
16	High voltage filter	520	6	1.5	-	50	11	1.5	-	2	1	1	2
25	High voltage filter	520	3	3	1.1	50	11	3	1.1	2	1	1	2
36	High voltage filter	520	2	3	1.1	50	11	3	1.1	2	1	1	2
50	High voltage filter	520	1	3	1.1	50	11	3	1.1	2	1	1	2
80	High voltage filter	520	1	4.5	1.1	50	50	4.5	1.1	2	1	1	2
64	High voltage filter	520	0.6	3	1.1	50	11	3	1.1	2	1	1	2
110	High voltage filter	520	0.7	4.5	1.1	50	50	4.5	1.1	2	1	1	2
180	High voltage filter	520	0.4	4.5	1.1	50	50	4.5	1.1	2	1	1	2
250	High voltage filter	520	0.3	7.5	1.1	50	50	7.5	1.1	2	1	1	2
340	High voltage filter	520	0.2	7.5	1.1	50	50	15	1.1	2	1	1	2
1100	High voltage filter	520	0.12	11	1.1	50	-	22	1.1	2	0.5	0.25	2

### Diagrams

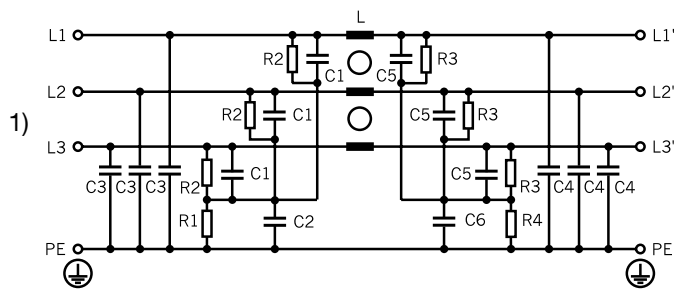


1) Power Line

**Attenuation Loss**


Industrial Version

--- differential mode \_\_\_\_ common mode


6A (FMAC-0924-0610)

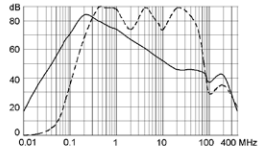


8A (FMAC-0931-0810)




16A (FMAC-0931-1610)  
16A (FMAC-0932-1610)




16A (FMAC-0931-1612I)

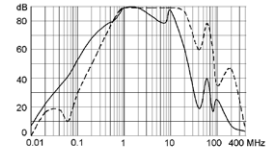


25A (FMAC-0932-2510)




25A (FMAC-0932-2510L)




25A (FMAC-0932-2512I)




36A (FMAC-0934-3610)

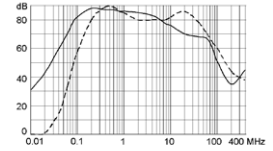


36A (FMAC-0932-3610L)




36A (FMAC-0932-3612I)




50A (FMAC-0934-5010)




50A (FMAC-0934-5010L)




50A (FMAC-0934-5012I)




64A (FMAC-0953-6410)




64A (FMAC-0934-6410L)




64A (FMAC-0953-6412I)

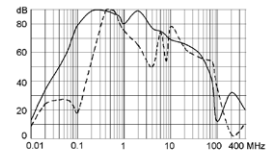


80A (FMAC-0937-8010)




80A (FMAC-0937-8012I)




110A (FMAC-0954-H110)




110A (FMAC-0954-H112I)




180A (FMAC-0955-H210)




180A (FMAC-0955-H212I)




250A (FMAC-0956-H310)




250A (FMAC-0956-H312I)

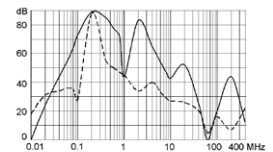


340A (FMAC-0956-H410)




340A (FMAC-0956-H412I)




450A (FMAC-0957-H550)



550A (FMAC-0957-H650)



1100A (FMAC-0974-K152I)



### Variants

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Rated Current [A]	Characteristic	Rated Voltage [VAC]	P <sub>loss</sub> [W]	Leakage Current <sup>1)</sup>	Contact Resistance [mΩ]	Weight [kg]	Clamps [mm <sup>2</sup> ]	Case	Order Number
6	Excellent attenuation	480	2.48	40	23	0.9	4	24-3	FMAC-0924-0610
8	Excellent attenuation	480	5.38	40	28	1.8	4	31-3	FMAC-0931-0810
25	Excellent attenuation	480	8.25	156	4.4	3.4	6	32-7	FMAC-0932-2510
16	Excellent attenuation	480	8.83	40	11.5	1.8	4	31-3	FMAC-0931-1610
16	Excellent attenuation	480	8.83	40	11.5	2.8	4	32-3	FMAC-0932-1610
50	Excellent attenuation	480	9.75	160	1.3	3.4	6	34-3	FMAC-0934-5010
36	Excellent attenuation	480	12.91	156	3.32	3.5	6	34-3	FMAC-0934-3610
64	Excellent attenuation	480	13.52	160	1.1	3.9	25	53-3	FMAC-0953-6410
80	Excellent attenuation	480	22.6	167	1.17	7	25	37-3	FMAC-0937-8010
110	Excellent attenuation	480	27.23	167	0.75	7.5	50	54-3	FMAC-0954-H110
180	Excellent attenuation	480	36	167	0.37	22	95	55-3	FMAC-0955-H210
250	Excellent attenuation	480	36	175	0.2	23.7	240	56-3	FMAC-0956-H310
450	Excellent attenuation	480	40	176	0.06	33	(B)	57	FMAC-0957-H550
340	Excellent attenuation	480	45	176	0.13	27	240	56-3	FMAC-0956-H410
550	Excellent attenuation	480	45	176	0.046	32	(B)	57	FMAC-0957-H650
25	High attenuation	480	9.86	156	5.26	3.5	4	32-7	FMAC-0932-2510L
36	High attenuation	480	10.55	156	2.71	3.75	6	32-C	FMAC-0932-3610L
50	High attenuation	480	12.63	160	1.68	3.6	6	34-C	FMAC-0934-5010L
64	High attenuation	480	18.23	160	1.48	4.2	6	34-C	FMAC-0934-6410L
25	High voltage filter	520	8.25	172	4.4	3.35	6	32-7	FMAC-0932-2512I
16	High voltage filter	520	8.83	26	11.5	1.8	4	31-3	FMAC-0931-1612I
50	High voltage filter	520	9.75	172	1.3	3.35	6	34-3	FMAC-0934-5012I
36	High voltage filter	520	12.91	172	3.32	3.3	6	34-3	FMAC-0934-3612I
64	High voltage filter	520	13.52	172	1.1	3.8	25	53-3	FMAC-0953-6412I
80	High voltage filter	520	22.6	179	1.17	7.28	25	37-3	FMAC-0937-8012I
110	High voltage filter	520	27.23	179	0.75	7.45	50	54-3	FMAC-0954-H112I
180	High voltage filter	520	36	179	0.37	23	95	55-3	FMAC-0955-H212I
250	High voltage filter	520	36	185	0.2	25	240	56-3	FMAC-0956-H312I
340	High voltage filter	520	45	188	0.13	30	240	56-3	FMAC-0956-H412I
1100	High voltage filter	520	80	182	0.022	47	(A)	74	FMAC-0974-K152I

1) Worst case leakage current acc. IEC60950 - Annex G4 (situation with two interrupted lines). Nominal leakage current acc. IEC6950 - 5.2.5. can be found in section technical data.

6A version: packing unit 2 pcs.

(A): Connecting straps for M12

(B): Connecting straps for M10

### Packaging unit

1 Pcs