


1

2

3

4


DB25 Male



23mm

3000±50


CN36 Male

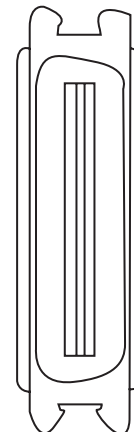

Configuration:

DB25M

CN36M

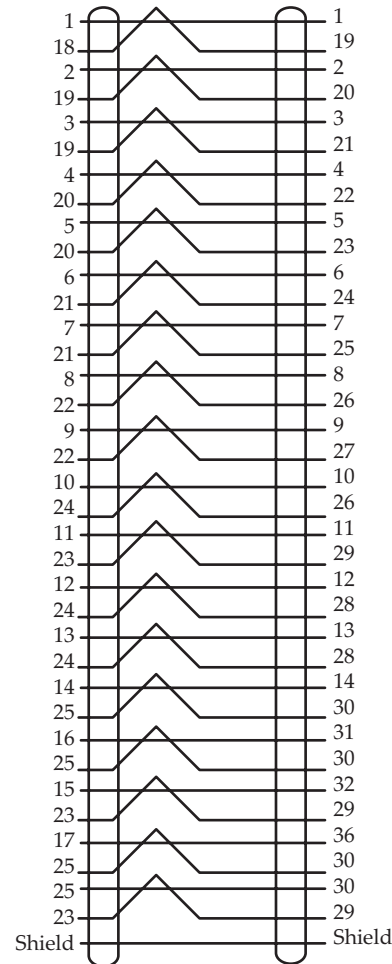

Material:

- 1.Cable: UL20276, #28,18PAIRS+1+AL/MY+Braid
(Beige PVC Jacket) O.D:7.5mm
Insulation conduct with P.P Type
- 2.Both connectors with normal type
- 3.Thumbscrew:#4-40UNC Type
- 4.Both connectors inner molded with copper tape and solder(360°)
Allover Molded with Beige PVC
Copper Tape Size:
DB25 Male:(30mmX95mm)
CN36 Male:(30mmX110mm)

+0.5mm
3.5-0mm

Note:

- 1.Total Length:3000±50mm
- 2.Color: Beige
- 3.Molded Type



Description

Name :
AK712-3-R
DB25 Male-CN36 Male



THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4

A

B

C

D

A

B

C

D