

“High Frequency Ceramic Solutions”

915 MHz Low Pass Filter

P/N 0915LP15A026

Detail Specification: 01/23/2003


Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Attenuation (min.)	Return Loss
0915LP15A026_	902 - 928	0.65 dB max.	25 dB @ $2 \times f_0$ 25 dB @ $3 \times f_0$	9.5 dB min.

Input Power	Impedance	Operating Temperature Range
3 Watt max	50 Ω	-40 to +85°C


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 + .004/-0.008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30+0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05

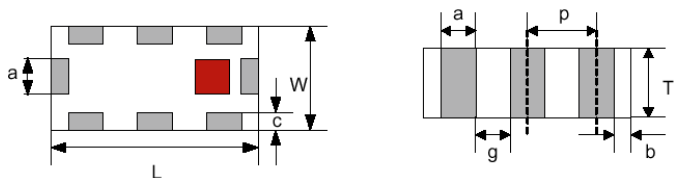


Terminal Configuration

No.	Function	No.	Function
1	GND	5	GND
2	NC	6	NC
3	GND	7	GND
4	OUT	8	IN



Mounting Considerations

- Mount these devices with brown mark facing up.
- Line width should be designed to provide 50 Ω impedance matching

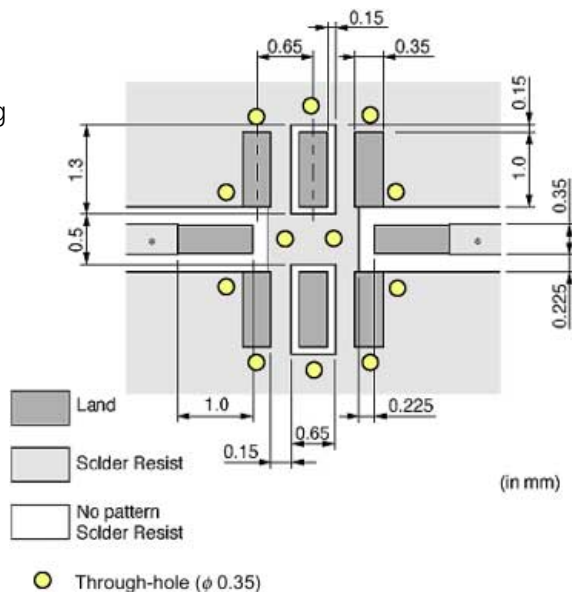

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.


“High Frequency Ceramic Solutions”

915 MHz Low Pass Filter

Detail Specification: 01/23/2003

P/N 0915LP15A026

Page 2 of 2

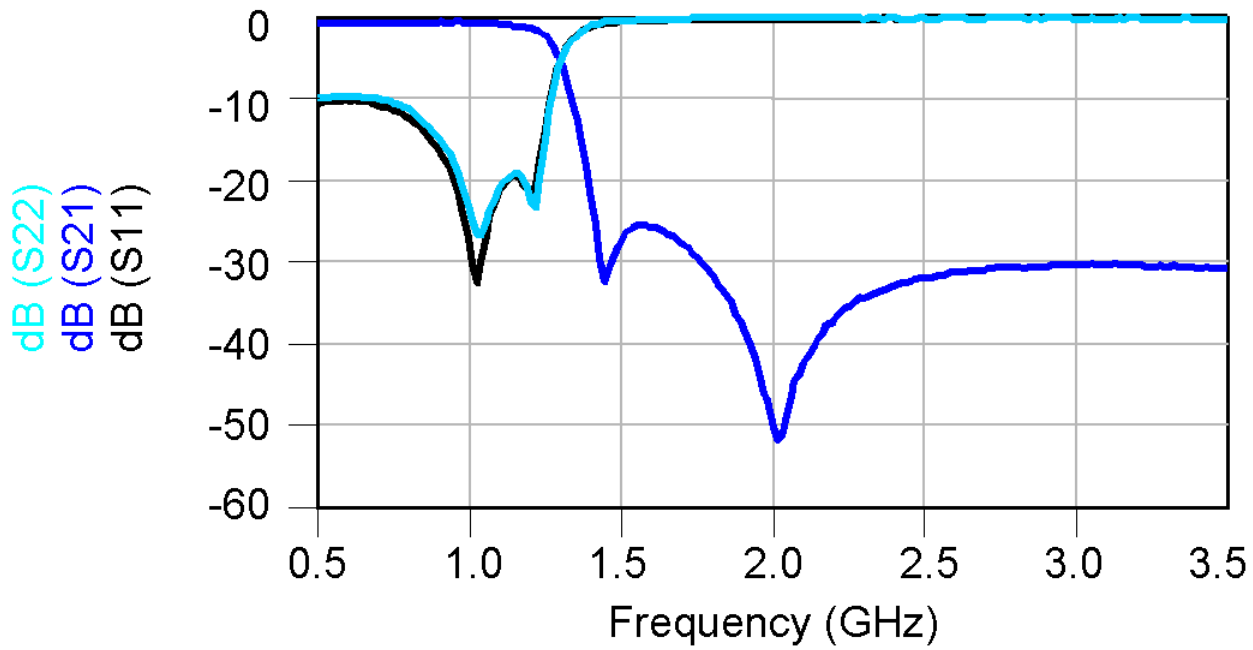

Delivery

Packaged in embossed tape on 7" reels (4000 / reel)
Standard delivery is eight weeks or sooner ARO