

"High Frequency Ceramic Solutions"

1.81 GHz Low Pass Filter

P/N 1810LP07A200

Detail Specification 02/13/2003


Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Attenuation (min.)	Return Loss
1810LP07A200_	1710 - 1910	0.5 dB max.	20 dB @ 2 x Fo 20 dB @ 3 x Fo	10.9 dB min.

Input Power	Impedance	Operating Temperature Range
3 Watt max	50 Ω	-40 to +85°C


Mechanical Dimensions

	L	W	T	a	b
Inches	0.039 ± .002	0.020 ± .002	0.015 ± .002	.006 ± .004	0.010 ± .004
mm	1.0 ± 0.05	0.50 ± 0.05	0.38 ± 0.05	0.15 ± 0.1	0.25 ± 0.1

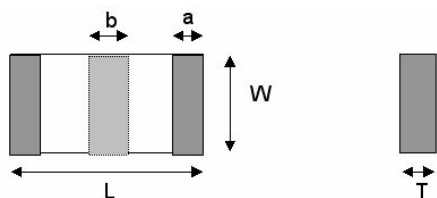




Terminal Configuration


No.	Function	No.	Function
1	GND	2	OUT
3	GND	4	IN



Mounting Considerations

Mount these devices with brown mark facing up. Line width should be designed to provide 50 Ω impedance matching characteristics. Units: mm

-  Solder Resist
-  Land
-  Through-hole (ϕ 0.35)
 ϕ 0.3

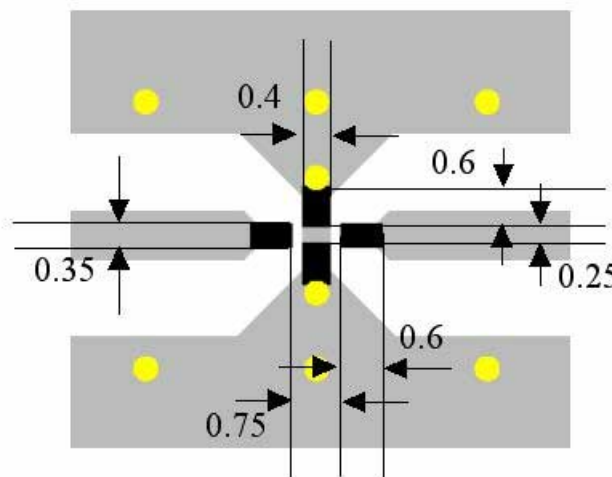

Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.

“High Frequency Ceramic Solutions”


1.81 GHz Low Pass Filter

Detail Specification 02/13/2003

P/N 1810LP07A200

Page 2 of 2

Typical Insertion Loss / Return Loss

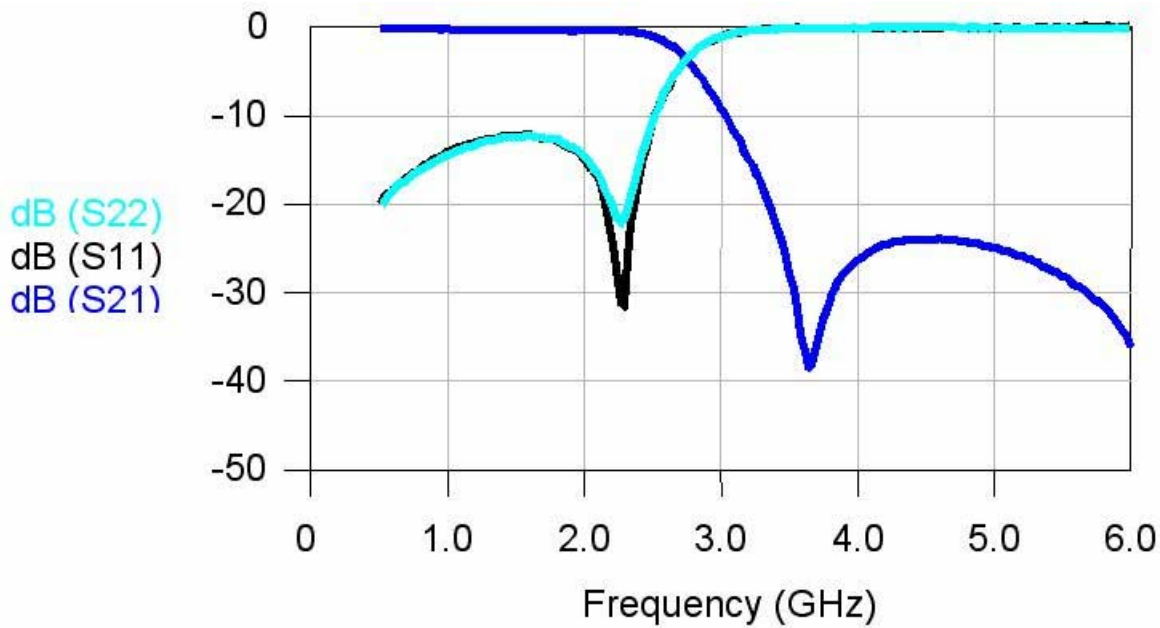

Packaging: Embossed tape on 7" reels (10,000 / reel)